

**ELECTRIC BICYCLE  
OWNER'S MANUAL**  
**KONA BICYCLE COMPANY**



**KONA**  
**B I C Y C L E S**

**CAUTION:** This owner's manual  
is to be read prior to operating  
your Kona electric bicycle.



# TABLE OF CONTENTS

<b>About this Manual</b> .....	<b>1</b>		
<b>General Warning</b> .....	<b>2</b>		
<b>2. Safety Must Always Be First</b> .....	<b>3</b>		
A) How is an E-bike Different from a Bicycle?.....	3		
<b>3. General Lithium-Ion Battery Safety</b> .....	<b>4</b>		
<b>4. E-bikes and Children: Attention Parents</b> .....	<b>5</b>		
A) How Old Should a Child Be to Operate an E-bike?.....	5		
<b>5. E-bike Features and Functions</b> .....	<b>7</b>		
A) Electric Drive Systems.....	7		
B) How Are E-Bikes Classified and Regulated?.....	8		
C) How Does an E-Bike Provide Power?.....	10		
D) Where Can I Ride My E-bike?.....	10		
<b>6. E-bike Battery Safety</b> .....	<b>11</b>		
A) General Knowledge and Safety.....	11		
1. What is an e-bike battery?.....	11		
B) Charging Your Battery.....	14		
1. Before charging your battery.....	14		
2. Recommended conditions for charging your battery.....	15		
3. How to charge your battery.....	16		
4. Storing your battery (long term).....	17		
C) Transporting Your E-Bike and Battery.....	18		
1. Transporting on a car rack.....	18		
2. Transporting on public transit.....	19		
3. Transporting on an airplane.....	19		
4. Shipping a battery.....	19		
5. Disposing of your battery (end-of-life).....	19		
<b>7. Safety Operating Your E-bike</b> .....	<b>20</b>		
A) Safety First.....	20		
B) Mechanical Safety Check.....	21		
C) Before Your First Ride.....	23		
D) Before Every Ride.....	24		
E) General E-bike Safety.....	25		
F) Lighting and Night Riding.....	26		
G) General Bicycle Safety.....	28		
H) Riding Safety.....	28		
I) Off-Road Safety.....	29		
J) Wet-Weather Riding.....	30		
K) Extreme, Stunt or Competition Riding.....	30		
L) Changing Components or Adding Accessories.....	31		
M) Walk-assist Mode.....	32		
N) Getting the Most Out of Your E-bike.....	32		
<b>8. Best Practices for Riding and Carrying Passengers and Cargo</b> .....	<b>34</b>		
A) Riding with Passengers.....	35		
B) Transporting Youth or Children.....	37		
C) Transporting Cargo.....	38		
1. Cargo e-bikes.....	38		
D) Using a Trailer.....	38		
<b>9. Drive Systems</b> .....	<b>39</b>		
A) General Information About Your Drive System.....	39		
<b>10. Fit</b> .....	<b>40</b>		
A) Standover Height.....	40		
B) Saddle Position.....	42		
C) Handlebar Height and Angle.....	43		
D) Control Position Adjustments.....	44		
E) Brake Reach.....	44		
<b>11. Technical Information</b> .....	<b>44</b>		
A) Wheels.....	44		
1. Front wheel secondary retention devices.....	46		
2. Wheels with cam-action systems.....	46		
3. Thru-axle wheel mounting system.....	47		
4. Removing and installing wheels.....	48		
B) Seat Post Cam-action Clamp.....	51		
C) Brakes.....	52		
1. Brake controls and features.....	52		
2. How brakes work.....	53		
D) Shifting Gears.....	53		
1. How a derailleur drivetrain works.....	54		
E) Pedals.....	55		
F) Bicycle Suspension.....	56		
G) Service Notes for Kona Full Suspension.....	56		
H) Tires and Tubes.....	57		
1. Tires.....	57		
2. Tubeless rims and tires.....	58		
3. Tire and rim width/diameter.....	59		
4. Tire clearance.....	59		
5. Tire valves.....	61		
<b>12. Maintaining and Servicing Your E-bike</b> .....	<b>61</b>		
A) Servicing the Electrical Drive System.....	61		
B) Servicing the Mechanical Parts of Your E-bike.....	62		
C) Service Intervals.....	63		
D) If Your E-bike Sustains an Impact.....	64		
<b>13. About Your KONA Authorized Retailer</b> .....	<b>65</b>		
A) Comfort & Performance Accessories.....	65		
<b>KonaWorld Website and Contact Info</b> .....	<b>66</b>		
<b>14. Limited Warranty</b> .....	<b>66</b>		
Appendix A – Intended Use of Your Bicycle.....	67		
Appendix B – The Lifespan of Your Bike and its Components.....	69		

**THANK YOU** for buying a Kona. A bicycle is a wonderful tool for transportation and recreation. We hope that you will ride it often and have a great deal of use and enjoyment from your purchase. This manual contains important safety, performance and maintenance information.

**IMPORTANT: Read this manual before taking your first ride on your new bicycle, and keep this manual handy for future reference.**

**NOTE:** This manual is not intended as a comprehensive use, service repair or service manual. Please see your authorized retailer for all service, repairs or maintenance. Your authorized retailer may also be able to refer you to classes, clinics or books on bicycle use, service or maintenance.

**ABOUT THIS MANUAL:** This owner's manual was prepared with your safety as our first consideration. A great deal of the text was prepared by a group of US-based bicycle manufacturers and distributors. Those sections are copyrighted by Kona Bicycle Company and the other companies using the same text, and may not be reproduced without the written consent of Kona Bicycle Company.

In addition to safety, many bicycle manufacturers and distributors are concerned with the alarming number of product liability cases brought forwards over the last 5 years. Because American and Canadian attorneys are entitled to mount these cases on a contingency basis, many larger manufacturers and distributors have been marked as deep pocket targets for what in many cases, turn out to have been the responsibility of the bicycle rider. Even the most frivolous cases are costly to the manufacturer and distributor, which additionally result in higher insurance premiums, and eventually, higher bicycle prices. The Consumer Product and Safety Commission has undertaken a variety of studies that find that, for the most part, bicycles are well-made and safe vehicles.

These studies conclude that many serious and minor accidents could be prevented by the use of helmets. It should also be noted that ACCIDENTS CAN ALSO BE PREVENTED BY PROPER INSTRUCTION OF BICYCLE USE AND MAINTENANCE. Your Kona authorized retailer will provide you with basic instructions to get you safely started. In addition, we strongly recommend that YOU READ THIS ENTIRE MANUAL PAYING PARTICULAR ATTENTION TO WARNINGS AND CAUTIONS.

So hang in there while you wade through the legalese. Yes we are trying to protect ourselves against unreasonable lawsuits, but we are concerned about your safety. A properly tuned and well-maintained bike keeps all parties happy... and parties, most happily.






Kona was started in the Pacific Northwest in 1988 by a group of cyclists dedicated to producing high-quality custom bicycles. With muddy, rooty, slippery temperate rainforest slopes as our backdrop, we prioritize durable, quality product designed to withstand seasons of demanding use through incessant rain and punishing terrain. You can find members of Kona's product design group evaluating new frames, suspension, and components on our nearby trails, ensuring the same 1988 founding sentiment rings true today: quality product, constant improvement, durable bikes.

As a result, we welcome your feedback. Improvement is a two-way street. If for any reason you're not satisfied with your bike, the service you were given, or anything at all (including but not limited to: prematurely soggy Rice Krispies, slow Internet, incessantly barking hound dogs... we're kidding – but not about your satisfaction and our quest for betterment) please let us know. And of course, thank you for joining the Kona family—we deeply appreciate your support and value your feedback.

**GENERAL WARNING:**

Like any sport, bicycling involves risk of injury and damage. By choosing to ride a bicycle, you assume the responsibility for that risk, so you need to know — and to practice — the rules of safe and responsible riding and of proper use and maintenance. Proper use and maintenance of your bicycle reduces your risk of injury.

This Manual contains many “Warnings” and “Cautions” concerning the consequences of failure to maintain or inspect your bicycle and of failure to follow safe cycling practices.

- The combination of the  safety alert symbol and the word **WARNING** indicates a potentially hazardous situation which, if not avoided, could result in serious injury or death.
- The combination of the  fire hazard alert symbol and the word **WARNING** indicates a potentially hazardous situation which, if not avoided, could result in serious injury or death.
- The combination of the  trip hazard alert symbol and the word **WARNING** indicates a potentially hazardous situation which, if not avoided, could result in serious injury or death.
- The combination of the  safety alert symbol and the word **CAUTION** indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury, or is an alert against unsafe practices.
- The combination of the  hot surface alert symbol and the word **CAUTION** indicates a potentially hazardous situation which, if not avoided, could result in burns.
- The word **CAUTION** used without the safety alert symbol indicates a situation which, if not avoided, could result in serious damage to the bicycle or the voiding of your warranty.

Many of the Warnings and Cautions directly express that “you may lose control and fall.” Because any fall can result in serious injury or even death, we do not always repeat the warning of possible injury or death.

Because it is impossible to anticipate every situation or condition which can occur while riding, this Manual makes no representation about the safe use of the bicycle under all conditions. There are risks associated with the use of any bicycle which cannot be predicted or avoided, and which are the sole responsibility of the rider.

**1. INTRODUCTION**


**IMPORTANT:** We strongly urge you to read this Manual in its entirety before your first ride. This Manual is intended to be an instructional Manual for youth and adult e-bikes. An e-bike is a bicycle or tricycle that may be powered by the rider AND a drive system, which includes an electric motor, battery, controls, sensors, connective wiring and typically one or more displays.

In the United States, e-bikes have drive systems of less than 750 watts and a top assisted speed of not more than 28 mph/45 km/h. In other markets, e-bike (or pedelec) drive systems may be limited to 250 watts and pedal-assisted speed of no more than 15 mph/25 km/h. **Please note that not all e-bikes have all of the features described in this Manual. Ask your authorized retailer to point out the features of your e-bike.**


An e-bike has many of the mechanical features of an unpowered bicycle, with the addition of an electrical drive system. This manual addresses both the mechanical and electrical aspects of e-bikes, and the user needs to understand both aspects of their e-bike to use it safely.


 **WARNING: Ownership, operation, charging and maintenance of an e-bike involve certain risks and**


hazards, which can be minimized by following safe practices addressed in this Manual. Your knowledge of and adherence to those practices are essential to your safety, the safety of others, and the protection of property, including your e-bike.

 Carefully read the information in this Manual and the model-specific manuals included with your e-bike, in order to learn how to properly operate and maintain your e-bike, as well as avoid damage to your e-bike. Proper and safe operation of your e-bike is your responsibility.

## 2. SAFETY MUST ALWAYS BE FIRST

 **WARNING:** Read all instructions in this Manual, as well as the model-specific instructions and documents provided with your e-bike. Failure to read and follow the instructions and warnings provided in this Manual and by the manufacturer may result in electric shock, fire or a crash resulting in serious personal injury or death.

 **WARNING:** It is not recommended to ride an e-bike if the rider is too young to do so safely, or has any mental or physical impairments (seizures or any impairments related to cognitive or physical, vision, hearing or speaking) or other limitations that may prevent the safe operation of the e-bike. Parents and guardians should carefully review Page 5, Section 4: "E-bike and Children: Attention Parents" of this Manual before allowing any minor child to operate an e-bike. If unsure, consult your physician.

 **WARNING:** Never loan your e-bike to another person or let another person operate your e-bike unless they are familiar with the instructions and warnings

in this Manual and competent to operate an e-bike. Allowing a person to operate an e-bike who lacks the knowledge or ability to safely do so may result in electric shock, fire or a crash, resulting in serious personal injury or death.

### A) HOW IS AN E-BIKE DIFFERENT FROM A BICYCLE

The addition of a motor and electric drive system means e-bikes are very different from regular bicycles in several ways, and have different risks associated with their use. When riding an e-bike for the first time, be sure to familiarize yourself with your e-bike by reading all product documentation and reviewing the features with your authorized retailer. Following are the major differences between an e-bike and a regular bicycle:

- **General Battery Safety and Fire Risks:** E-bikes are equipped with an electric drive system, battery and charger, which pose a risk of electrical and fire hazards. Please refer to **Page 4, Section 3:** "General Lithium-Ion Battery Safety" and **Page 11, Section 6:** "E-bike Battery Safety" for additional information.
- **Children and Age Requirements:** Use of e-bikes by children and youth may present additional risks. Age restrictions for operating or being a passenger on an e-bike vary depending on the type of e-bike and on the country or region where the e-bike is located. Operation may be limited by the age of the rider, and local jurisdictions may have other requirements for e-bike operation such as the use of helmets. Please refer to **Page 5, Section 4:** "E-bike and Children: Attention Parents" for additional information.
- **Features, Functions and Restrictions on Use:** The addition of an electric drive system means e-bikes are different from regular bicycles, and you need to familiarize yourself with these differences. E-bikes are also regulated differently depending on their speed and power settings,

and may have restrictions regarding where each type of e-bike can be ridden. These regulations and restrictions vary depending on your country or region. You must inform yourself of all applicable laws, requirements and restrictions. Please refer to **Page 7, Section 5**: “Features and Functions of your E-bike” for additional information on e-bike features, and **Page 10, Section 5(D)**: for additional information on e-bike laws and where you can ride your e-bike.

- **Charging your E-bike:** Using proper charging practices and taking care of your e-bike and its battery will maximize your use and enjoyment of your e-bike. Please read all manufacturer instructions specific to your e-bike’s battery and charger, and also refer to **Page 11, Section 6**: “E-bike Battery Safety” for additional information.


- **Safely Operating your E-bike:** E-bikes are heavier, accelerate faster, can achieve higher speeds more quickly and maintain those speeds for longer periods of time compared to regular bicycles. These features can dramatically affect the handling, braking and cornering of your e-bike, which means you must exercise more caution around other people and when cornering, accelerating and slowing down. It is recommended that you get to know the functionality and intricacies of accelerating and decelerating your e-bike in an area away from people and cars/traffic. Please refer to **Page 20, Section 7**: “Safely Operating your E-bike” for additional information.


- **Riding with Passengers, Cargo and Trailers:** Many e-bikes are designed to carry cargo or passengers. Riding with the additional weight from cargo or passengers requires practice and particular attention to your surroundings when riding. Please refer to **Page 34, Section 8**: “Best Practices for Riding and Carrying Passengers and Cargo” for additional information.

- **Drive Systems:** The drive system on your e-bike is a

sophisticated electronic system that requires special care and maintenance. Any service to the drive system should be performed by a qualified technician. Please refer to **Page 39, Section 9**: “Drive Systems” for additional information.

### 3. GENERAL LITHIUM-ION BATTERY SAFETY

 **WARNING:** Before charging or using your e-bike, you must carefully read, understand and follow all information contained in **Page 11, Section 6: “E-Bike Battery Safety”** of this Manual about safety, handling, charging, transportation, storing and disposing of your e-bike battery. It is recommended that you periodically review this information to ensure you are following all recommendations for safe use of this product. Failure to read, understand and follow all battery safety warnings and instructions can cause a fire, leading to serious personal injury, death or property damage.

 **WARNING:** Lithium-Ion batteries are powerful and store a tremendous amount of energy. While they are generally designed with safety features to protect the battery and the user, they must be handled with special care. When damaged, improperly charged or misused, Lithium-Ion batteries are susceptible to an uncontrollable energy release resulting in a sudden and severe fire. A Lithium-Ion battery fire generally cannot be put out until the energy contained therein is exhausted. Therefore, proper use, charging, discharging, care, maintenance, storage and transportation are all critical to the long-term use of the battery and the safety of the user and others.

 **WARNING:** Do not leave a battery unattended while charging, especially overnight. Once the charge cycle is complete, immediately disconnect the charger

**plug from the battery. Do not leave the battery connected to the charger for an extended period of time after it has reached full charge. If a battery fails while left to charge unattended, the failure can get progressively worse, and can result in fire or explosion resulting in serious personal injury, death, or property damage.**

**⚠ WARNING: NEVER open a Lithium-Ion battery pack or modify the wiring or any electrical components of any product powered by a Lithium-Ion battery. Opening the battery or modifying the wiring or components can result in electric shock and can cause a fire leading to serious personal injury, death, or property damage.**

#### **General Safety Guidelines for All Lithium-Ion Batteries:**

**ALWAYS:** Purchase and use devices and batteries certified by an accredited testing laboratory.

**ALWAYS:** Follow the manufacturer's instructions for charging and storage.

**ALWAYS:** Use the correct battery, charger and cord.

**ALWAYS:** Plug directly into an electrical outlet for charging.

**ALWAYS:** Keep batteries and devices at room temperature.

**ALWAYS:** Store and charge batteries away from anything flammable.

**ALWAYS:** Keep batteries away from heat sources.

**ALWAYS:** Use proper methods for recycling old or damaged batteries.

**NEVER:** Use aftermarket or generic batteries or chargers.

**NEVER:** Plug into a power strip or overload an outlet.

**NEVER:** Overcharge or leave a battery charging overnight.

**NEVER:** Charge a battery or device on or close to any flammable material.

**NEVER:** Leave an e-bike or battery unattended while charging.

**NEVER:** Block your primary way in or out of a room or space.

**NEVER:** Place batteries in a trash or recycling bin.

## **4. E-BIKES AND CHILDREN: ATTENTION PARENTS**

### **A) HOW OLD SHOULD A CHILD BE TO OPERATE AN E-BIKE?**

This Manual covers e-bikes that may be used by both adults and older youth. The manufacturer of an e-bike cannot determine whether a particular child should or should not operate an e-bike. While e-bikes have a lot in common with regular bicycles, e-bikes also have a motor and battery, which means e-bikes weigh significantly more and can achieve significantly higher speeds, with much faster acceleration. A significant amount of strength and skill is required to safely control an e-bike. As a parent, you should read this Manual, as well as review its warnings and the e-bike's functions and operating procedures with your child before letting your child ride the e-bike.

While it is up to a parent or guardian to make the determination of whether their child can safely operate an e-bike, you should be aware of these general guidelines. According to the United States Consumer Product Safety Commission (CPSC), motorized bicycles require cognitive skills and motor skills that usually develop after age 12.

The CPSC's Age Determination Guidelines are available on their website at: [www.cpsc.gov](http://www.cpsc.gov)

Any youth or child riding an e-bike must have the necessary physical, mental and emotional capacity to ride the e-bike, as well as adequate bicycle riding experience and reaction

time. They must also adhere to local laws, know how to manage different/changing road conditions, how to navigate traffic, and how to react quickly to unexpected situations.

**NOTE:** Local laws may vary regarding how old a child must be and what type of e-bike they can operate. It is up to the parents and child to conform to local laws.

**⚠ WARNING: A child should never ride an e-bike that is too big for them. While some e-bikes have step-through frames [see fig. 2] that may allow a child to mount an e-bike, that does not mean the e-bike is the right size for them to operate safely. An e-bike that is too big for a child may lead to a loss of control and fall, resulting in serious personal injury or death.**

**⚠ WARNING: Some e-bikes may not be suitable for some children. Consult the documentation provided by the manufacturer of your e-bike for any information about age recommendations or restrictions. Parents must ultimately be responsible to determine whether their child is physically, mentally and emotionally capable of safely operating an e-bike, including understanding and following all warnings and instructions in this Manual. Allowing a child who lacks the capability to safely operate an e-bike to do so may lead to a crash resulting in serious personal injury or death.**

**⚠ WARNING: Some states have age restrictions for transporting passengers. A child must be of age to ride an e-bike independently, or be of age as specified by the manufacturer to be a passenger on an e-bike, unless the child is in an approved child carrier that has been properly fitted. Transporting a child that does not meet the age/physical requirements to be a passenger and/or is not in an approved child carrier can result in serious personal injury or death.**

Read all relevant passenger-related information provided with your e-bike, and consult with your authorized retailer for any additional information. Assessing the passenger's ability and safety is the parent's responsibility. If you're unsure, consult with your physician.

**NOTE:** For additional information regarding transporting passengers, please refer to **Page 34, Section 8:** "Best Practices for Riding and Carrying Passengers and Cargo".

**⚠ WARNING: A person must have the physical and mental ability to manage an e-bike in traffic, when facing varying road conditions or when in unexpected situations. They must also respect the laws of the road as they apply to bicycles. Failure to follow this warning could result in a crash leading to serious personal injury or death.**

As a parent or guardian, you are responsible for the activities and safety of your minor child, including making sure that:

- your child wears a well-fitting and approved helmet at all times while operating or riding on the e-bike.
- the e-bike is properly sized and fitted to your child.
- the e-bike is in good repair and safe operating condition.
- you and your child have learned and understand the safe operation of the e-bike as described in this Manual.
- you and your child have learned, understand and obey not only the applicable local motor vehicle, e-bike and traffic laws, but also the common-sense rules of safe and responsible bicycling.

**⚠ WARNING: Make sure that your child always wears an approved bicycle helmet when riding. Also make sure that your child understands that a bicycle helmet is for riding only, and must be removed when not rid-**

ing. A helmet must not be worn while playing, in play areas, on playground equipment, while climbing trees or at any time while not riding. Failure to follow this warning could result in serious personal injury or death.

**⚠ WARNING:** Whether a child can safely operate an e-bike also depends on where the e-bike is being operated and the conditions present. Steep hills, wet or poor quality roads or trails, motor vehicle traffic, inclement weather, carrying passengers or cargo or other conditions may suddenly present risks that a child may lack the ability to respond to. The risks of operating an e-bike on public roads are different from operating an e-bike on natural-surface trails. Please read this Manual for more information on these risks and how to avoid them. Failure to follow this warning could lead to a crash resulting in serious personal injury or death.

## 5. E-BIKE FEATURES AND FUNCTIONS

E-bikes are manufactured by multiple companies and brands, each of which uses a variety of drive systems. These systems each have their own features and functions like motor and battery location, power output, battery capacity and maximum speed, as well as methods for charging and storing your battery and starting and operating the system. As such, you must familiarize yourself with the unique features and functions of your e-bike.

The e-bike-specific information included in this Manual covers universal topics shared by all e-bikes. For information that is specific to your e-bike, please refer to the model-specific manuals provided by your e-bike manufacturer, or consult your e-bike retailer or manufacturer.

Please refer to your authorized retailer or manufacturer for any questions about e-bike functions, local laws and

regulations, parts compatibility, service intervals, as well as rider, cargo and passenger weight limits.

### A) ELECTRIC DRIVE SYSTEMS

E-bikes differ from regular bikes with the addition of sophisticated components, engineered specifically for use on e-bikes. These components include:

- **Battery:** A sophisticated, high-performance, large-capacity Lithium-Ion battery, designed to safely contain a significant amount of energy and efficiently release it to the motor in order to supplement the rider's power output for long distances.
- **Motor:** Provides power assistance to the rider when the pedals are engaged. Certain types of e-bike are also equipped with a throttle to engage the power.
- **Controls:** Buttons located on the display, handlebar, battery and/or frame that allow the rider to choose the level of motor assistance while pedaling.
- **Sensors:** Detect forces being applied to the pedals or rotation of the pedals, provide information to the system to control power output.
- **Display(s):** Provide the rider with relevant information about the ride, such as speed, distance, power output, and battery charge [**fig. 3**].
- **Wiring system:** Connects the drive system components.

The addition of an integrated drive system means your e-bike is different from a regular bicycle. These differences mean you must follow all instructions in your manuals, and you should not treat your e-bike the same as a regular bicycle. This Manual will address how to handle and properly use an e-bike equipped with these unique components.

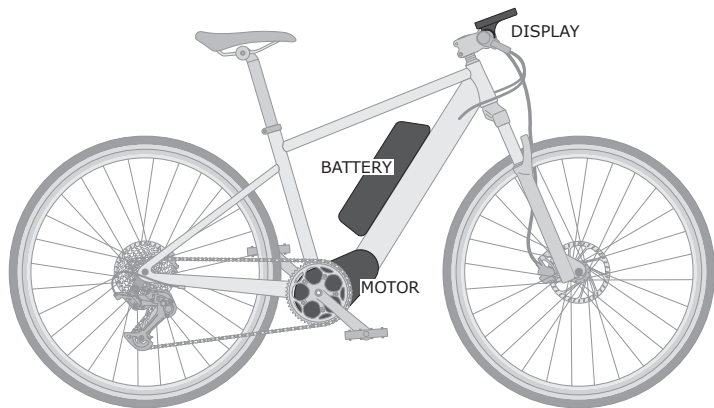


fig. 1 — Typical mid-drive e-bike

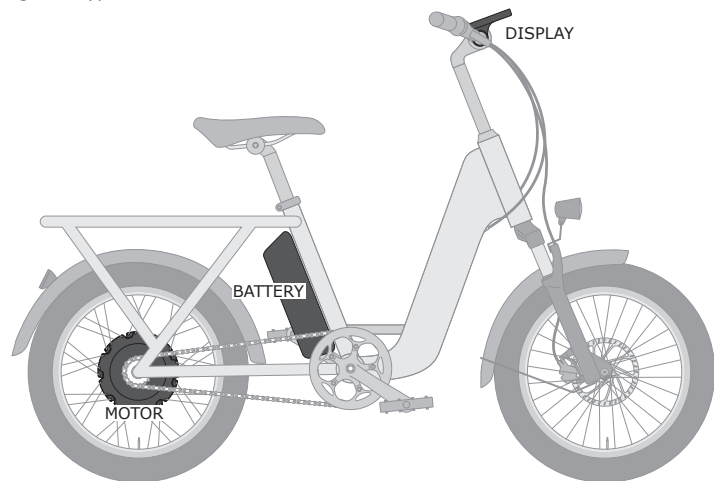


fig. 2 — Typical hub drive e-bike

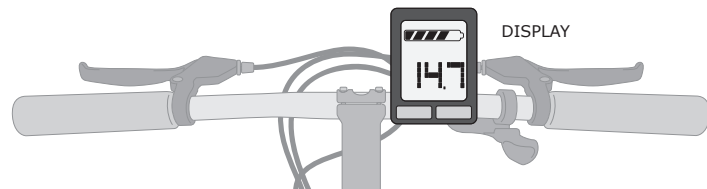


fig. 3 — E-bike display

## B) HOW ARE E-BIKES CLASSIFIED AND REGULATED?

**NOTE:** The speed settings for your e-bike may be set according to the country or region where the e-bike is sold. Follow all national, regional and local regulations related to your e-bike. Following are some examples for how e-bikes are defined by country:

**United States:** Most states have defined three e-bike classes and regulate them within the state's motor vehicle code. This gives riders similar rights and duties to that of regular bicycles. However, a few states regulate e-bikes in the same way as mopeds or a motor vehicle such as a car or motorcycle. Be sure to familiarize yourself with the laws relevant to your e-bike in your country and region, or ask your authorized retailer about these local laws.

- **Class 1:** Bicycle equipped with a motor that provides assistance only when the rider is pedaling, and that ceases to provide assistance when the electric bicycle reaches 20 mph [fig. 1].
- **Class 2:** Bicycle equipped with a throttle-actuated motor, that ceases to provide assistance when the electric bicycle reaches 20 mph.
- **Class 3:** Bicycle equipped with a motor that provides assistance only when the rider is pedaling, and that ceases to provide assistance when the electric bicycle reaches 28 mph.

**NOTE:** The speed settings for your e-bike may be set according to the region where the e-bike is sold. Follow all local/regional regulations related to your e-bike.

E-bike specifications can also include wattage (how much work a motor can do), torque (how much force the motor can apply) and battery watt hours (how long the battery will last or the typical range of the e-bike).

**Europe:** Under European regulations, an e-bike drive system only provides power when the pedals are engaged. This type of e-bike is typically referred to as an EPAC (Electronically Power Assisted Cycles or Electrically Power Assisted Cycles), EAPC (Electrically Assisted Pedal Cycles), or Pedelec (Pedal Electric Cycle).

Europe also recognizes a category of higher power and speed e-bikes known as the "Speed Pedelec", or "S-Pedelec". These e-bikes also provide power only when the rider is pedaling, but may have motor power up to 4000 watts and a top speed of up to 28 mph/45 km/h. European regulations for Speed Pedelecs require that certain components must be replaced with identical components, meaning ones that have been manufactured or approved by the manufacturer.


Speed Pedelecs are sometimes classified as motor vehicles, depending on local laws. This means that in those places some or all of the following may be required:

- A rear-view mirror.
- A license plate.
- Liability insurance, operating license or EU-type approval with insurance markings attached.
- A minimum tire tread depth of 1 mm.
- Tires replaced when worn with an identical (or approved) tire.

When using a Speed Pedelec, the rider must be familiar with the local laws for riding on:

- Cycling paths.
- Road lanes marked for moped access.
- Cycling paths that allow mopeds.
- Off-road trails.
- Lanes that are closed to mopeds, motor vehicles or motorcycles.
- Public roads, as well as on private property with permission by owner.
- Pedestrian areas where regular bikes are allowed.
- Parking in areas for regular bikes.

As e-bike regulations are constantly being updated, it is your responsibility to stay up-to-date on the latest regulations (helmet use, age restrictions, requirements for license and insurance), as well as any restrictions for where you can ride your e-bike (roads, paths, parks or other facilities).

 **WARNING: Do not modify or alter your e-bike, or install additional equipment with the intention of increasing the performance and/or top speed of the e-bike. Modifying an e-bike to increase its performance or speed may be unlawful and can result in component failure or a loss of control, leading to a crash resulting in serious personal injury or death.**

**NOTE:** A modified e-bike may no longer be regulated as an e-bike, placing the operator at risk of personal liability and criminal prosecution in the event of a crash. Any alterations can negatively affect the lifespan of the e-bike and its components, and can result in damage to the drive system. It can also void the warranty of the e-bike.

## C) HOW DOES AN E-BIKE PROVIDE POWER?

Pedal-assist is the power provided by the drive system to the rear wheel. For Class 1 and Class 3 e-bikes and Pedelecs, the drive system is designed so the power provided by the motor is dependent on pedal force being applied by the rider. The amount of power provided by the motor is determined by how hard or easy the rider is pedaling (the harder the rider pedals the more power the motor provides) in combination with the power-assist mode chosen by the rider, up to the maximum speed determined by the classification of the e-bike and the regulations put in place by the country where the e-bike is sold.

For Class 2 e-bikes, the pedal force and/or the throttle may determine the amount of power supplied by the drive motor to the rear wheel.

**NOTE:** This Manual is only for e-bikes that are manufactured as complete e-bikes and designed to apply power through the rear wheel, with either a “mid-drive” motor [fig. 1] or motor contained in the rear hub [fig. 2]. This Manual does not cover other types of e-bikes, including front-wheel drive, conversion kits, or “add-on” electric motors of any kind.

## D) WHERE CAN I RIDE MY E-BIKE?

### The Three-Class Approach

In the United States, state and local governments have the authority to determine where e-bikes can be operated, including restricting their use. It is recommended to check the rules and regulations for your e-bike class that apply where you live and/or ride. In most states, e-bikes are regulated using a three-class approach.

- Class 1 e-bikes, when regulated in the same way as

regular bikes, can generally be used in the same places as regular bikes, including but not limited to bike paths, lanes, routes and protected lanes.

- Class 2 e-bikes, while often similar to Class 1 e-bikes, also include the addition of a throttle which allows the use of the e-bike without pedaling. This fundamental difference can impact and/or limit where a Class 2 e-bike can be ridden.
- Class 3 e-bikes may have greater limitations due to their higher power-assisted speed. Use on bike paths, lanes, routes and protected lanes may not be allowed.

**NOTE:** In Canada, Europe and other countries, national, regional and local laws determine which types of e-bikes are allowed and where an e-bike of each type may be operated. As these laws can be subject to frequent changes, you should consult and comply with your local laws.


### Off-Road Respect

Additionally, off-road trail access is sometimes restricted to use only on trails that allow for motorized vehicle use. Off-road e-bikes, often referred to as eMTBs, may not be permitted for use on your local trails, or only Class 1 e-bikes may be allowed. As local land use rules change frequently, be sure to consult with your local land manager.

Obey the local laws regulating where and how you can ride off-road, and respect private property. You may be sharing the trail with others — hikers, trail runners, equestrians and other cyclists. Respect their rights. Stay on the designated trail. Don't contribute to erosion by riding in mud or with unnecessary sliding or skidding. Don't disturb the ecosystem by cutting your own trail or shortcut through vegetation or streams. It is your responsibility to minimize your impact on the environment. Leave things as you found them; and always take out everything you brought in.

## 6. E-BIKE BATTERY SAFETY

### A) GENERAL BATTERY KNOWLEDGE AND SAFETY

 **WARNING:** Carefully read this section and Page 4, Section 3: “General Lithium-Ion Battery Safety” before using your e-bike or charging the battery. Improper use, storage or charging of the battery can cause thermal runaway leading to a sudden and severe fire resulting in property damage, serious personal injury or death.

#### 1. What is an e-bike battery?

An e-bike battery consists of a series of Lithium-Ion cells designed to contain electric energy. The charge and release of energy in the cells is managed and controlled by internal circuitry. The cells and circuitry are contained in a housing or shell, also known as a battery pack, which is designed to protect the cells and internal circuitry and interface with a mounting mechanism on your e-bike.

E-bike batteries store a tremendous amount of energy for their small size and light weight. While batteries are generally designed with safety features to protect the battery and its user and failure is therefore unlikely, it's not impossible so they must be handled with special care.

When damaged or improperly used, Lithium-Ion batteries are susceptible to an uncontrollable energy release. This means there is a risk of a sudden and severe fire, and a Lithium-Ion battery fire generally cannot be put out until the energy contained therein is exhausted. Therefore, proper use, charge/discharge, care, maintenance, storage and transportation are critical to the long-term use of the battery and the safety of the user.

 **WARNING:** Batteries and chargers are designed to be safe and reliable for their intended use. Failure to

read and follow these instructions and use your battery as intended by the manufacturer can result in thermal runaway, resulting in a sudden and severe fire and serious personal injury or death, as well as significant property damage. Please follow the guidelines below to minimize the risk of battery pack failure:

- **Only** use the battery supplied with your e-bike, or a replacement battery that is designed specifically for use with your e-bike.
- **Only** use a charger that is supplied with your battery, or that is confirmed as compatible by the battery or e-bike manufacturer. **Do not** use other chargers or power supplies to charge your battery pack.
- **Do not** leave the battery unattended while charging, especially overnight. Once the battery is fully charged, disconnect the charger from the battery.
- **Do not** charge or store the battery in direct sunlight, or in an environment that is outside the temperature range specified by the battery manufacturer.
- **Do not** expose the battery to excessive heat from a flame or other heat source, or extended exposure to the sun.
- **Do not** expose the battery internals to water by submersion or strong water spray.
- **Do not** subject the battery to excessive weight from objects placed on the battery.
- **Do not** subject the battery to severe impact or shock from being dropped or struck by another heavy object.
- **Do not** subject the battery to excessive vibration.
- **Do not** use or attempt to charge a battery that has been dropped, damaged, or submersed in water.
- **Do not** open or deform the battery housing and/or perform any modifications or service to the battery. There are no user-serviceable components in the battery pack. Opening a Lithium-Ion battery may result in a hazardous

condition that could lead to an explosion and/or fire, and will void the warranty.

- **Do not** short-circuit the battery terminals through contact with metal objects (e.g., nails, keys or screws).
- **Do not** touch severely corroded battery terminals.
- **Do not** apply solder to the terminals.

The following is a list of signs of battery damage, which can result in electric shock, short-circuit, fire and/or explosion:

- External battery casing damage (chips, cracks).
- Battery casing deformation (bulging).
- Battery casing or terminal discoloration.
- Signs of corrosive (rust) damage from water entering the battery.
- Plug connector damage or deformation.
- Sounds, odors, smoke and/or flames emanating from the battery.
- Battery fluid leak.

**⚠ WARNING: A battery should not exhibit any heat, flames, noises, odors, smoke, swelling, leaks, discoloration, deformation or other abnormalities. If a battery exhibits any of these symptoms and is failing catastrophically, evacuate all people from the area immediately and summon fire authorities (in the United States, call 911). Only if it is possible to do so safely and quickly should you attempt to move the battery outdoors and away from people or flammable materials.**

**⚠ WARNING: If the battery is leaking, do not touch this liquid. Battery liquid can cause irritation or burns. If there is contact with battery liquid, rinse immediately with water. If the contact is with the eyes, seek medical attention immediately after rinsing.**

**⚠ WARNING: If the battery is emitting any smoke or fumes, move to a place with proper ventilation. Fumes**

**can irritate the respiratory system. If anyone is exposed to any smoke or fumes and experiencing negative effects, seek medical attention.**

**⚠ WARNING: If your battery experiences a fault or error during use, charge or discharge, immediately stop using or charging the battery, check the manual provided by your manufacturer, and have the battery inspected and if necessary, replaced by your authorized retailer.**

**CAUTION: Due to the natural process of transferring electricity and storing it inside the battery cells, the battery and charger housings can get hot while charging. Use caution when touching the battery and charger while charging. Additionally, the battery housing can get warm during use.**

**⚠ WARNING: Do not install the battery on the e-bike if the following circumstances are present:**

- The battery is not original to the e-bike or an exact replacement battery from the e-bike manufacturer that is fully compatible with the e-bike.
- The battery is damaged in any way.
- The battery has been exposed to excessive water or submersion.

**Failure to follow these warnings may cause a fire resulting in property damage, serious personal injury or death.**

**NOTE:** Ensure the battery contacts (connecting terminals or pins) that interface with the e-bike are clean. A dirty/contaminated interface can result in difficulty installing/removing the battery, or the battery getting stuck. Dirty or corroded battery terminals can cause a significant increase in resistance to current flow between the battery and the e-bike, resulting in significant heat build-up which will compromise range and may damage the battery and e-bike.

Clean the battery and electrical contacts using a soft, dry or lightly damp cloth to keep the battery free of dirt and debris. Do not expose the battery to harsh chemical cleaners or products. Do not use alkali or acid-based solvents (e.g., rust cleaners).

If the charge port has a cover, close the cover after charging to keep the charge port terminals clean and dry.

**⚠ WARNING: Keep the battery and charger away from children and animals. Unless supervised or instructed on proper/responsible use, children or people who lack the necessary experience or understanding to operate the battery and charger safely should not be left unattended with the battery and charger. There is a significant risk of personal injury and/or damage.**

**⚠ WARNING: Turn the battery and e-bike off before installing or removing the battery. For information on battery installation and removal, please refer to the manufacturer's instructions for your e-bike model.**

**⚠ WARNING: Do not attempt to install or remove the battery while riding.**

**⚠ WARNING: Before transporting, storing or performing any work on your e-bike, remove the battery, or turn it off if the battery cannot be removed. A drive system with a battery installed can turn on unexpectedly, which can cause serious injury.**

**⚠ WARNING: If installing components or accessories that require wiring or servicing your e-bike, it is recommended to remove the battery before performing the installation or service to avoid the risk of shock.**

**⚠ WARNING: Do not pressure-wash your e-bike or battery with a hose or other pressure-washing device.**

**If the battery is removable, remove the battery when cleaning your e-bike.**

**⚠ WARNING: When handling components (especially the battery), handle with both hands. Failure to do so may result in dropping the component, which can result in personal injury and/or damage to the component.**

**CAUTION: When using rack-mounted batteries, unless designed specifically for this purpose and approved by the manufacturer, do not use the rack or battery as a handle to lift the e-bike. This can result in damage to the battery.**

Always make sure the battery is securely installed. If there's a lock, engage it and remove the key.

If your battery has a key, take note of the manufacturer and number of the key. In the event of a lost key, please contact your authorized retailer. Familiarize yourself with the charge level indicator lights on your e-bike system, to know when it is at capacity, as well as if your battery is in danger of shutting off during use due to lack of battery power.

**CAUTION: Do not discharge your battery completely (deep discharge) as this can damage the battery or shorten its useful life. A battery that runs out of power during a ride is functionally depleted. If it is left for an extended period of time (days) after being functionally depleted, it will naturally lose more power while not being used, which can lead to a state of deep discharge. This state of deep discharge can damage a battery resulting in significantly reduced energy capacity, and it can make it difficult to properly recharge, or worse, render it unserviceable, even with help from a qualified technician. After use and once cooled down, it is recommended to fully charge the battery in preparation for your next ride.**

Pay particular attention to the specific charging habits, as well as the operating and storage temperatures recommended by the e-bike manufacturer. Lithium-Ion batteries have an ideal operating temperature range to maximize efficiency and performance. Exposure to extreme temperatures outside the manufacturer's specified range during charging, use or storage may negatively impact the efficiency, performance and lifespan of the battery, as well as damage to the drive system components. Lithium-Ion batteries are especially vulnerable to cold temperatures. The colder a battery is, the lower the energy capacity and range.

Unless explicitly stated by the manufacturer, Lithium-Ion batteries do not require a break-in period. They can also be turned off and connected or disconnected from the charger at any time regardless of the state of charge without damaging the battery.

If the battery will not be used for longer than a few days, if possible, disconnect the battery and remove it from the e-bike. This can help prevent a parasitic power drain.

**⚠ WARNING: E-bike batteries are intended only as a power supply for approved e-bikes. Do not use e-bike batteries for any other applications. Use of an e-bike battery for other applications may create a risk of fire or electric shock.**

## B) CHARGING YOUR BATTERY

**⚠ WARNING: Carefully read, understand and follow all warnings and instructions for charging your battery. Failure to do so can lead to an electrical shock or sudden and severe fire, resulting in serious personal injury or death.**

### 1. Before charging your battery

Before using your e-bike or charging your battery for the first

time, read all the instructions in this Manual and any product documentation included with your e-bike. Turn the battery power on according to the manufacturer's instructions.

This will help determine if the battery is charged, needs charging or is damaged. Batteries are generally shipped from the manufacturer with a partial charge. It is recommended to charge the battery to full capacity before your first use.

**⚠ WARNING: Charging the battery when any of the conditions listed below are present can result in electric shock, serious personal injury, or damage to the battery or property. Do not connect the charger to the battery and charge the battery if any of the following circumstances are present:**

- **The battery charge port terminals and/or the charger plug are contaminated. Repeatedly connecting contaminated terminals can result in worn and damaged terminals. Clean thoroughly before connecting the charger.**
- **The battery, battery charge port, charger or charger plug ends have been submerged or are wet. Additionally, do not handle the battery, charger or any charge port terminals with wet hands. Dry everything thoroughly before connecting the charger.**
- **The battery is in an area exposed to explosive materials (e.g., a fueling station), or is exposed to chemicals or other flammable particles in the air.**
- **The battery has been dropped, noticeably scratched or damaged in any way.**
- **The charger shows any signs of damage. Inspect before each use.**

**⚠ WARNING: Unless explicitly stated by the manufacturer, only use the charger indoors. Do not expose the e-bike, battery or charger to the rain and wind**

while charging. Exposure to water while charging may create a risk of electric shock or fire, resulting in serious personal injury, death or property damage.

**⚠ WARNING: Only use Original Equipment (OE) batteries and chargers that are compatible with each other, and have been specified and approved by the manufacturer for use with each other and with your e-bike. The charger, charge cord and power output cable must be specified for use with your battery. Use of an unapproved or counterfeit battery or charger can result in serious damage to the battery and/or components and can result in a sudden and severe fire or explosion resulting in serious bodily injury or death.**

**⚠ WARNING: Do not modify or open the charger. Opening or modifying the charger can result in electric shock or damage to the internal circuitry that is designed to reduce the risk of thermal runaway, leading to a fire resulting in serious personal injury, death or property damage.**

**⚠ WARNING: Do not touch the terminals of the battery or charger during an electrical storm in case of a lightning strike.**

**⚠ WARNING: Handle the charger and power cables with care. Do not tightly bundle, apply excessive tension (pull force) or carry by the cables. Do not wash the charger.**

## 2. Recommended conditions for charging your battery

**⚠ WARNING: Carefully read, understand and follow all manufacturer warnings and instructions for charging your battery. Batteries are sophisticated devices that require proper charging conditions. When charging a bat-**

**tery, ensure all the conditions below are present. Failure to do so can lead to an electrical shock or sudden and severe fire, resulting in serious personal injury or death.**

- The battery and charger are compatible with each other and the e-bike.
- The battery is being charged during daylight hours and where it can be observed in case of any indication of odor, smoke, fumes or fire.
- The charging area is protected from the elements, dry, well-ventilated, and has a smoke detector. If you charge your battery indoors, do not do it in a bedroom or any place blocking egress from the area. A charging battery cannot be left unattended and must be observed at all times while charging.
- The battery is on a clean, dry and flat, non-flammable surface, preferably metal, ceramic or glass.
- The battery and the charge port connectors (terminals or pins) are dry, clean and free of debris.
- The battery and charger have no items covering or placed on top impeding airflow around these components.
- The battery is not exposed to flammable materials or an open flame.
- The ambient temperature around the battery and charger is in the charging temperature range specified by the manufacturer.
- The rated voltage capacity from the power source (electrical outlet) matches the charger.
- The charger's outlet plug and battery connector plug are both fully inserted into the electrical outlet and the battery's charge port.
- The charger's fan vent is unobstructed (chargers with built-in fans).
- Do not use a power converter, for example to convert 220 volts to 110 volts.

### 3. How to charge your battery

Follow the order of operations for connecting the charger and charging the battery [fig. 4] as outlined by your e-bike manufacturer. An improperly connected charger can result in damage to the drive system components.

- Remove the charge port cover (if present).
- Connect the charger to the battery and the power outlet, in the order specified by the manufacturer.
- Once charging begins, periodically refer to the indicator lights on the charger and e-bike's charge level display for power level information.
- Once the indicator lights indicate a full charge, immediately disconnect the charger from the power outlet and the battery, in the order specified by the manufacturer.
- Replace the charge port cover (if present).
- If the battery will not be used right away, store the battery as outlined on **Page 17, Section 6**: "E-bike Battery Safety", **subsection B.4**: "Storing Your Battery".

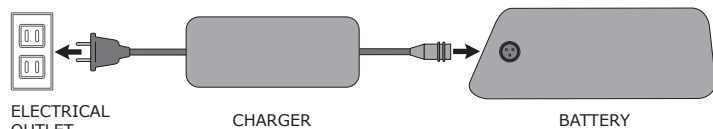


fig. 4 — Charger and battery

**⚠ WARNING: Do not leave a battery unattended while charging, especially overnight. Once the charge cycle is complete, immediately disconnect the charger plug from the battery. Do not leave the battery connected to the charger for an extended period of time after it has reached full charge. If a battery fails while left to charge unattended, the failure can get progressively worse, and can result in fire or explosion resulting in**

**serious personal injury, death, or property damage.**

**⚠ WARNING: Do not ride the e-bike with the charger plugged into the battery.**

**⚠ WARNING: Do not move the e-bike or allow it to fall while it's charging. Make sure the e-bike is stable and cannot move easily. If the plug comes loose during the charging process, it can cause an electrical spark leading to a fire, resulting in serious personal injury or property damage.**

**⚠ WARNING: TRIP HAZARD! When charging, be aware of the location of the charger cable. Tripping over the charger cable can result in a fall, leading to personal injury or cause the e-bike to fall over, resulting in property damage.**

**⚠ WARNING: Do not use a power inverter to charge the battery from a 12-volt automobile auxiliary power outlet in a vehicle. Incorrect or excessive voltage can result in overheating, which can damage the battery and reduce the battery's lifespan or cause a sudden and severe fire resulting in serious personal injury or property damage.**

**CAUTION: Do not remove the battery from the e-bike during the charging process. If the battery has to be removed, first end the charging process before removing the battery from the e-bike, then once the battery is in a proper state for charging, restart the charging process.**

E-bike batteries have temperature sensors that prevent charging when outside of the range specified by the manufacturer. Please refer to the manufacturer's specifications for additional information.

If the battery is being charged outside the recommended

temperature range, the battery will indicate a charging issue. If the battery is not charging, disconnect the charger and adjust the conditions so the temperature is within the specified range. Only reconnect the charger once the battery is within the specified temperature range.

If the conditions for charging are all correct but the battery is not charging, or it's not fully charged hours after the manufacturer's specified charge time, disconnect the charger and have the battery and charger inspected by your authorized retailer.

**⚠ WARNING: If the battery becomes too hot, starts to emit smoke or a strong odor, shows any signs of deformation/bulging, or otherwise presents unusual characteristics, discontinue use of the battery. If a battery exhibits any of these symptoms and is failing catastrophically, evacuate the area immediately and call fire authorities. Only if possible to do so safely and quickly should you attempt to move the battery outdoors and away from people and flammable materials.**

#### **4. Storing your battery (long-term storage)**

Even under the best of circumstances, the energy storage capacity of Lithium-Ion batteries gradually degrades over time and with each charging cycle. However, by following proper care and storage habits as specified by the manufacturer, you can maximize the lifespan of the battery. Please read and follow the storage recommendations below.

If the battery will be in storage for an extended period of time, it is recommended the battery be stored with a partial charge, and the state of charge should be checked periodically in accordance with the manufacturer's specifications. If the state of charge has dropped below the manufacturer's recommended range, charge it back to within the range. Please refer to the manufacturer specifications for additional information.

**CAUTION: A battery that is stored while functionally depleted, if left in that state for an extended period of time, will naturally lose more power while not being used, which can lead to a state of deep discharge. This state of deep discharge can damage a battery resulting in significantly reduced energy capacity, which can make it difficult to properly recharge, or worse, render it un-serviceable, even with help from a qualified technician.**

To optimize battery storage conditions, it's especially important that they be kept indoors in a temperature and climate-controlled environment whenever possible. Ensure the following conditions are present:

- The battery is separated from the e-bike (if possible). If the battery is integrated in the frame, the whole e-bike should be stored indoors.
- The storage area is protected from the elements, dry, well-ventilated, and has a smoke detector. If you store your battery indoors, do not store it in a bedroom or any place blocking egress from the area.
- The battery is on a clean, dry and flat, non-flammable surface, preferably metal, ceramic or glass.
- The battery and the charge port connectors (terminals or pins) are dry, clean and free of debris.
- The battery and charger have no items covering or placed on top of them.
- The battery is not exposed to flammable materials or an open flame.
- The ambient temperature around the battery and charger is in the charging temperature range specified by the manufacturer.

**CAUTION: During storage, do not expose the battery to heat sources that can result in exceeding the manufacturer's recommended upper temperature limit and result in damage to the battery. For example:**

- **Direct sunlight.**
- **A hot car in the summer.**
- **Proximity to space heaters or other heat sources.**

**⚠ WARNING: Avoid exposing your e-bike to conditions that can result in a short circuit:**

- **If possible, do not store your e-bike outdoors. Exposure to the elements can quickly deteriorate the e-bike and its components.**
- **Do not store your e-bike under a cover as this can trap moisture. Condensation can result in corrosion and damage to the battery terminals or other components.**
- **Unplug the charger from the electrical outlet and the battery before storing the battery. Do not leave a battery connected to the charger after charging or while in storage.**
- **Do not store your e-bike or battery near any strong magnetic sources.**

**A short circuit may lead to a thermal runaway, sudden and severe fire or explosion, resulting in serious personal injury, death or property damage.**

## **C) TRANSPORTING YOUR E-BIKE AND BATTERY**

Lithium-Ion batteries are classified and regulated by transportation authorities as “Dangerous Goods” because of the inherent risk of a fire if they are damaged during transport. Check your local laws for details about shipping and transporting an e-bike battery.

**⚠ WARNING: Do not ship or transport a damaged battery or attempt to circumvent laws regarding shipping of Lithium-Ion batteries. Failure to heed this**

**warning may lead to a fire during the transportation process, resulting in serious personal injury or death to transportation workers or the public, and damage to vehicles or transportation facilities for which you may be held civilly and criminally responsible.**

Pay attention to the additional weight of an e-bike when carrying, transporting, pushing, lifting, maneuvering or parking your e-bike.

**⚠ WARNING: E-bikes can be heavy and awkward to move. Failure to use proper lifting techniques may result in personal injury, or damage to the e-bike if it is dropped.**

### **1. Transporting on a car rack**

Transporting an e-bike inside a vehicle (if there’s space in the vehicle to do so safely) is preferable to transporting on an exterior bike rack.

Depending on the type, an e-bike can be significantly heavier than a regular bicycle. Make sure the vehicle-mounted rack is rated for transporting e-bikes and can accommodate the tire width. Pay particular attention when lifting it onto a vehicle-mounted bike rack. Use proper lifting techniques. Lifting the e-bike may require assistance, especially if the rack is on the roof of a car.

If the e-bike is being transported on a roof rack, be aware that your vehicle’s clearance is affected and the e-bike can come in contact with low-hanging obstacles like garage doors or building entrances. Measure the height of the e-bike on the roof and take note of the clearance measurement.

If the battery and display are easily removable, remove them and place them securely inside the vehicle. This not only keeps your battery safer, it also reduces the weight

of the e-bike, which makes it easier to lift and reduces the load on the bike rack.

Make sure the battery can't roll around and is not exposed to direct sunlight or excessive heat or cold for an extended period of time, and the connectors are protected or covered.

Do not use a rack that places the e-bike upside down during transport. Placing the e-bike upside down can result in damage to the handlebar controls. Regularly check that the e-bike is securely held in place by the rack. An e-bike that comes off the rack while driving can be a significant danger to other drivers. It is not recommended to transport your e-bike on a rack that will result in significant exposure to rain without the use of a rain cover. This can lead to water ingress, which can cause damage to electrical components.

## 2. Transporting on public transit

Familiarize yourself with any relevant rules regarding transporting your e-bike on public transit, such as weight, battery restrictions and tire widths. Some public transit options require that a space is booked; others specify off-peak hours or the need to cover the e-bike.


## 3. Transporting on an airplane

Lithium-Ion batteries are classified as "Dangerous Goods" for transportation purposes and there are significant restrictions and regulations related to transporting a large Lithium-Ion battery by airplane. Check with your airline for any information about transporting a battery on an airplane before traveling. The battery may need to be shipped separately by a shipper who is trained and authorized to ship Dangerous Goods.

## 4. Shipping a battery

Lithium-Ion batteries are classified and regulated by transportation authorities as "Dangerous Goods" because

of the inherent risk of a fire if they are damaged during transport. Check your local laws for details about shipping and transporting an e-bike battery. Many bicycle retailers are trained in the proper methods for shipping e-bikes and batteries. Please consult your local retailer if you need to ship your e-bike.

 **WARNING: Do not ship or transport a damaged battery or attempt to circumvent laws regarding shipping of Lithium-Ion batteries. Failure to follow this warning may lead to a fire during the transportation process, resulting in serious personal injury or death to transportation workers or the public, and damage to vehicles or transportation facilities for which you may be held civilly and criminally responsible.**

## 5. Disposing of your battery (end-of-life)

Lithium-Ion batteries are very efficient at conveniently storing large amounts of energy. However, they do not last forever. Batteries are exhaustible items with a lifespan which is subject to use and conditions. Over time and with each charge and discharge cycle, their capacity to store energy gradually decreases.

Proper use and care can optimize the capacity and extend the life of the battery. Improper care and maintenance can decrease its lifespan and void the warranty. A battery that exhibits signs of significant reduction in runtime has reached the end of its life cycle and should be recycled/replaced. Please refer to the manufacturer's battery specifications for information regarding the number of charge/discharge cycles a battery is expected to provide.

Generally, when a battery's capacity drops below the percentage of capacity specified by your manufacturer, it has reached the end of its useful life cycle and will need to be replaced, as capacity will drop more rapidly after that. If

you notice you're no longer getting the range you expect, contact your authorized retailer to have the battery inspected and replaced if necessary.

If your battery's lifespan is diminished to the point of needing replacement, only replace the battery with an original equipment (OE) e-bike battery from your e-bike manufacturer. Do not attempt to have your original battery "refurbished", or replaced with a reconditioned or an unauthorized/third-party battery.

**⚠ WARNING: Do not dispose of an e-bike battery or any other Lithium-Ion battery in your regular household trash or a public trash receptacle. Batteries that enter the regular waste stream can be damaged, leading to a fire resulting in serious personal injury, death, property damage and environmental contamination.**

Dispose of all batteries and chargers that have reached their end of life in an environmentally conscious manner, in accordance with regulations in effect in your country, state or region.

Please contact your e-bike retailer or manufacturer for additional information about battery and charger disposal and recycling, as well as any recycling programs available to you. For example, in the United States Call2Recycle has partnered with a network of manufacturers and retailers to offer a national battery recycling program.

**EUROPE:** According to EU law, directives 2012/19/EU and 2006/66/EC, all waste electrical and electronic equipment (WEEE) must be collected separately from general waste. Please contact your local e-bike retailer for information on properly disposing of e-bike batteries and chargers.

## 7. SAFELY OPERATING YOUR E-BIKE

**⚠ WARNING: Failure to read, understand and follow all instructions and warnings regarding the safe operation of an e-bike may lead to a crash resulting in serious personal injury or death.**

### A) SAFETY FIRST!

1. Always wear an approved helmet when riding your e-bike, and follow the helmet manufacturer's instructions for fit, use and care.
2. Do you have all the other required and recommended safety equipment? Refer to **Page 30, Section 7: "Safely Operating Your E-bike"**, **subsection K: "Extreme, Stunt or Competition Riding"**.
3. Do you know where you can legally operate your e-Bike? Refer to **Page 10, Section 5: "E-bike Features and Functions"**, **subsection D: "Where Can I Ride My E-bike?"** It's your responsibility to familiarize yourself with the laws of the areas where you ride, and to comply with all applicable laws regarding safe operation of an e-bike.
4. Do you know how to correctly secure your front and rear wheels? Refer to **Page 44, Section 11: "Tech"**, **subsection A: "Wheels"** to make sure. Riding with an improperly secured wheel can cause the wheel to wobble or disengage from the e-bike, and cause serious injury or death.
5. If your e-bike has toeclips and straps or clipless ("step-in") pedals, make sure you know how they work. Refer to **Page 55, Section 11: "Tech"**, **subsection E: "Pedals"**. These pedals require special techniques and skills. Follow the pedal manufacturer's instructions for use, adjustment and care.
6. Do you have "toe overlap"? On smaller-framed e-bikes your foot may be able to contact the front wheel when a

pedal is all the way forward and the wheel is turned. Refer to **Page 55, Section 11: "Tech", subsection E: "Pedals"** to check whether you have toe overlap.

**7.** Does your e-bike have suspension? If so, refer to **Page 56, Section 11: "Tech", subsection F: "Bicycle Suspension"**. Suspension can change the way an e-bike performs. Follow the suspension manufacturer's instructions for use, adjustment and care.

## B) MECHANICAL SAFETY CHECK

**Routinely check the condition of your e-bike before every ride.**

**Nuts, bolts, screws & other fasteners:** Because manufacturers use a wide variety of fastener sizes and shapes made in a variety of materials, often differing by model and component, the correct tightening force or torque cannot be generalized. To make sure that the many fasteners on your e-bike are correctly tightened, refer to the Fastener Torque Specifications in Appendix C of this manual or to the torque specifications in the instructions provided by the manufacturer of the component in question. Correctly tightening a fastener requires a calibrated torque wrench. A professional e-bike mechanic with a torque wrench should torque the fasteners on your e-bike. If you choose to work on your own e-bike, you must use a torque wrench and the correct tightening torque specifications from the e-bike or component manufacturer or from your authorized retailer. If you need to make an adjustment at home or in the field, we urge you to exercise care, and to have the fasteners you worked on checked by your authorized retailer as soon as possible.

**NOTE:** There are some components, for example the drive system, battery and connecting wiring, that require special tools and knowledge, which you should not attempt

to work on yourself. Refer to **Page 40, Section 10: "Fit"** and **Page 44, Section 11: "Tech"** for the items that you may be able to adjust yourself. All other adjustments and repairs should be done by a qualified e-bike mechanic.

**⚠ WARNING: Correct tightening force on fasteners — nuts, bolts and screws — on your e-bike is important. Too little force, and the fastener may not hold securely. Too much force, and the fastener can strip threads, stretch, deform or break. Either way, incorrect tightening force can result in component failure, which can cause you to lose control and fall.**

**Make sure nothing is loose.** Lift the front wheel off the ground by two or three inches, then let it bounce on the ground. Anything sound, feel or look loose? Do a visual and tactile inspection of the whole e-bike. Any loose parts or accessories? If so, secure them. If you're not sure, ask someone with experience to check.

**Tires & Wheels:** Make sure tires are correctly inflated. Check by putting one hand on the saddle, one on the intersection of the handlebars and stem, then bouncing your weight on the e-bike while looking at tire deflection. Compare what you see with how it looks when you know the tires are correctly inflated and adjust if necessary. Refer to **Page 57, Section 11: "Tech", subsection H: "Tires and Tubes"**.

**Tires in good shape?** Spin each wheel slowly and look for cuts in the tread and sidewall. Replace damaged tires before riding the e-bike.

**Wheels true?** Spin each wheel and check for brake clearance and side-to-side wobble. If a wheel wobbles side to side even slightly, or rubs against or hits the brake pads, take the e-bike to an authorized retailer to have the wheel trued.

**⚠ CAUTION: Wheels must be true for the rim brakes to work effectively. Wheel truing is a skill which requires special tools and experience. Do not attempt to true a wheel unless you have the knowledge, experience and tools needed to do the job correctly.**

**Wheel rims clean and undamaged?** Make sure the rims are clean and undamaged at the tire bead and, if you have rim brakes, along the braking surface. Check to make sure that any rim wear indicator marking is not visible at any point on the wheel rim.

**⚠ WARNING: Bicycle wheel rims are subject to wear. Ask your authorized retailer about wheel rim wear. Some wheel rims have a rim wear indicator which becomes visible as the rim's braking surface wears. A visible rim wear indicator on the side of the wheel rim is an indication that the wheel rim has reached its maximum usable life. Riding a wheel that is at the end of its usable life can result in wheel failure, which can cause you to lose control and fall.**

**Brakes:** Check the brakes for proper operation. Squeeze the brake levers. Are the brake quick-releases closed? Are all control cables seated and securely engaged? If you have rim brakes, do the brake pads contact the wheel rim squarely and make full contact with the rim? Do the brakes begin to engage within an inch of brake lever movement? Can you apply full braking force at the levers without having them touch the handlebar? If not, your brakes need adjustment. Refer to **Page 52, Section 11: "Tech", subsection C: "Brakes"**. **Do not ride the bike until the brakes are properly adjusted by a professional bicycle mechanic.**

**Wheel Retention System:** Make sure the front and rear wheels are correctly secured. Refer to **Page 44, Section 11: "Tech", subsection A: "Wheels"**.

**Seat post:** If your seat post has an over-center cam-action fastener for easy height adjustment, check that it is properly adjusted and in the locked position. Refer to **Page 51, Section 11: "Tech", subsection B: "Seat Post Cam-Action Clamp"**.

**Saddle and Handlebar Alignment:** Make sure the saddle and handlebar stem are parallel to the e-bike's center line and clamped tightly enough so that you can't twist them out of alignment. Refer to **Section 10: "Fit", subsection B: "Saddle Position"** on **Page 42** and **subsection C: "Handlebar Height and Angle"** on **Page 43**.

**Handlebar Grips/Plugs:** Make sure the handlebar grips are secure and in good condition, with no cuts, tears or worn-out areas. If not, have your authorized retailer replace them. Make sure the handlebar ends are plugged. If not, have your authorized retailer plug them before you ride.

**⚠ WARNING: Loose or damaged handlebar grips can cause you to lose control and fall. Unplugged handlebars can cut your body, and can cause serious injury in an otherwise minor accident.**

Some handlebars are equipped with grips that lock on with a mechanical connection. They must have adequate space to properly align the grips with the handlebar ends and be properly plugged so no portion of the handlebar end is exposed. Locking grips must be properly tightened to avoid movement.

**⚠ WARNING: Improperly secured locking grips could lead to a loss of control or a crash, resulting in serious injury or death.**

**VERY IMPORTANT SAFETY NOTE: Please also read and become thoroughly familiar with the important information on the lifespan of your e-bike and its components in Appendix B on Page 69.**

## C) BEFORE YOUR FIRST RIDE

When riding an e-bike for the first time, be sure to familiarize yourself with the features and functions of your e-bike by reading all product documentation and reviewing the features with your authorized retailer. It is recommended that you practice accelerating, riding and braking in an area away from people and cars/traffic. Check the handling and response of the e-bike; and check the comfort. If you have any questions, or if you feel anything about the e-bike is not as it should be, consult your authorized retailer before you ride again.


The following questions will help you get to know the functionality and intricacies of operating your e-bike:


**Brakes:** Familiarize yourself with the types of brakes and braking action of your e-bike. Refer to **Page 52, Section 11: "Tech", subsection C: "Brakes"** for more information on brakes and braking. Which lever operates the front brake? In some countries, the left lever operates the front brake, but in other countries it's the opposite. Test the brakes at slow speeds by shifting your weight slightly toward the back while gently applying the brakes, rear brake first. Sudden or excessive application of the front brake could pitch you over the handlebars. Applying brakes too hard can lock up a wheel, which could cause you to lose control and fall. Skidding is an example of what can happen when a wheel locks up.


**Disc brakes:** Disc brakes are very common on most e-bikes, and they provide significantly more stopping power than other types of brakes.


**Disc brake rotors:** Braking performance relies upon a clean rotor. It is not recommended to touch the disc brake rotors, as this can transfer oils from the hands to the braking surface and the brake pads. Only touch the rotor


when it's cool, not moving, and with gloves on

 **WARNING: Applying excessive force too hard or too suddenly to the front brake to slow down or stop can result in loss of control, including causing the rider to pitch over the handlebars, which can result in serious personal injury or death.**

 **WARNING: Properly functioning brakes are essential to the safe operation of your e-bike. If your brakes do not seem to work properly, lose braking power, squeal excessively, or show any signs of damage to the brake levers, cables, housing, calipers, pads or rotors, stop using your e-bike and bring it to your bicycle retailer for inspection and any required repairs. Riding an e-bike with improperly functioning brakes can lead to a crash resulting in serious personal injury or death.**

 **WARNING: Be sure to carefully familiarize yourself with the stopping power of your brakes. If you are new to disc brakes, practice using the front and rear brakes together in a safe place away from traffic until you can safely stop your e-bike in a controlled way. Failure to use disc brakes properly, locking up your wheels or excessive use of the front disc brake can lead to a crash or pitchover, resulting in serious personal injury or death.**

 **WARNING: Disc brakes are equipped with rotors that can generate a lot of heat. Avoid touching any part of the brake system with exposed skin (e.g., hands or legs). Skin contact against a hot brake rotor can result in burns.**

 **WARNING: Disc brakes are equipped with rotors that can be very sharp. Avoid touching the rotors, especially when the wheels are rotating. Contact with a sharp rotor can cause serious injury.**

**Gears:** Which shifter button goes into a harder or easier gear? Practice shifting the gears. Remember to never move the shifter while pedaling backward, nor pedal backwards immediately after having moved the shifter. This could jam the chain and cause serious damage to the e-bike. Refer to **Page 53, section 11: "Tech", subsection D: "Shifting Gears"**.

**Pedals:** If your e-bike has clipless pedals or toeclips, practice getting in and out of the pedals. Refer to **Page 55, Section 11: "Tech", subsection E: "Pedals"**.

**Suspension:** If your e-bike has suspension, familiarize yourself with how the suspension responds to brake application and rider weight shifts. Refer to **Page 56, Section 11: "Tech", subsection F: "Bicycle Suspension"**.

**Display:** What are the features and functions? Which buttons change the power mode?

**Lights:** Does the light turn on when the e-bike is powered on, or is it turned on separately? Make sure the light is always on. The front light beam must be angled properly so it doesn't blind oncoming traffic.


**Power:** Are you familiar with your e-bike's power output? Start getting to know your e-bike in the lower assistance settings, gradually work up to the higher settings. Once comfortable, start riding under normal traffic conditions.

**Walk-assist:** Are you familiar with the function of the power-assist mode? Test the walk-assist function to familiarize yourself with walking next to an e-bike that's moving with low speed.

**Battery:** Can the battery be easily removed from the e-bike? If so, be sure to familiarize yourself with the process to properly and safely remove and install the battery.

**Starting a ride:** Do you know how to safely start a ride

on an e-bike? Develop a proper habit for starting your ride. Make sure the power is off and you're properly seated on the saddle, with hands on the handlebar and one or more brakes engaged before putting a foot on a pedal.

 **WARNING: Do not put a foot on a pedal and swing a leg over the e-bike. This is especially important if the power is on. While this technique may work fine on a regular bicycle, this is potentially dangerous to do on an e-bike, as it can cause the e-bike to unexpectedly launch once pressure is applied to a pedal, leading to a crash resulting in serious personal injury.**

## D) BEFORE EVERY RIDE

Before every ride, you need to make sure your e-bike is in proper working order. Here are some questions to ask yourself before every ride:

- Are all battery and terminal connections (control unit, command console, drive unit) plugged properly?
- Is the battery fully charged? Charge it after each ride. Don't wait until it's fully discharged. A battery in a state of deep discharge can negatively affect the ability to charge it, and can also reduce its charge capacity.
- Is the display functioning properly? Any error messages? Don't ride if it's showing errors or improper information.
- Is the battery tightly installed and securely locked (if it has a lock)?
- Is your light turned on, functioning and angled properly? If a bulb is dead, only replace it with a compatible light bulb.
- Are the tires in good condition and properly inflated?

If you have questions about the proper tire pressure for your e-bike, check the inflation range printed on the tire sidewall, or talk to your e-bike retailer. Refer to **Page 57, Section 11: "Tech", subsection H: "Tires and Tubes"** for

additional information about tire inflation.

- Are the brakes working properly? Squeeze both brake levers firmly to make sure the brakes are working and able to slow and stop the e-bike.

**NOTE:** Some brake systems have a cutoff switch to stop the motor when the brakes are applied. Check your model-specific e-bike manual to determine if your e-bike has this feature. If so, check the function of the cutoff switch before each ride.

## E) GENERAL E-BIKE SAFETY

**⚠ WARNING: Failure to read, understand and follow all instructions and warnings regarding the safe operation of an e-bike may lead to a crash resulting in serious personal injury or death, experience and tools needed to do the job correctly.**

The addition of an integrated drive system means in some ways your e-bike is like a regular bicycle, but in other ways it's different and unique. The higher the class and top speed, the more important these safety notices become. These differences mean you must read and follow all instructions in this Manual and any manufacturer product documentation. You should not treat your e-bike the same as a regular bicycle. The content in this Manual related to rider safety applies to all e-bikes, regardless of type or class:

### Factors to pay attention to when riding an e-bike:

**Power:** The added power and weight of the drive system means an e-bike may be faster and heavier than a regular bicycle. This additional acceleration, speed and weight can dramatically affect the handling, cornering and braking of your e-bike. The faster you go and the more weight you carry (including passengers or cargo), the more you have to exercise caution when navigating around traffic

and other people, slowing down (preparing for greater stopping distances), and cornering (slowing down well before entering the corner).

**Cargo weight:** When transporting cargo or passengers, pay particular attention to the handling and braking characteristics when riding the e-bike with the additional load. Carrying additional weight can alter the center of gravity of the e-bike, which can negatively affect the rate of acceleration, braking distances and safe cornering. There is an increased risk of a crash resulting in the rider or passenger going over the bars or falling off the e-bike.

**⚠ WARNING: Failure to take into account the additional weight and speed of an e-bike and its cargo can lead to a crash resulting in serious personal injury or death.**

**Helmet use [fig. 5]:** Always wear a properly fitted helmet that is certified as meeting safety regulations when riding your e-bike. Some manufacturers may offer helmets that are specifically designed for use with e-bikes.




fig. 5

**⚠ WARNING: Wearing a helmet has been shown to reduce the frequency and severity of injury should there be a crash. Failure to wear a helmet may increase the risk of serious personal injury or death.**

**Display(s):** If your e-bike has a display on the handlebar or frame, avoid paying excessive attention to it. Spending extended periods of time looking at your display can be distracting and can result in a crash. It's intended only for occasional glances. Be sure to keep your attention on the road ahead.

**Children and pets:** When riding an e-bike in proximity of

children or animals, always be aware of their location and exercise caution to reduce the risk of injury.

**Hot surfaces:** Certain components on an e-bike can be hot to the touch during or immediately after a ride.

**⚠ WARNING: Components can reach very high temperatures during use, especially when the e-bike is subjected to high loads at low speeds, resulting in poor air movement around the e-bike. For example, riding up a long, sustained hill, riding with a heavy load, or riding down a long hill with prolonged brake application, can result in one or more systems generating significant heat. Avoid touching any part of the battery housing, drive system or brake system with exposed skin (e.g., hands or legs). Contact with hot components can result in burns if touched.**

**Sun exposure:** Do not park for extended periods in the blazing sun. Prolonged exposure to excessive heat and UV rays from the sun can result in damage to the battery and other components. It can also cause paint to fade, and rubber or plastic parts to dry out, become brittle and crack.

**Component temperature:** There are numerous circumstances that can affect component temperatures. The more you pay attention to the circumstances and try to mitigate the effects, the lower the temperatures may be. The examples below describe circumstances that generally require more effort from components like the motor, battery and brakes, which can cause them to generate more heat.

- High ambient temperature.
- Hilly terrain (elevation gain).
- Long distance of ride.
- Low level of assistance.
- High rider energy output.

- High combined weight of e-bike, rider and cargo.
- Inefficient gear selections.
- Sustained application of brakes.

**⚠ WARNING: An e-bike may apply greater loads to your tires during use than a regular bicycle. If you replace the tires on your e-bike, it is strongly recommended to only use tires intended for e-bikes. Worn or incorrect tires can result in loss of control when cornering or braking which can cause a crash resulting in serious personal injury or death.**

**⚠ WARNING: Keep medical devices/implants (e.g., a pacemaker), or sensitive electronic devices that retain electronic/digital data away from any magnets or sensors located on your e-bike, which may interfere with the function of these devices.**

## F) LIGHTING AND NIGHT RIDING

Riding an e-bike at night is much more dangerous than riding during the day. A bicyclist is very difficult for motorists and pedestrians to see. Therefore, children should never ride at dawn, at dusk or at night. Adults who choose to accept the greatly increased risk of riding at dawn, at dusk or at night need to take extra care both riding and choosing specialized equipment that helps reduce that risk. Consult your authorized retailer about night riding safety equipment.

Having a headlight on while riding increases your visibility, even in the daytime. Many e-bikes are equipped with a headlight that is connected to and powered by the drive system, when the battery is charged and the system is turned on. If your e-bike is equipped with a headlight, it is recommended to always have it on while riding. If your headlight does not turn on automatically when the drive

system is turned on, turn on the headlight.

**NOTE:** Light systems connected to the drive system won't work if the battery is removed or fully discharged. In some countries, if the e-bike is ridden without lights, it won't be in compliance with traffic laws.

**⚠ WARNING:** Using a headlight and taillight is highly recommended. Riding an e-bike at night or in low light or visibility conditions without a functioning headlight and taillight can create an increased risk of impact with obstacles, unseen road conditions, pedestrians, animals or other road users, including motor vehicles, leading to a crash resulting in serious personal injury or death.

**⚠ WARNING:** Reflectors are not a substitute for required lights. Riding at dawn, at dusk, at night or at other times of poor visibility without an adequate bicycle lighting system and without reflectors is dangerous and may result in serious injury or death.

Bicycle reflectors are designed to pick up and reflect car lights and street lights in a way that may help you to be seen and recognized as a moving bicyclist.

**CAUTION:** Check reflectors and their mounting brackets regularly to make sure that they are clean, straight, unbroken and securely mounted. Have your authorized retailer replace damaged reflectors and straighten or tighten any that are bent or loose.

The mounting brackets of front and rear reflectors are often designed as brake straddle cable safety catches which prevent the straddle cable from catching on the tire tread if the cable jumps out of its yoke or breaks.

**⚠ WARNING:** Do not remove the front or rear reflectors or reflector brackets from your e-bike. They

are an integral part of the e-bike's safety system. Removing the reflectors reduces your visibility to others using the roadway. Being struck by other vehicles may result in serious injury or death.

**⚠ WARNING:** The reflector brackets may protect you from a brake straddle cable catching on the tire in the event of brake cable failure. If a brake straddle cable catches on the tire, it can cause the wheel to stop suddenly, causing you to lose control and fall.

If you choose to ride under conditions of poor visibility, check and be sure you comply with all local laws about night riding, and take the following strongly recommended additional precautions:

- Purchase and install battery- or generator-powered head and tail lights which meet all regulatory requirements for where you live and provide adequate visibility.
- Wear light-colored, reflective clothing and accessories, such as a reflective vest, reflective arm and leg bands, reflective stripes on your helmet, flashing lights attached to your body and/or your e-bike. Any reflective device or light source that moves will help you get the attention of approaching motorists, pedestrians and other traffic.
- Make sure your clothing or anything you may be carrying on the e-bike does not obstruct a reflector or light.
- Make sure that your e-bike is equipped with correctly positioned and securely mounted reflectors.

While riding at dawn, at dusk or at night:

- Ride slowly.
- Avoid dark areas and areas of heavy or fast-moving traffic.
- Avoid road hazards.
- If possible, ride on familiar routes.

If riding in traffic:

- Be predictable. Ride so that drivers can see you and predict your movements.
- Be alert. Ride defensively and expect the unexpected.
- If you plan to ride in traffic often, ask your authorized retailer about traffic safety classes or a good book on bicycle traffic safety.

## G) GENERAL BICYCLE SAFETY

**1.** All of the same safe riding practices that apply to unpowered bicycles also apply to e-bikes, with the important difference being the addition of motor power that can propel you and your e-bike at greater speeds and allow you to accelerate more quickly. This makes your adherence to these general rules of safety that much more important.

**2.** Always do the **Mechanical Safety Check**. Refer to **Page 21, Section 7: "Safely Operating Your E-bike", subsection B: "Mechanical Safety Check"** before you get on an e-bike.

**3.** Be thoroughly familiar with the controls of your e-bike. Refer to **Section 11: "Tech", subsections C: "Brakes" on Page 52, D: "Shifting Gears" on Page 53 and E: "Pedals" on Page 55.**

**4.** Be careful to keep body parts and other objects away from the sharp teeth of chainrings; the moving chain; the turning pedals and cranks; and the spinning wheels of your e-bike.

**5.** Always wear:

- Shoes that will stay on your feet and will grip the pedals. Make sure that shoelaces cannot get into moving parts, and never ride barefoot or while wearing sandals.

- Bright, visible clothing that is not so loose that it can be tangled in the e-bike or snagged by objects at the side of the road or trail.
- Protective eyewear, to protect against airborne dirt, dust and bugs — tinted when the sun is bright, clear when it's not.

**6.** Unless your e-bike was specifically designed for jumping [see *Appendix A, Intended Use*] don't jump with your e-bike. Jumping an e-bike, particularly a mountain e-bike, can be fun; but it can put huge and unpredictable stress on the e-bike and its components. Riders who insist on jumping their e-bikes risk serious damage, to their e-bikes as well as to themselves. Before you attempt to jump, do stunt riding or race with your e-bike, read and understand understand **Page 30, Section 7: "Safely Operating Your E-bike", subsection K: "Extreme, Stunt or Competition Riding"**.

**7.** Ride at a speed appropriate for conditions. Higher speed means higher risk.

## H) RIDING SAFETY

**1.** Obey all rules of the road and all local traffic laws.

**2.** You are sharing the road or the path with others — motorists, pedestrians and other cyclists. Respect their rights.

**3.** Ride defensively. Always assume that others do not see you.

**4.** Look ahead, and be ready to avoid:

- Vehicles slowing or turning, entering the road or your lane ahead of you, or coming up behind you.
- Parked car doors opening.
- Pedestrians stepping out.
- Children or pets playing near the road.
- Potholes, sewer grating, railroad tracks, expansion joints, road or sidewalk construction, debris and other obstructions

that could cause you to swerve into traffic, catch your wheel or otherwise cause you to lose control and have an accident.

- The many other hazards and distractions which can occur on a e-bike ride.
5. Ride in designated bike lanes, on designated bike paths or as close to the edge of the road as possible, in the direction of traffic flow or as directed by local governing laws.
  6. Stop at stop signs and traffic lights; slow down and look both ways at street intersections. Remember that an e-bike always loses in a collision with a motor vehicle, so be prepared to yield even if you have the right of way.
  7. Use approved hand signals for turning and stopping.
  8. Never ride with headphones or earbuds. They mask traffic sounds and emergency vehicle sirens, distract you from concentrating on what's going on around you, and their wires can tangle in the moving parts of the e-bike, causing you to lose control.
  9. Never carry a passenger, unless the e-bike was designed to carry a passenger. Before installing a child carrier or trailer, check with your authorized retailer or the e-bike manufacturer to make sure the e-bike is designed for it. If the e-bike is suitable for a child carrier or trailer, make sure that the carrier or trailer is correctly mounted and the child is secured and wearing an approved helmet. Refer to **Page 34, Section 8: "Best Practices for Riding and Carrying Passengers and Cargo"** for more information on carrying passengers, child carriers and trailers.
  10. Never carry anything that obstructs your vision or your complete control of the e-bike, or anything that could become entangled in the moving parts of the e-bike.
  11. Never hitch a ride on to another vehicle.
  12. Don't do stunts, wheelies or jumps. If you intend

to do stunts, wheelies, jumps or go racing with your e-bike despite advice to the contrary, refer to **Page 30, Section 7: "Safely Operating Your E-bike", subsection K: "Extreme, Stunt or Competition Riding"**, now. Think carefully about your skills before deciding to take the large risks that go with this kind of riding.

13. Don't weave through traffic or make any moves that may surprise people with whom you are sharing the road.
14. Observe and yield the right of way.
15. Never ride your e-bike while under the influence of alcohol or drugs.
16. If possible, avoid riding in bad weather, when visibility is obscured, at dawn, at dusk or in the dark, or when extremely tired. Each of these conditions increases the risk of accident.

## I) OFF-ROAD SAFETY

We recommend that children not ride on rough terrain unless they are accompanied by an adult. Some e-bikes may be designed for off-road use. If your e-bike is designed for off-road use and you choose to ride your e-bike off-road, follow these best practices.

1. The variable conditions and hazards of off-road riding require close attention and specific skills. Start slowly on easier terrain and build up your skills. If your e-bike has suspension, the increased speed you may develop also increases your risk of losing control and falling. Get to know how to handle your e-bike safely before trying increased speed or more difficult terrain.
2. Wear safety gear appropriate to the kind of riding you plan to do.
3. Don't ride alone in remote areas. Even when riding

with others, make sure that someone knows where you're going and when you expect to be back.

**4.** Always take along some kind of identification, so that people know who you are in case of an accident; and take along some cash for food, a cool drink, cell phone and possibly an emergency locator gps beacon if going into remote territory without cell service.

**5.** Yield right of way to pedestrians and animals. Ride in a way that does not frighten or endanger them, and give them enough room so that their unexpected moves don't endanger you.

**6.** Be prepared. If something goes wrong while you're riding off-road, help may not be close. In addition to food/clothing/means of communication, take a handheld bicycle pump, inner tube, tire lever, and multi-tool. Bigger or extended trips may necessitate additional spare or backup parts.

**7.** Before you attempt to jump, do stunt riding or race with your e-bike, read and understand **Page 30, Section 7: "Safely Operating Your E-bike", subsection K: "Extreme, Stunt or Competition Riding"**.

**Off-Road Respect:** Obey the local laws regulating where and how you can ride off-road, and respect private property. You may be sharing the trail with others — hikers, trail runners, equestrians, other cyclists. Respect their rights. Stay on the designated trail. Don't contribute to erosion by riding in mud or with unnecessary sliding. Don't disturb the ecosystem by cutting your own trail or shortcut through vegetation or streams. It is your responsibility to minimize your impact on the environment. Leave things as you found them; and always take out everything you brought in.

## J) WET-WEATHER RIDING



**WARNING: Wet weather impairs traction, braking**

**and visibility, both for the bicyclist and for other vehicles sharing the road. The risk of an accident is dramatically increased in wet conditions.**

Under wet conditions, the stopping power of your brakes (as well as the brakes of other vehicles sharing the road) is dramatically reduced and your tires don't grip nearly as well. This makes it harder to control speed and easier to lose control. To make sure that you can slow down and stop safely in wet conditions, ride more slowly and apply your brakes earlier and more gradually than you would under normal, dry conditions.

## K) EXTREME, STUNT OR COMPETITION RIDING

Whether you call it *Aggro*, *Hucking*, *Freeride*, *North Shore*, *Downhill*, *Jumping*, *Stunt Riding*, *Racing*, *Enduro* or something else: if you engage in this sort of extreme, aggressive riding you may get hurt, and you voluntarily assume an increased risk of injury or death.

Not all e-bikes are designed for these types of riding, and those that are may not be suitable for all types of aggressive riding. Check with your Kona authorized retailer about the suitability of your e-bike before engaging in extreme riding.

When riding fast down hill, you can reach speeds achieved by motorcycles, and therefore face similar hazards and risks. Have your e-bike and equipment carefully inspected by a qualified mechanic and be sure it is in perfect condition. Consult with expert riders, area site personnel and race officials on conditions and equipment advisable at the site where you plan to ride. Wear appropriate safety gear, including an approved full-face helmet, full-finger gloves, and body armor. Ultimately, it is your responsibility to have proper equipment and to be familiar with course conditions.

**⚠ WARNING: Although many catalogs, advertisements and articles about bicycling depict riders engaged in extreme riding, this activity is extremely dangerous, increases your risk of injury or death, and increases the severity of any injury. Remember that the action depicted is being performed by professionals with many years of training and experience. Know your limits and always wear a helmet and other appropriate safety gear. Even with state-of-the-art protective safety gear, you could be seriously injured or killed when jumping, stunt riding, riding downhill at speed or in competition.**

**⚠ WARNING: E-bikes and bicycle parts have limitations with regard to strength and integrity, and this type of riding can exceed those limitations or dramatically reduce the length of their safe use.**

We recommend against this type of riding because of the increased risks; but if you choose to take the risk, at least:

- Take lessons from a competent instructor first.
- Start with easy learning exercises and slowly develop your skills before trying more difficult or dangerous riding.
- Use only designated areas for stunts, jumping, racing or fast downhill riding.
- Wear a full-face helmet, safety pads and other safety gear.
- Understand and recognize that the stresses imposed on your e-bike by this kind of activity may break or damage parts of the e-bike and void the warranty.
- Take your e-bike to your authorized retailer if anything breaks or bends. Do not ride your e-bike when any part is damaged.
- If you ride downhill at speed, do stunt riding or ride in competition, know the limits of your skill and experience. Ultimately, avoiding injury is your responsibility.

## L) CHANGING COMPONENTS OR ADDING ACCESSORIES

There are many components and accessories available to enhance the comfort, performance and appearance of your e-bike. However, if you change components or add accessories, you do so at your own risk. The e-bike's manufacturer may not have tested that component or accessory for compatibility, reliability or safety on your e-bike. Before installing any component or accessory, including but not limited to a different size tire, a lighting system, a luggage rack, a child seat or a trailer, make sure that it is compatible with your e-bike by checking with your authorized retailer. Be sure to read, understand and follow the instructions that accompany the products you purchase for your e-bike. See also Appendix A, **Page 67** and B, **Page 69**.

**⚠ WARNING: Failure to confirm compatibility, properly install, operate and maintain any component or accessory can result in serious injury or death.**

**⚠ WARNING: Exposed springs on the saddle of any e-bike fitted with a child seat can cause serious injury to the child.**

**⚠ WARNING: Changing the components on your e-bike with other than genuine replacement parts may compromise the safety of your e-bike and may void the warranty. Check with your authorized retailer before changing the components on your e-bike.**

**⚠ WARNING: Any accessory or component attached to, on or near a rotating wheel poses a risk of contacting or stopping the wheel, leading to a crash resulting in serious injury or death. Before every ride check to ensure that all such accessories and components, and the fasteners used to attach them, are securely mounted to your e-bike.**

**⚠ WARNING:** Any object that unexpectedly and abruptly stops the rotation of the front wheel can cause the e-bike and rider to pitch forward [fig. 6], which can result in serious injury or death.

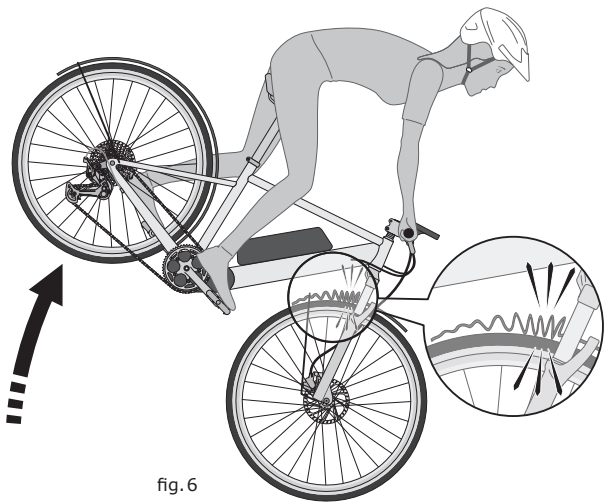


fig. 6

**⚠ WARNING:** If your bicycle's controls are impaired or compromised due to the use of incompatible accessories or components, the bicycle may stop unexpectedly, or you may lose control of your bicycle and crash, resulting in serious injury or death.

## M) WALK-ASSIST MODE

Some e-bikes are equipped with a walk-assist mode to help you move the e-bike around without riding it. Proper use of walk-assist mode is important to prevent loss of control and injury.

- Only use when dismounted.
- Keep both hands on the grips and fingers on one or both brake levers so the motor power can be stopped immediately if necessary.
- Keep clear of the pedals while walking the e-bike.

**⚠ WARNING!** Make sure the e-bike system is turned off so that the walk-assist mode cannot be accidentally activated when:

- Pushing the e-bike without the walk-assist mode turned on.
- Transporting the e-bike (lifting onto a car, bike rack or a train).
- Carrying the e-bike up and down stairs.
- Performing any maintenance or service (e.g., placing the chain on a chainring) or other drivetrain parts, pedals or fixing a flat tire.

## N) GETTING THE MOST OUT OF YOUR E-BIKE

The variety of factors that affect your e-bike's range makes it impossible to accurately estimate the range before a ride. Pay attention to the variables to maximize your range and adjust any factors during the ride as needed (e.g., lower assistance level, optimal gear shifting or lower speeds) to help you reach your destination.

To maximize battery range, turn off the drive system when not in use. Most drive systems have a sleep mode to conserve energy, which will turn off if the e-bike has not

been active for a predetermined amount of time.

Your e-bike's range varies based on a number of factors:

**The level of motor assistance (power mode):** More power assistance from the motor will make riding easier but will use more battery power.

**How much power you apply to the pedals:** The more power the rider provides, the less the motor has to work.

**How fast you ride:** The faster you ride, the more power the motor generates, the more energy is required from the battery.

**Riding habits:** The more efficiently you ride, the greater the range will be. For example, regular starts and stops will reduce your range.

**Gear choices:** The higher the gear, the more power is required from the motor. Choosing the best gear for the terrain can improve your range.

**Tire type and air pressure:** Tires with aggressive tread or lower than recommended pressure can increase your rolling resistance and reduce your range.

**Number of battery charge/discharge cycles:** Regular charging and discharging reduces the battery's capacity, which will reduce your range.

**Terrain features:** Hilly terrain will reduce your range more than flat terrain.

**Wind and temperature conditions:** A strong headwind or colder temperatures can reduce the efficiency of your e-bike and reduce your range.

**Total combined weight (e-bike, rider and cargo):** Carrying heavier cargo makes the motor work harder, which can reduce your range.

**Condition of e-bike components:** Certain components like wheel bearings, if not functioning smoothly, can increase rolling resistance, which can reduce your range.

To get the most range:

- Fully charge the battery before each ride.
- Use lower assistance modes.
- Ride more slowly and efficiently.
- Choose the right gear for the terrain and accelerate gently.
- Check tire pressure regularly and set the pressure as recommended by the manufacturer.
- Make sure your e-bike is in proper working order and serviced regularly, the wheels spin freely and brake discs clear the brake pads.
- Carry the least amount of weight necessary.

Choose your gears according to the speed and incline you're riding. Shift gears regularly to keep a consistent, comfortable pedaling speed, or cadence. Riding in a high gear with a low cadence increases the demand on the motor and battery, which can reduce your range. Choosing a lower gear with a higher cadence also puts less strain on the drivetrain, which can increase the longevity of the drivetrain.

Maintain a steady pace and anticipate changes to your surroundings whenever possible. Any unnecessary deceleration requires more energy to accelerate back up to speed, which reduces your available range.


Before coming to a stop, shift gears into an easier gear. This will make accelerating from a stop easier, and require less energy from the battery to get back up to speed.

When riding uphill, keep to a reasonable pace and choose a lower gear with a higher cadence. This puts less strain on the motor, which can help increase the available range.

**CAUTION (e-bikes equipped with throttle): Riding uphill at slow speed using only the throttle can result in overheating of the drivetrain components due to excessive strain. This can result in component failure, as well as subject the battery to excessive stress, which can reduce its capacity.**

Center-mounted or “mid-drive” motors (motor that applies power to the cranks) share many of the same drivetrain components as a regular bicycle. However, the increase in force applied at the crank from the motor can result in more strain to the drivetrain components (chain, derailleur, cassette, chainrings and derailleur hanger). In order to minimize the strain and maximize the lifespan of the drivetrain, apply best practices when shifting:


- Shift efficiently by anticipating when the shift will be needed beforehand. For example, shifting into an easier gear before starting to climb a hill instead of during the climb.
- Ride with a cadence that matches the terrain and speed, so you’re not pedaling too slowly and with too much force.
- When shifting, reduce your pedal force or throttle, shift the gears, then gently re-engage your pedal force once the shift is complete.

** WARNING: Shifting under a heavy load can cause damage to the drivetrain components, including breaking the chain. This can cause a crash, resulting in serious personal injury or death.**

Keep your e-bike clean, well-maintained and functioning optimally. Check tire pressure regularly. The better your e-bike is maintained, the more efficiently it will operate.

Familiarize yourself with your manufacturer’s specific startup recommendations. Before doing more extensive, longer and more demanding rides, become familiar with

your e-bike’s functions, features and operation so you can adapt your riding style to changing conditions.

** WARNING: Conditions on the road, path or trail you are riding on can present sudden hazards. Avoid or exercise caution by slowing your speed on dangerous terrain, including:**

- Potholes
- Train tracks
- Wet, oily or icy terrain
- Gravel or sand
- Curbs
- Wet leaves
- Speed bumps
- Drain grates
- Broken glass
- Thorns
- Steep hills
- Sharp or sudden turns
- Other hazards that can cause a puncture and/or loss of control

Failure to take these potentially dangerous conditions into account can cause a crash, leading to serious personal injury or death.

## 8. BEST PRACTICES FOR RIDING AND CARRYING PASSENGERS AND CARGO

When riding your e-bike, you are usually sharing the roadway, path or trail with other users. This presents certain risks to yourself and others.

**⚠ WARNING: Riding your e-bike on public roads shared with motor vehicles presents an obvious and assumed risk of collision. Most serious injuries and fatalities related to e-bike use are the result of collisions with larger, faster motor vehicles. When on an e-bike, remember that you do not have the protection enjoyed by motorists, such as seat belts, airbags and the surrounding structure of a motor vehicle. As a road user, it is your responsibility to follow the rules of the road and operate your e-bike in such a manner as to reduce your risk of a collision. Failure to follow this warning may lead to a collision or crash, resulting in serious personal injury or death.**

Please be considerate of others around you, whether they are motorists, pedestrians or cyclists. Please pay attention to the following factors:

**Your speed:** Always ride at a speed within your comfort zone and/or according to the conditions you're riding in (e.g., rain, darkness or loose dirt). This especially applies when riding in wet weather, as you'll need even more time and greater distance to slow down and are more likely to crash. Give lots of room to slow down and apply brakes gently. Riding at speeds beyond your comfort or skill level can result in a serious crash. Even if it's legal, it's not always safe to be riding at high speeds on paths or trails when other users are present.

**Surrounding speeds:** Consider the speeds of those around you and how your speed is perceived. E-bike speeds are often underestimated since they look like regular bicycles and decisions are made with the assumption you're riding slower than you are. Always be vigilant about what's going on around you at intersections or anyplace where cars might cross your path.

**Surrounding people:** Exercise caution when passing pedestrians or other cyclists. The greater the speed difference, the greater the likelihood of a crash. Slow when people or pedestrians are present, as they may not be aware of your presence and may step out in front of you. Riding with greater speed and weight requires more care, especially around other riders. Avoid distractions and stay focused on the road ahead. When following other riders, maintain a sufficient enough gap to allow you to stop safely. The higher your speed, the greater the gap should be.

**⚠ CAUTION: When riding in a group, following other riders, or riding on crowded roads, paths or trails, always maintain a gap sufficient to allow you to stop safely.**

**Applying brakes:** Always be prepared to squeeze the brake levers. Your brakes are designed to take into account the weight of the e-bike, rider and cargo to stop your e-bike. If you apply them in a controlled manner, your e-bike will slow down and come to a stop.

**Brake power:** Don't exclusively apply the front brake to slow down. This can put undue stress on components and can put too much weight on the front of the e-bike. Instead, to slow the e-bike down safely, gently engage the rear brake, followed by the front brake. The amount of force applied to each brake varies depending on the terrain, weather conditions, speed, rider/cargo weight and trajectory.

**⚠ WARNING: Applying excessive force to the front brake to slow down can result in loss of control, including causing the rider to pitch over the handlebars, which can result in serious personal injury or death.**

## A) RIDING WITH PASSENGERS

Check with your authorized retailer or e-bike manufacturer for information about transporting passengers with your

e-bike. Many e-bikes are designed for use by one person (the rider) unless explicitly stated by the manufacturer. Any transportation of a passenger beyond the intended design of the e-bike is at your own risk. Certain passenger and cargo e-bikes have requirements for how passengers are placed on the e-bike. Follow any rules and restrictions specified by the e-bike manufacturer.

Before transporting passengers, including children (see “Transporting Youth and Children” below), inform yourself of all applicable laws, requirements and restrictions (including age restrictions) for your particular country or region. Some regions do not allow riding with passengers.

When carrying a passenger behind the rider, since they cannot see what’s coming, ride with more caution, anticipate whenever possible what’s coming sooner than usual, and always notify the passenger of an upcoming sudden acceleration, deceleration, turn, bump or obstacle that could impact their safety as a passenger, so they can brace for the event.

**Remember:** It is the rider’s responsibility to ensure the safe operation of the e-bike and the safety of their passenger. Whenever possible, plan your route to avoid riding significant hills while carrying passengers.

**⚠ WARNING: Riding with passengers on an e-bike significantly affects the balance, handling, acceleration and braking distance of an e-bike, especially on a significant downhill grade. Additional weight and speed means additional forward momentum that will need to be counteracted by your brakes in order to slow your e-bike or bring it to a stop. Because braking demands increase with additional weight when going downhill, there is a greater need to control your speed at the beginning and during the descent. Riding at speeds that are too high to safely manage can lead to a loss of control or crash,**

**resulting in serious personal injury or death.**

**Weight limits:** E-bikes often have maximum stated structural weight limits for rider, passenger and any cargo. Pay particular attention to the structural weight limits specified by your e-bike manufacturer, and do not exceed them. If you are unsure about the weight limit for your e-bike, ask your e-bike retailer or the manufacturer. Even if the rider, passenger and cargo weight are within the structural weight limits, the rider must also determine if they’re comfortably and safely able to manage the weight of a passenger.

**⚠ WARNING: Do not exceed the maximum structural weight limit of your e-bike. Exceeding the limit can affect the structural integrity of the e-bike leading to a failure of the e-bike’s frame, fork or components, and can also result in unsafe increases in braking distances. Any of these conditions can lead to a crash resulting in serious personal injury or death.**

To protect passengers, always make sure to prevent loose clothing or personal belongings such as purses or backpacks from interfering with moving parts while your e-bike is in motion.

**⚠ WARNING: Any contact from body parts, clothing or cargo with the e-bike while in motion can unexpectedly and abruptly stop the e-bike, leading to a crash resulting in serious personal injury or death.**

**⚠ CAUTION: Make sure the e-bike is secured and stable when loading or unloading passengers. The e-bike can tip over when passengers are being loaded or unloaded, which can result in injury.**

Your e-bike may be equipped with a kickstand. The kickstand is designed to support only the e-bike without rider,

cargo or passengers, while on a stable, flat surface. Do not rely on the kickstand to support the e-bike during the loading or unloading process.

Passengers should not get on the e-bike unless the rider is holding the e-bike. Never allow a child to climb onto the e-bike by themselves, unless an adult is making sure the e-bike is steady.

Some e-bikes may have a seating area, handholds and/or foot supports for the passenger. Passengers should be seated and handholds and foot supports should be used at all times when the e-bike is in motion.

**⚠ WARNING: Passengers must not stand on foot supports while the e-bike is in motion. Standing on the foot supports negatively affects the center of gravity of the e-bike and can cause instability leading to a crash, which can result in serious personal injury or death.**

**Carrying Pets:** Due to the unpredictable nature of pets, it is not recommended to ride with a pet as a passenger or live cargo. Pets should always be transported in a closed pet carrier or in a trailer designed for that purpose. Transporting a pet that is not restrained or confined puts the rider and pet at significant risk of injury, and you do so at your own risk.

## B) TRANSPORTING YOUTH OR CHILDREN

**⚠ WARNING: Riding with youth or children as passengers on an e-bike carries significant risks. Parents must exercise caution and good judgment, and know they assume all risks when transporting a child.**

**⚠ WARNING: Children must always wear an approved helmet when passengers on e-bikes.**

Age restrictions vary depending on the country or region. Before riding with a child as a passenger, familiarize yourself with and obey all applicable laws, requirements and restrictions for your country or region.

**Using a child carrier:** Only use child carriers that are approved by the manufacturer for use with your e-bike and that conform to local laws. Refer to the e-bike manufacturer for any additional information about child carriers specific to your e-bike.

**⚠ WARNING: Always follow the installation, safety and compatibility instructions provided by the manufacturer of the child carrier. Ensure the child carrier is properly installed as instructed, with sufficient clearance for the child's heels and safety for fingers, and that the child is within the weight range specified by the manufacturer. Always install foot restraints or guards designed to prevent body parts becoming caught in a revolving wheel. Failure to follow these warnings and all instructions provided by the manufacturer can cause serious injury to the child or a crash, which can result in serious personal injury or death.**

**⚠ WARNING: Do not leave a child unattended in a child carrier, and do not rely on a kickstand to hold an e-bike up safely, except when buckling the child in the child carrier. Always hold the e-bike safely and securely when a child is in the child carrier, and remove the child before leaving the e-bike. An unattended child can wriggle unexpectedly and cause the e-bike to fall over, which can result in serious personal injury or death.**

Check on your child regularly. If they fall asleep, it can put excessive strain on their neck. A child should only be placed in a child seat if they're able to hold their head up independently, as well as withstand the movements and bouncing that come with riding on an e-bike.

**⚠ WARNING:** Improper mounting of a child carrier, trailer or accessory may result in failure of the frame, fork or components, causing serious personal injury or death.

## C) TRANSPORTING CARGO

**⚠ WARNING:** Cargo should only be carried on an e-bike that is designed for that purpose. Carrying cargo on an e-bike that is not designed for that purpose may lead to loss of control or crash, which can result in serious personal injury or death.

Always load cargo as low as possible to help maintain a low center of gravity. This helps improve the stability of the e-bike.

When riding with cargo, practice and familiarize yourself with the braking distances and handling characteristics of the e-bike by starting with lighter loads and gradually increasing the weight. Carrying increased weight will increase your braking distance, which requires more careful use of your brakes. To help maintain control, start by applying the rear brake first, then gently apply the front brake. Gradually increase the braking force as needed to safely slow the e-bike in a controlled manner.

**⚠ WARNING:** Cargo must be properly secured to the e-bike with no loose straps and checked periodically to ensure the cargo remains secure. Loose cargo can shift or fall off the e-bike and can interfere with moving parts. Loose straps can also interfere with moving parts. Either of these situations can cause a crash, resulting in serious personal injury or death.

**⚠ WARNING:** Always make sure the e-bike is stable and secure before loading or unloading any cargo, and

the cargo is loaded to minimize any interference with obstacles, other cyclists, pedestrians or motorists. Always be aware of your surroundings. Cargo that interferes with your surroundings can cause a crash, which can result in serious personal injury or death.

### 1. Cargo E-bikes

**⚠ WARNING:** All of the above instructions and warnings about carrying passengers and cargo apply to cargo e-bikes. Failure to follow these warnings could result in a crash leading to serious personal injury or death.

Cargo e-bikes are e-bikes designed specifically to carry cargo and/or passengers. The handling characteristics of cargo e-bikes can be very different from a regular e-bike. As cargo e-bikes typically handle much slower, additional practice is often required to get used to the handling. Ride more defensively, give more room for turning, anticipate needing more distance to slow down, especially when carrying cargo. Practice parking the cargo e-bike as well. Do not ride with cargo that isn't properly secured.

## D) USING A TRAILER

If use of a trailer, carrier or other passenger accessory is allowed with your e-bike, make sure the trailer is compatible with your e-bike. Consult your authorized retailer for more information about trailer compatibility and installation. The e-bike must be safe to ride with the trailer accessories installed, and the trailer must be securely attached to the e-bike.

**⚠ WARNING:** E-bike manufacturers cannot test all available trailers for compatibility and safety. Always follow the trailer manufacturer's installation, safety and usage instructions. An incompatible or incorrectly

**installed trailer can cause a crash, which can result in serious personal injury or death.**

Towing a trailer with passengers or cargo increases the weight being towed by the e-bike, which can negatively affect handling in multiple ways:

**Balance and handling:** Passengers or cargo in the trailer can move around and shift the balance and center of gravity of the e-bike, which can affect the safe handling of the e-bike.

**Cornering:** Entering corners must be done more slowly and carefully.

**Stopping:** It takes more distance to slow and stop your e-bike.

**Maneuvering:** Making quick direction changes is more difficult.

**Accelerating:** More motor power is required to accelerate, which requires more battery energy.

**⚠ WARNING: Shifting under a heavy load can cause damage to the drivetrain components, including breaking the chain. This can cause a crash, resulting in serious personal injury or death.**

## 9. DRIVE SYSTEMS

### A) GENERAL INFORMATION ABOUT YOUR DRIVE SYSTEM

Read, understand and follow all drive system manuals provided with your e-bike. Refer to the e-bike manufacturer's instructions for information on how to turn the system on or off. Only turn the e-bike on or off as instructed by the manufacturer.

**⚠ WARNING: NEVER open the battery pack or modify the wiring or any electrical components of your e-bike.**

**Opening the battery or modifying the wiring can result in electric shock and can cause a fire.**

**⚠ WARNING: Do not expose the drive system to excessive water. Never fully submerge the drive system or use a pressure-washer to clean your e-bike. Exposure of the battery or internal components of the drive system to water can result in serious damage to the system components, resulting in electric shock or fire, leading to property damage, serious personal injury or death.**

**⚠ WARNING: The drive system does not contain any user-serviceable parts. Any service should be performed by a qualified technician. Do not attempt to open, disassemble, modify, adjust or service any part of the drive system or its components. Any tampering with the internals of the motor, battery or other drive system components can result in damage to the system or lead to a battery fire, which can cause serious personal injury or death.**

**⚠ WARNING: E-bike drive system components are only intended for use on e-bikes. Do not use these components for any other purpose or vehicle.**

E-bikes are equipped with electronic components that may occasionally require software or firmware updates. Regularly check with your authorized retailer for any updates specific to your e-bike drive system.

The mechanical parts of the drivetrain on most e-bikes are often very similar to a drivetrain used on a regular bicycle, and often shift in the same way. Follow the same recommendations and best practices as a regular bicycle to shift in a way that is most beneficial to the durability and efficiency of your drivetrain .

For more information on servicing your e-bike, including

the mechanical components, please refer to **Page 61, Section 12**: "Maintaining and Servicing Your E-bike".

## 10. FIT

**NOTE: Correct fit is an essential element of bicycling safety, performance and comfort. Making the adjustments to your e-bike that result in correct fit for your body and riding conditions requires experience, skill and special tools. Always have your authorized retailer make the adjustments on your e-bike. Or, if you have the experience, skill and tools, have your authorized retailer check your work before riding.**

**⚠ WARNING: If your e-bike does not fit properly, you may lose control and fall. If your new e-bike doesn't fit, ask your authorized retailer to exchange it before you ride it.**

**⚠ WARNING: A child should never ride an e-bike that is too big for them. While some e-bikes have step-through frames [see fig. 2] that may allow a child to mount an e-bike, that does not mean the e-bike is the right size for them to operate safely. An e-bike that is too big for a child may lead to a loss of control and fall, resulting in serious personal injury or death.**

**1.** Is your e-bike the right size? To check, refer to **Page 40, Section 10**: "Fit", **subsection A**: "Standover Height". If your e-bike is too large or too small for you, you may lose control and fall. If your new e-bike is not the right size, ask your authorized retailer to exchange it before you ride it.

**2.** Is the saddle at the right height? To check, refer to **Page 42, Section 10**: "Fit", **subsection B**: "Saddle Position". If you adjust your saddle height, follow the

Minimum Insertion instructions on **Page 42, Section 10**: "Fit", **subsection B**: "Saddle Position".

**3.** Are saddle and seat post securely clamped? A correctly tightened saddle will allow no saddle movement in any direction. Refer to **Page 42, Section 10**: "Fit", **subsection B**: "Saddle Position".

**4.** Are the stem and handlebars at the right height for you? If not, refer to **Page 43, Section 10**: "Fit", **subsection C**: "Handlebar Height and Angle".

**5.** Can you comfortably operate the brakes? If not, you may be able to adjust their angle and reach. Refer to **Section 10**: "Fit", **subsections D**: "Control Position Adjustments" on **Page 44** and **E**: "Brake Reach" on **Page 44**.

**6.** Do you fully understand how to operate your new e-bike? If not, before your first ride, have your authorized retailer explain any functions or features that you do not understand.

## A) STANDOVER HEIGHT


**Please note: It is best to measure in person with a authorized retailer. Listed below are a few general tips on frame sizing. If for any reason you suspect you are on the wrong size bicycle, double check your fit with your authorized retailer before riding it.**

Standover height can help assess urban, fitness, hybrid and gravel e-bike frame sizing. Standover is the height of a e-bike's toptube at the point you would be standing directly above were you to move forward, off the saddle, and stand with both feet resting flat on the ground, evenly spaced apart in a normal and comfortable standing position. The highest point on the frame, directly beneath you, is a e-bike's standover height, indicated by arrow in diagram [**fig. 7a**].

**Road, drop bar, gravel e-bikes, urban e-bikes:** You should be able to comfortably stand, wearing loose fitting clothing, above the frame's toptube with both feet flat on the ground. In the event of emergency, it's important to ensure that you could jump off your saddle without harming yourself, standing above the e-bike's toptube.

**Mountain e-bike/Mountain e-bike full suspension:** Due to a preference for low-slung frames and adequate seatpost insertion for long-travel seatpost droppers, standover height is not the best way to measure frame fit. Instead, for a given size, ensure that:


1. You have appropriate leg extension when the dropper seatpost is fully extended.
  - If not, you may be on too large of a frame, or you may need to reduce your dropper seatpost travel. Be sure to have your authorized retailer help you with this.
2. The reach measurement is appropriate. Reach is the distance from your bottom bracket, forward to your headtube, as shown in the diagram [fig. 7b]. It can affect the stability of an e-bike, your weight over the front wheel and a rider's sense of control. It is important that you are

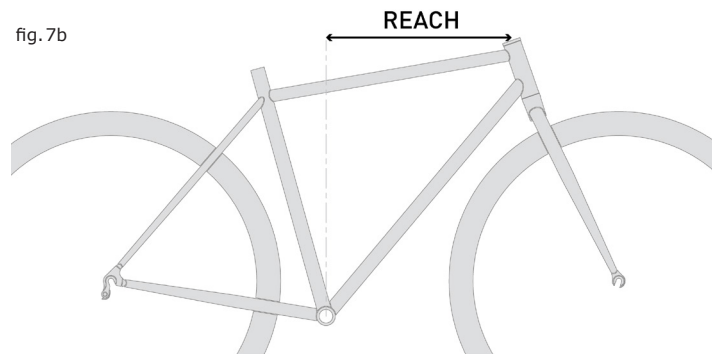

neither too stretched out, nor too tightly positioned and scrunched when seated with the dropper seatpost fully extended and your hands grasping the handlebars. Please work with your authorized retailer to ensure your reach measurement is appropriate.

**3. Handlebar height and stack.** As frame sizes become larger for full-suspension e-bikes, the headtube length grows, raising your handlebar height. Too high of a handlebar height may not place enough weight on the front wheel, creating a dangerous situation where the front wheel can easily wash out beneath a rider, causing the rider to lose control and potentially crash. Too low of a handlebar can place the rider with too much weight on the front wheel and too far over the front wheel, increasing the risk of falling over the handlebars. Be sure to check with your authorized retailer that your handlebars are the appropriate height for you, and that the position is comfortable for you.

**Step-through frames:** Just like full-suspension mountain e-bikes, standover height does not apply to

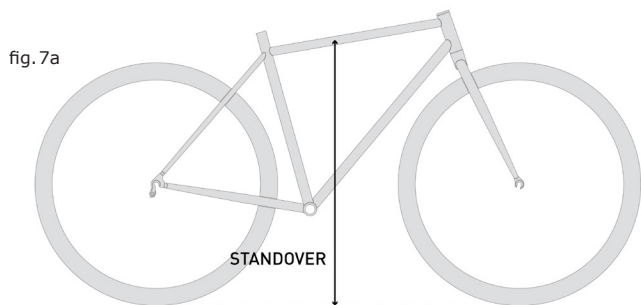

step-through frames. Instead, make sure that you are able to attain appropriate leg extension with your saddle raised to a position that does not exceed the minimum insertion requirement on the seatpost. Also, make sure that you are in a comfortable riding position when seated with your saddle at the correct height: you are neither too close, nor too far from the handlebars.

## B) SADDLE POSITION

Correct saddle adjustment is an important factor in getting the most performance and comfort from your bicycle. If the saddle position is not comfortable for you, see your authorized retailer, who has the tools and skill to change it. The saddle can be adjusted in three directions:

**1. Up and down adjustment.** To check for correct saddle height [fig. 8]:

- sit on the saddle;
- place one heel on a pedal;
- rotate the crank until the pedal with your heel on it is in the down position and the crank arm is parallel to the seat tube.

If your leg is not completely straight and just touching the center of the pedal, your saddle height needs to be adjusted. If your hips must rock for the heel to reach the pedal, the saddle is too high. If your leg is bent at the knee with your heel on the pedal, the saddle is too low.

Ask your authorized retailer to set the saddle for your optimal riding position and to show you how to make this adjustment. If you choose to make your own saddle height adjustment:




fig. 8

- loosen the seatpost clamp
- raise or lower the seatpost in the seat tube
- make sure the saddle is straight, in line with the frame's top tube and/or not skewed left or right of the e-bike's centerline
- retighten the seatpost clamp to the recommended torque (see the manufacturer's instructions).

Once the saddle is at the correct height, make sure that the seatpost does not project from the frame beyond its "Minimum Insertion" or "Maximum Extension" mark [fig. 9].

**⚠ WARNING: If your seatpost is not inserted in the seat tube as described in B.1 above, the seatpost, binder or even frame may break, which could cause you to lose control and fall.**

**2. Front and back adjustment.** The saddle can be adjusted forward or backward to help you get the optimal position on the bike. Ask your authorized retailer to set the saddle for your optimal riding position and to show you how to make this adjustment. If you choose to make your own front and back adjustment, make sure that the clamp mechanism is clamping on the straight part of the saddle rails and is not touching the curved part of the rails, and that you are using the recommended torque on the clamping fastener(s) (see the manufacturer's instructions).

**3. Saddle angle adjustment.** Most people prefer a horizontal saddle; but some riders like the saddle nose angled up or down just a little. Your authorized retailer can adjust saddle angle or teach you how to do it. If you choose to




fig. 9

make your own saddle angle adjustment and you have a single bolt saddle clamp on your seatpost, it is critical that you loosen the clamp bolt sufficiently to allow any serrations on the mechanism to disengage before changing the saddle's angle, and then that the serrations fully reengage before you tighten the clamp bolt to the recommended torque (see the manufacturer's instructions).

**⚠ WARNING: When making saddle angle adjustments with a single bolt saddle clamp, always check to make sure that the serrations on the mating surfaces of the clamp are not worn. Worn serrations on the clamp can allow the saddle to move, causing you to lose control and fall. Always tighten fasteners to the correct torque. Bolts that are too tight can stretch and deform. Bolts that are too loose can move and fatigue. Either mistake can lead to a sudden failure of the bolt, causing you to lose control and fall.**

**NOTE: If your bicycle is equipped with a dropper or telescoping seatpost, please note that the seatpost requires periodic service or maintenance. Ask your authorized retailer for recommended service intervals.**

Small changes in saddle position can have a substantial effect on performance and comfort. To find your best saddle position, make only one adjustment at a time.

**⚠ WARNING: After any saddle adjustment, be sure that the saddle-adjusting mechanism is properly seated and tightened before riding. A loose saddle clamp or seatpost clamp can cause damage to the seatpost, or can cause you to lose control and fall. A correctly tightened saddle-adjusting mechanism will allow no saddle movement in any direction. Periodically check to make sure that the saddle-adjusting mechanism is properly tightened.**

If, in spite of carefully adjusting the saddle height, tilt and

fore-and-aft position, your saddle is still uncomfortable, you may need a different saddle design. Saddles are available in many different shapes and sizes. Your authorized retailer can help you select a saddle which, when correctly adjusted for your body and riding style, will be comfortable.

**⚠ WARNING: Some people have claimed that extended riding with a saddle which is incorrectly adjusted or which does not support your pelvic area correctly can cause short-term or long-term injury to nerves and blood vessels, or even impotence. If your saddle causes you pain, numbness or other discomfort, listen to your body and stop riding until you see your authorized retailer about saddle adjustment or a different saddle.**

### C) HANDLEBAR HEIGHT AND ANGLE

Your e-bike is equipped with a "threadless" stem [fig. 10], which clamps on to the outside of the steerer tube. Your authorized retailer may be able to change handlebar height by moving height-adjustment spacers from below the stem to above the stem, or vice versa. Otherwise, you'll have to get a stem of different length or rise. Consult your authorized retailer. Do not attempt to do this yourself, as it requires special knowledge.




fig. 10

**⚠ WARNING: On some e-bikes, changing the stem or stem height can affect the tension of the front brake cable, locking the front brake or creating excess cable slack which can make the front brake inoperable. If the front brake pads move in toward the wheel rim or out away from the wheel rim when the stem or stem height is changed, the brakes must be correctly adjusted before you ride the e-bike.**

**⚠ WARNING:** Always tighten fasteners to the correct torque. Bolts that are too tight can stretch and deform. Bolts that are too loose can move and fatigue. Either mistake can lead to a sudden failure of the bolt, causing you to lose control and fall.

Your authorized retailer can also change the angle of the handlebar.

**⚠ WARNING:** An insufficiently tightened stem clamp bolt or handlebar clamp bolt may compromise steering action, which could cause you to lose control and fall. Place the front wheel of the e-bike between your legs and attempt to twist the handlebar/stem assembly. If you can twist the stem in relation to the front wheel or turn the handlebars in relation to the stem, the bolts are insufficiently tightened.

**⚠ WARNING:** Be aware that adding aerodynamic extensions to handlebars will change the steering and braking response of the e-bike.

## D) CONTROL POSITION ADJUSTMENTS

The angle of the brake and shift control levers and their position on the handlebars can be changed. Ask your authorized retailer to make the adjustments for you. If you choose to make your own control lever angle adjustment, be sure to retighten the clamp fasteners to the recommended torque (see the manufacturer's instructions).

## E) BRAKE REACH

Many e-bikes have brake levers which can be adjusted for reach. If you have small hands or find it difficult to squeeze the brake levers, your authorized retailer can either adjust the reach or fit shorter reach brake levers.

**⚠ WARNING:** The shorter the brake lever reach, the more critical it is to have correctly adjusted brakes, so

that full braking power can be applied within available brake lever travel. Brake lever travel insufficient to apply full braking power can result in loss of control, which may result in serious injury or death.

## 11. TECHNICAL INFORMATION

It's important to your safety, performance and enjoyment to understand how things work on your e-bike. We urge you to ask your authorized retailer how to do the things described in this section before you attempt them yourself, and that you have your authorized retailer check your work before you ride the e-bike. If you have even the slightest doubt as to whether you understand something in this section of the Manual, talk to your authorized retailer. **See also Appendix A and B.**

### A) WHEELS

E-bike wheels are designed to be removable for easier transportation and for repair of a tire puncture. In most cases, the wheel axles are inserted into slots, called "dropouts" in the fork and frame, but some bikes use what is called a "thru-axle" wheel mounting system.

If you have an e-bike with a thru-axle wheel mounting system, refer to **Page 47, Section 11: "Tech", subsection A.3: "Wheels - Thru-axle wheel mounting system"**.

If you do not have a bicycle with a thru-axle wheel mounting system, it will have wheels are secured in one of three ways:

1. A hollow axle with a shaft ("skewer") running through it which has an adjustable-tension nut on one end and an over-center cam lever on the other (cam action system), [**fig. 11a & 11b**].
2. A hollow axle with a shaft ("skewer") running through

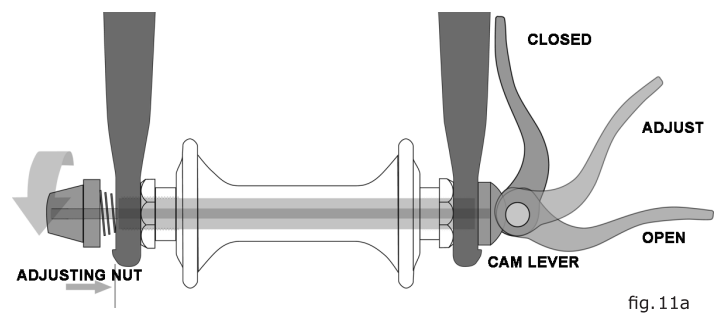


fig. 11a

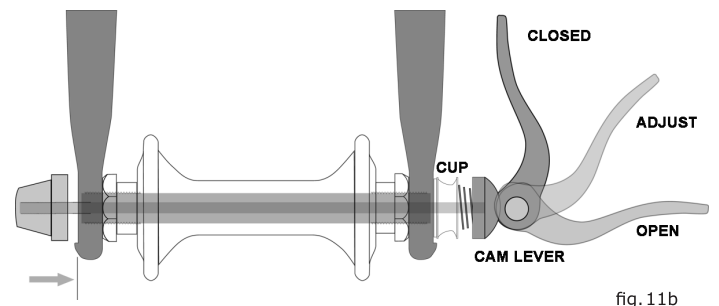


fig. 11b

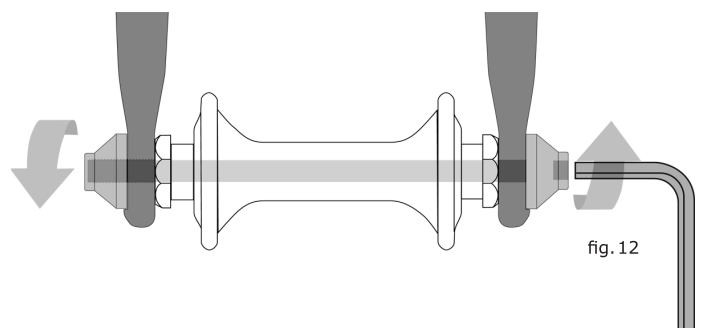


fig. 12

it which has a nut on one end and a fitting for a hex key, lock lever or other tightening device on the other (through-bolt), [fig. 12].

3. Hex nuts or hex key bolts which are threaded on to or into the hub axle (bolt-on wheel), [fig. 13].

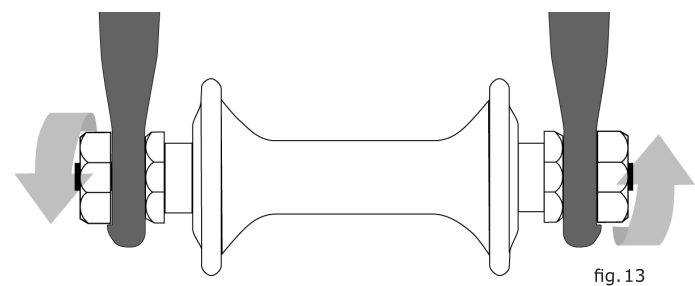


fig. 13

Your e-bike may be equipped with a different securing method for the front wheel than for the rear wheel. Discuss the wheel-securing method for your e-bike with your authorized retailer.

**It is very important that you understand the type of wheel-securing method on your e-bike, that you know how to secure the wheels correctly, and that you know how to apply the correct clamping force that safely secures the wheel. Ask your authorized retailer to instruct you in correct wheel removal and installation, and ask them to give you any available manufacturer's instructions.**

**⚠ WARNING: Riding with an improperly secured wheel can allow the wheel to wobble or fall off the**

e-bike, which can cause serious injury or death. Therefore, it is essential that you:

1. Ask your authorized retailer to help you make sure you know how to install and remove your wheels safely.
2. Understand and apply the correct technique for clamping your wheel in place.
3. Each time, before you ride the e-bike, check that the wheel is securely clamped.

**The clamping action of a correctly secured wheel must emboss the surfaces of the dropouts.**


### 1. Front Wheel Secondary Retention Devices

Most e-bikes have front forks that utilize a secondary wheel retention device to reduce the risk of the wheel disengaging from the fork if the wheel is incorrectly secured. Secondary retention devices are not a substitute for correctly securing your front wheel.

Secondary retention devices fall into two basic categories:

- a. The clip-on type is a part which has been added to the front wheel hub or front fork.
- b. The integral type is molded, cast or machined into the outer faces of the front fork dropouts.

Ask your authorized retailer to explain the particular secondary retention device on your e-bike.

** WARNING: Do not remove or disable the secondary retention device. As its name implies, it serves as a back-up for a critical adjustment. If the wheel is not secured correctly, the secondary retention device can reduce the risk of the wheel disengaging from the fork. Removing or disabling the secondary retention device may also void the warranty. Secondary retention devices are not a substitute for correctly securing your wheel. Failure to properly secure the wheel can cause the**


**wheel to wobble or disengage, which could cause you to lose control and fall, resulting in serious injury or death.**


### 2. Wheels with Cam-Action Systems

There are currently two types of over-center cam wheel retention mechanisms: the traditional over-center cam [fig. 11a], and the cam-and-cup system [fig. 11b]. Both use an over-center cam action to clamp the e-bike's wheel in place. People also commonly refer to these as quick-release axles. Your e-bike may use one of these styles for the front wheel, and a different for the rear wheel.

#### a. Adjusting the traditional cam action mechanism [fig. 11a]

The wheel hub is clamped in place by the force of the over-center cam pushing against one dropout and pulling the tension-adjusting nut, by way of the skewer, against the other dropout. The amount of clamping force is controlled by the tension-adjusting nut. Turning the tension-adjusting nut clockwise while keeping the cam lever from rotating increases clamping force; turning it counterclockwise while keeping the cam lever from rotating reduces clamping force. Less than half a turn of the tension-adjusting nut can make the difference between safe clamping force and unsafe clamping force.

** WARNING: The full force of the cam action is needed to clamp the wheel securely. Holding the nut with one hand and turning the lever like a wing nut with the other hand until everything is as tight as you can get it will not clamp a cam-action wheel safely in the dropouts. See also the first WARNING in this Section, [p. 45].**

** WARNING: When using a threaded, through-bolt over-cam mechanism, be sure to only thread the axle into the dropout while the through-bolt over-cam is in**

the **OPEN** position. If adjusted in the **CLOSED** position, the wheel will not be held securely in place, and could result in serious injury or death.

### b. Adjusting the cam-and-cup mechanism [fig. 11b]

The cam-and-cup system on your front wheel will have been correctly adjusted for your e-bike by your authorized retailer. Ask your authorized retailer to check the adjustment every six months. **Do not use a cam-and-cup front wheel on any bicycle other than the one for which your authorized retailer adjusted it.**

### 3. Thru-Axle Wheel Mounting System

**If you have an e-bike equipped with thru-axle front or rear wheels, make sure that your authorized retailer has given you the manufacturer's instructions, and follow those when installing or removing a thru-axle wheel. If you don't know what a thru-axle is, ask your authorized retailer.**

If your e-bike is equipped with a thru-axle, the thru-axle length, diameter, and thread pitch must match the specifications of your frame, fork, and wheel hubs. Always install or remove your wheel in accordance with the thru-axle manufacturer's instructions, and consult the manufacturer if you have any questions.

If you intend to replace the thru-axle, make sure that the new thru-axle is compatible with your e-bike. Do not remove the thru-axle from your e-bike and use it on a different e-bike, as it may not be compatible and will not properly secure your wheel.

**⚠ WARNING: A wheel attachment device that is not properly secured can allow the wheel to loosen or come off, suddenly stop the wheel, decrease your control, and cause you to fall, resulting in serious**

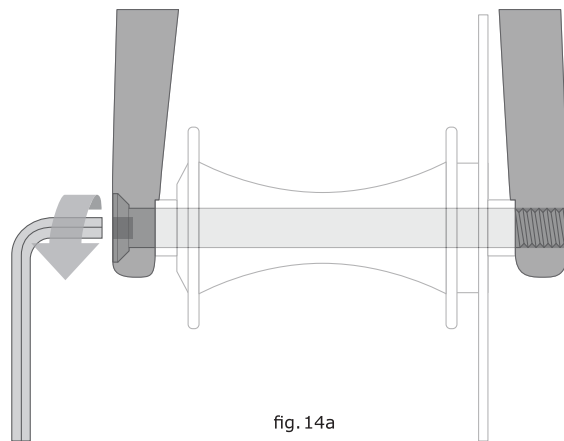


fig. 14a

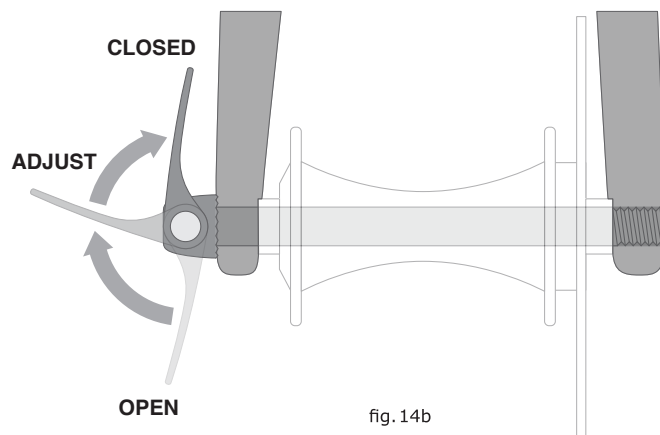


fig. 14b

**injury or death. Ensure the thru-axle is not interfering with any part of the e-bike and is fully secured.**

a. Adjusting the thru-axle mechanism [**fig. 14a & 14b**]

The thru-axle is inserted through the unthreaded hole in the frame or fork's dropout, through the wheel hub, and is threaded directly into the opposing dropout by tightening the thru-axle. Common installation methods may use an Allen hex key [**fig. 14a**] or a cam lever [**fig. 14b**]. Please refer to the manufacturer's instructions for specific information about your thru-axle's operation, including correct torque specifications or lever adjustment information.

#### 4. Removing and Installing Wheels

**⚠ WARNING: If your e-bike is equipped with a hub drive motor, please see specific instructions from the motor manufacturer for removing the rear wheel, paying careful attention to disconnect any wiring necessary for removal as instructed by the hub drive motor manufacturer.**

**⚠ CAUTION: If your e-bike has a disc brake, exercise care in touching the rotor or caliper. Disc rotors have sharp edges, and both rotor and caliper can get very hot during use.**

a. Removing a disc brake or rim brake Front Wheel

(1) If your e-bike has rim brakes, disengage the brake's quick-release mechanism to increase the clearance between the tire and the brake pads. Refer to **Page 52, Section 11: "Tech", subsection C: "Brakes"** [**fig. 16, 17, 18**].

(2) If your e-bike has cam action front wheel retention or "quick-release axle," move the cam lever from the locked or CLOSED position to the OPEN position [**fig. 11a & 11b**]. If your e-bike has through-bolt or bolt-on

front wheel retention, loosen the fastener(s) a few turns counter-clockwise using an appropriate wrench, lock key or the integral lever.

(3) If your front fork has a clip-on type secondary retention device, disengage it. If your front fork has an integral secondary retention device, and a traditional cam-action system [**fig. 11a**] loosen the tension-adjusting nut enough to allow removing the wheel from the dropouts. If your front wheel uses a cam-and-cup system, [**fig. 11b**] squeeze the cup and cam lever together while removing the wheel. No rotation of any part is necessary with the cam-and-cup system.

(4) If your bike has a thru-axle front wheel mounting system [**fig. 14a & 14b**], loosen and remove the thru-axle according to the manufacturer's instructions, then remove the wheel.

You may need to tap the top of the wheel with the palm of your hand to release the wheel from the front fork.

b. Installing a disc brake or rim brake Front Wheel

**⚠ CAUTION: If your e-bike is equipped with a front disc brake, be careful not to damage the disc, caliper or brake pads when re-inserting the disc into the caliper. Never activate a disc brake's control lever unless the disc is correctly inserted in the caliper. Refer to Page 52, Section 11: "Tech", subsection C: "Brakes".**

(1) If your e-bike has cam action front wheel retention, move the cam lever so that it curves away from the wheel [**fig. 11a & 11b**]. This is the OPEN position. If your bike has a thru-axle, through-bolt or bolt-on front wheel retention, go to the next step.

(2) With the steering fork facing forward, insert the wheel between the fork blades so that the axle seats firmly at the top

of the fork dropouts. The cam lever, if there is one, should be on rider's left side of the bicycle [fig. 11a & 11b]. If your e-bike has a clip-on type secondary retention device, engage it.

(3) If your e-bike has a thru-axle front wheel mounting system, insert the thru-axle through the unthreaded dropout side and through the hub body, then thread the thru-axle into the threads of the opposing dropout.

(4) If your bike has a traditional cam-action mechanism: holding the cam lever in the ADJUST position with your right hand, tighten the tension-adjusting nut with your left hand until it is finger tight against the fork dropout [fig. 11a]. If you have a cam-and-cup system: the nut and cup [fig. 11b] will have snapped into the recessed area of the fork dropouts and no adjustment should be required.

(5) While pushing the wheel firmly to the top of the slots in the fork dropouts, and at the same time centering the wheel rim in the fork:

(a) With a cam-action system, move the cam lever upwards and swing it into the CLOSED position [fig. 11a & 11b]. The lever should now be parallel to the fork blade and curved toward the wheel. To apply enough clamping force, you should have to wrap your fingers around the fork blade for leverage, and the lever should leave a clear imprint in the palm of your hand.

(b) With a through-bolt or bolt-on system, tighten the fasteners to the torque specifications in the hub manufacturer's instructions.

(c) With a thru-axle system, tighten the thru-axle [fig. 14a & 14b] according to the manufacturer's instructions.

**NOTE: If, on a traditional cam-action system, the lever cannot be pushed all the way to a position parallel to the fork blade, return the lever to the OPEN position. Then turn the tension-adjusting nut counterclockwise one-quarter turn and try tightening the lever again.**

**⚠ WARNING: Securely clamping the wheel with a cam-action-retention device takes considerable force. If you can fully close the cam lever without wrapping your fingers around the fork blade for leverage, the lever does not leave a clear imprint in the palm of your hand, and the serrations on the wheel fastener do not emboss the surfaces of the dropouts, the tension is insufficient. Open the lever; turn the tension-adjusting nut clockwise a quarter turn; then try again. See also the first WARNING in this Section, [p. 45].**

(6) If you disengaged the brake quick-release mechanism in 4.A.1 above, re-engage it to restore correct brake pad-to-rim clearance.

(7) Spin the wheel to make sure that it is centered in the frame and clears the brake pads; then squeeze the brake lever and make sure that the brakes are operating correctly.

### c. Removing a disc brake or rim brake Rear Wheel

(1) If you have a multi-speed e-bike with a derailleur-gear system: shift the rear derailleur to high gear (the smallest, outermost rear sprocket).

If you have a hub-drive multi-speed e-bike with a derailleur-gear system, follow (1) above, but also make sure to follow the hub-motor manufacturer's instructions and recommendations if necessary to disconnect any wiring prior to wheel removal. If you have a single-speed bike with rim or disc brake, go to step (4) below.

(2) If your e-bike has rim brakes, disengage the brake's quick-release mechanism to increase the clearance between the wheel rim and the brake pads. Refer to **Page 52, Section 11: "Tech", subsection C: "Brakes" [fig. 16, 17, 18].**

(3) On a derailleur-gear system, pull the derailleur body back with your right hand. Some rear derailleurs have a "lock" button designed to hold the derailleur in an open position when removing the rear wheel. Feel free to use this feature if your derailleur is equipped with it.

(4) With a cam-action mechanism, move the quick-release lever to the OPEN position [fig. 11a & 11b]. With a through-bolt or bolt-on mechanism, loosen the fastener(s) with an appropriate wrench, lock lever or integral lever.

(5) If your e-bike has a thru-axle rear wheel mounting system [fig. 14a & 14b], loosen and remove the thru-axle according to the manufacturer's instructions.

(6) Push the rear wheel forward far enough to be able to remove the chain from the rear sprocket, then lift the rear wheel off the ground a few inches and remove it from the rear dropouts.

#### d. Installing a disc brake or rim brake Rear Wheel

**⚠ CAUTION: If your e-bike is equipped with a rear disc brake, be careful not to damage the disc, caliper or brake pads when reinserting the disc into the caliper. Never activate a disc brake's control lever unless the disc is correctly inserted in the caliper.**

(1) With a cam-action system, move the cam lever to the OPEN position [fig. 11a & 11b]. The lever should be on the side of the wheel opposite the derailleur and free-wheel sprockets.

(a) On a derailleur e-bike, make sure that the rear derailleur is still in its outermost, high gear, position; then pull the derailleur body back with your right hand. Put the chain on top of the smallest freewheel sprocket. Some rear derailleurs have a "lock" button designed to hold the

derailleur in an open position when removing or reinserting the rear wheel. Feel free to use this feature if your derailleur is equipped with it.

(b) On a single-speed e-bike, remove the chain from the front sprocket, so that you have plenty of slack in the chain. Put the chain on the rear wheel sprocket.

(2) Then, insert the wheel into the frame dropouts and pull it all the way in to the dropouts.

**NOTE: On a single speed or a hub drive e-bike, replace the chain on the chainring; pull the wheel back in the dropouts so that it is straight in the frame and the chain has about 1/4 inches of up-and-down play. If using a hub drive e-bike that relies on a wired connection to provide assist or throttle, be sure to reconnect the necessary wires before use. Give a visual inspection to ensure they are not loose and will not interfere with the chain, spokes, or any part of the rotating wheel. If there is any doubt, have an authorized retailer check over the wheel before riding it.**

(a) With a cam-action system, move the cam lever upward and swing it into the CLOSED position [fig. 11a & 11b]. The lever should now be parallel to the seatstay or chainstay and curved toward the wheel. To apply enough clamping force, you should have to wrap your fingers around the seatstay or chainstay for leverage, and the lever should leave a clear imprint in the palm of your hand.

(b) With a through-bolt or bolt-on system [fig. 12, 13], tighten the fasteners to the torque specifications in the hub manufacturer's instructions.

(c) If you have a threaded through-bolt cam-action system [fig. 14b], make sure that the threads of the through-bolt are engaged and evenly threaded within the receiving dropout hole or nut before moving the cam lever upward and into the CLOSED position. To apply enough clamping force, you should have to wrap your fingers around the

seatstay or chainstay for leverage, and the lever should leave a clear imprint on the palm of your hand.

**NOTE: If, on a traditional cam-action system, the lever cannot be pushed all the way to a position parallel to the seatstay or chainstay, return the lever to the OPEN position. Then turn the tension-adjusting nut counterclockwise one-quarter turn and try tightening the lever again.**

**⚠ WARNING: Securely clamping the wheel with a cam-action retention device takes considerable force. If you can fully close the cam lever without wrapping your fingers around the seatstay or chainstay for leverage, the lever does not leave a clear imprint in the palm of your hand, and the serrations on the wheel fastener do not emboss the surfaces of the dropouts, the tension is insufficient. Open the lever; turn the tension-adjusting nut clockwise a quarter turn; then try again. See also the first WARNING in this Section, [p. 45].**

(3) If you disengaged the brake quick-release mechanism in Section 4.C.2 above, re-engage it to restore correct brake pad-to-rim clearance.

(4) Spin the wheel to make sure that it is centered in the frame and clears the brake pads; then squeeze the brake lever and make sure that the brakes are operating correctly.

(5) If you used the "lock" feature (if applicable) on your derailleur in step (2) above, be sure to "unlock" your derailleur cage by pulling the cage slightly forward, toward the bottom bracket, then easing the derailleur cage back to its resting position, ensuring the chain now has tension.

## B) SEATPOST CAM-ACTION CLAMP

Some e-bikes are equipped with a cam-action seatpost binder, also commonly referred to as a "seatpost quick re-

lease." The seatpost cam-action binder works exactly like the traditional wheel cam-action fastener. Refer to **Page 46, Section 11: "Tech", subsection A.2: "Wheels with cam-action systems"**. While a cam-action binder looks like a long bolt with a lever on one end and a nut on the other, the binder uses an over-center cam action to firmly clamp the seatpost [**see fig. 11a**].

**⚠ WARNING: Riding with an improperly tightened seatpost can allow the saddle to turn or move and cause you to lose control and fall. Therefore:**

- 1. Ask your authorized retailer to help you make sure you know how to correctly clamp your seatpost.**
- 2. Understand and apply the correct technique for clamping your seatpost.**
- 3. Before you ride the e-bike, first check that the seatpost is securely clamped.**

### Adjusting the seatpost cam-action mechanism

The action of the cam squeezes the seat collar around the seatpost to hold the seatpost securely in place. The amount of clamping force is controlled by the tension-adjusting nut. Turning the tension-adjusting nut clockwise while keeping the cam lever from rotating increases clamping force; turning it counterclockwise while keeping the cam lever from rotating reduces clamping force. Less than half a turn of the tension-adjusting nut can make the difference between safe and unsafe clamping force.

**⚠ WARNING: The full force of the cam action is needed to clamp the seatpost securely. Holding the nut with one hand and turning the lever like a wing nut with the other hand until everything is as tight as you can get it will not clamp the seatpost safely.**

**⚠ WARNING: If you can fully close the cam lever**

without wrapping your fingers around the seatpost or a frame tube for leverage, and the lever does not leave a clear imprint in the palm of your hand, the tension is insufficient. Open the lever; turn the tension-adjusting nut clockwise a quarter turn; then try again.

## C) BRAKES

There are two general types of bicycle brakes: rim brakes, which operate by squeezing the wheel rim between two brake pads; and disc brakes, which operate by squeezing a hub-mounted disc between two brake pads. Both can be operated by way of a handlebar-mounted lever.

### **⚠ WARNING:**

**1. Riding with improperly adjusted brakes, worn brake pads, or wheels on which the rim-wear mark is visible is dangerous and can result in serious injury or death.**

**2. Applying brakes too hard or too suddenly can lock up a wheel, which could cause you to lose control and fall [see fig. 15]. Sudden or excessive application of the front brake may pitch the rider over the handlebars, which may result in serious injury or death.**

**3. Some bicycle brakes, such as disc brakes [fig. 16] and linear-pull brakes [fig. 17], are extremely powerful. Take extra care in becoming familiar with these brakes and exercise particular care when using them.**

**4. Disc brakes can get extremely hot with extended use. Be careful not to touch a disc brake until it has had plenty of time to cool.**




fig. 15

**5. See the brake manufacturer's instructions for operation and care of your brakes, and for when brake pads must be replaced. If you do not have the manufacturer's instructions, see your authorized retailer or contact the brake manufacturer.**

**6. If you are replacing worn or damaged parts, use only manufacturer-approved genuine replacement parts.**

### 1. Brake controls and features

It's very important to your safety that you learn and remember which brake lever controls which brake on your e-bike. Traditionally, in the U.S. the right brake lever controls the rear brake and the left brake lever controls the front brake; but, to check if your e-bike's brakes are set up this way, squeeze one brake lever and look to see which brake, front or rear, engages. Now do the same with the other brake lever.

Make sure that your hands can reach and squeeze the brake levers comfortably. If your hands are too small to operate the levers comfortably, consult your authorized retailer before riding the e-bike. The lever reach may be adjustable; or you may need a different brake lever design.

fig. 16





fig. 17



Most rim brakes have some form of quick-release mechanism to allow the brake pads to clear the tire when a wheel is removed or reinstalled. When the brake quick release is in the open position, the brakes are inoperative. Ask your authorized retailer to make sure that you understand the way the brake quick-release works on your e-bike [fig. 17, 18] and check each time to make sure both brakes work correctly before you get on the e-bike.




fig. 18

## 2. How brakes work

The braking action of an e-bike is a function of the friction between the braking surfaces. To make sure that you have maximum friction available, keep your wheel rims and brake pads or the disc rotor and caliper clean and free of dirt, lubricants, waxes or polishes.

Brakes are designed to control your speed, not just to stop the e-bike. Maximum braking force for each wheel occurs at the point just before the wheel “locks up” (stops rotating) and starts to skid. Once the tire skids, you actually lose most of your stopping force and all directional control. You need to practice slowing and stopping smoothly without locking up a wheel. The technique is called progressive brake modulation. Instead of jerking the brake lever to the position where you think you’ll generate appropriate braking force, squeeze the lever, progressively increasing the braking force. If you feel the wheel begin to lock up, release pressure just a little to keep the wheel rotating just short of lockup. It’s important to develop a feel for the amount of brake lever pressure required for each wheel at different speeds and on different surfaces. To better understand this, experiment a little

by walking your e-bike and applying different amounts of pressure to each brake lever, until the wheel locks.

When you apply one or both brakes, the e-bike begins to slow, but your body wants to continue at the speed at which it was going. This causes a transfer of weight to the front wheel (or, under heavy braking, around the front wheel hub, which could send you flying over the handlebars).

A wheel with more weight on it will accept greater brake pressure before lockup; a wheel with less weight will lock up with less brake pressure.

So, as you apply brakes and your weight is transferred forward, you need to shift your body toward the rear of the e-bike, to transfer weight back on to the rear wheel; and at the same time, you need to both decrease rear braking and increase front braking force. This is even more important on descents, because descents shift weight forward.

Two keys to effective speed control and safe stopping are controlling wheel lockup and weight transfer. This weight transfer is even more pronounced if your e-bike has a front-suspension fork. Front suspension “dips/compresses/dives” under braking, increasing the weight transfer (see also **Page 56, Section 11: “Tech, subsection F: “Bicycle Suspension”**). Practice braking and weight transfer techniques where there is no traffic or other hazards and distractions.

Everything changes when you ride on loose surfaces or in wet weather. It will take longer to stop on loose surfaces or in wet weather. Tire adhesion is reduced, so the wheels have less cornering and braking traction and can lock up with less brake force. Moisture or dirt on the brake pads reduces their ability to grip. The way to maintain control on loose or wet surfaces is to go more slowly.

## D) SHIFTING GEARS

Your multi-speed e-bike will have a derailleur drivetrain.

## 1. How a derailleur drivetrain works

If your e-bike has a derailleur drivetrain, the gear-changing mechanism will have:

- a rear cassette or freewheel sprocket cluster
- a rear derailleur
- occasionally a front derailleur
- one or two shifters
- one, two or three front sprockets called chainrings
- a drive chain

### a. Shifting Gears

There are several different types and styles of shifting controls: levers, twist grips, triggers, combination shift/brake controls and push-buttons. Ask your authorized retailer to explain the type of shifting controls that are on your e-bike, and to show you how they work.

When shifting, the e-bike derailleur system design requires that the drive chain be moving forward and be under at least some tension. A derailleur will shift only if you are pedaling forward.

**⚠ CAUTION: Never move the shifter while pedaling backward, nor pedal backwards immediately after having moved the shifter. This could jam the chain and cause serious damage to the e-bike.**

### b. Shifting the Rear Derailleur

The rear derailleur is controlled by the right shifter. The function of the rear derailleur is to move the drive chain from one gear sprocket to another. The smaller sprockets on the gear cluster produce higher gear ratios. Pedaling in the higher gears requires greater pedaling effort, but takes you a greater distance with each revolution of the pedal cranks. The larger sprockets produce lower gear ratios. Using them requires less pedaling effort, but takes

you a shorter distance with each pedal crank revolution. In order for the derailleur to move the chain from one sprocket to another, the rider must be pedaling forward.

### c. Shifting the Front Derailleur

The front derailleur, which is controlled by the left shifter, shifts the chain between the larger and smaller chainrings. Shifting the chain onto a smaller chainring makes pedaling easier. Shifting to a larger chainring makes pedaling harder.

### d. Which gear should I be in?

The combination of largest rear and smallest front gears [fig. 19] is for the steepest hills. The smallest rear and largest front combination is for the greatest speed. You can begin pedaling from any gear, you do not have to ride beginning in the easiest gear. However, find the “starting gear” which is right for your level of ability — a gear which is hard enough for quick acceleration but easy enough to let you start from a stop without wobbling — and experiment with moving into harder and easier gears to get a feel for the different gear combinations. At first, practice shifting where there are no obstacles, hazards or other traffic, until you’ve built up your confidence. Learn not to use either the “smallest to smallest,” meaning smallest front chainring and smallest rear cog, or “largest to largest,” meaning biggest-front chainring and biggest-rear cog gear combinations because

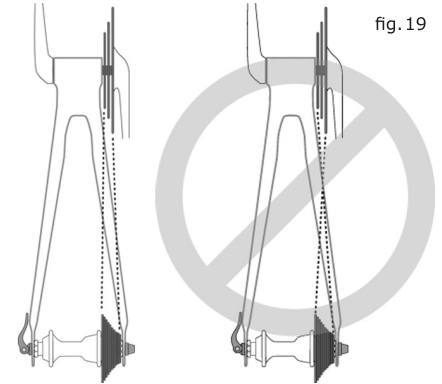


fig. 19

they may cause unacceptable stress on the drivetrain. Learn to anticipate the need to shift, and shift to a lower gear *before* the hill gets too steep. If you have difficulties with shifting, the problem could be mechanical adjustment. See your authorized retailer for help.

#### **e. What if it won't shift gears?**

If moving the shift control one click, repeatedly fails to result in a smooth shift to the next gear, chances are that the mechanism is out of adjustment. Take the e-bike to your authorized retailer to have it adjusted.

**⚠ WARNING: Never shift a derailleur onto the largest or the smallest sprocket if the derailleur is not shifting smoothly. The derailleur may be out of adjustment and the chain could jam, causing you to lose control and fall.**

### **E) PEDALS**

Toe Overlap is when your toe can touch the front wheel when you turn the handlebars to steer while a pedal is in the forward-most position. This is common on small-framed e-bikes, and is avoided by keeping the inside pedal up and the outside pedal down when turning. On any e-bike, this technique will also prevent the inside pedal from striking the ground in a turn.

**NOTE: Changing tire size or pedal crank arm length affects toe overlap.**

**⚠ WARNING: Toe Overlap could cause you to lose control and fall. Ask your authorized retailer to help you determine if the combination of frame size, crank arm length, pedal design and shoes you will use results in pedal overlap. Whether you have overlap or not, you must keep the inside pedal up and the outside pedal down when making sharp turns.**

Some e-bikes come equipped with pedals that have sharp and potentially dangerous surfaces. These surfaces are

designed to add safety by increasing adhesion between the rider's shoe and the pedal. If your e-bike has this type of high-performance pedal, you must take extra care to avoid serious injury from the pedals' sharp surfaces. Based on your riding style or skill level, you may prefer a less aggressive pedal design, or chose to ride with shin pads. Your authorized retailer can show you a number of options and make suitable recommendations.

Cliplless pedals (sometimes called "step-in pedals") are another means to keep feet securely in the correct position for maximum pedaling efficiency. They have a plate, called a "cleat," on the sole of the shoe, which clicks into a mating spring-loaded fixture on the pedal. They only engage or disengage with a very specific motion which must be practiced until it becomes instinctive. Cliplless pedals require shoes and cleats which are compatible with the make and model pedal being used.

**Please note: Kona bicycles do not arrive with cliplless pedals, however we are aware that many of our customers choose to use them, and it is not outside the intent of the bicycle.**

**However, please note that if you choose to use cliplless pedals, it is your own decision and you accept the additional inherent risks involved and associated with riding with cliplless pedals.**

Many cliplless pedals are designed to allow the rider to adjust the amount of force needed to engage or disengage the foot. Follow the pedal manufacturer's instructions, or ask your authorized retailer to show you how to make this adjustment. Use the easiest setting until engaging and disengaging becomes a reflex action, but always make sure that there is sufficient tension to prevent unintended release of your foot from the pedal.

**⚠ WARNING: Clipless pedals are intended for use with shoes specifically made to fit them and are designed to firmly keep the foot engaged with the pedal. Do not use shoes which do not engage the pedals correctly.**

Practice is required to learn to engage and disengage the foot safely. Until engaging and disengaging the foot becomes a reflex action, the technique requires concentration which can distract the rider's attention, causing the rider to lose control and fall. Practice engaging and disengaging clipless pedals in a place where there are no obstacles, hazards or traffic; and be sure to follow the pedal manufacturer's setup and service instructions. If you do not have the manufacturer's instructions, see your authorized retailer or contact the manufacturer.

## F) BICYCLE SUSPENSION

Many e-bikes are equipped with suspension systems. There are many different types of suspension systems — too many to deal with individually in this Manual. If your e-bike has a suspension system of any kind, be sure to read and follow the suspension manufacturer's setup and service instructions. If you do not have the manufacturer's instructions, see your authorized retailer or contact the manufacturer.

**⚠ WARNING: Failure to maintain, check and properly adjust the suspension system may result in suspension malfunction, which may cause you to lose control and fall.**

If your bike has suspension, the increased speed you may develop also increases your risk of injury. For example, when braking, the front of a suspended bike dips, compresses or dives. You could lose control and fall if you do not have experience with this system. Learn to handle your suspension system safely.

**⚠ WARNING: Changing suspension adjustment can**

**change the handling and braking characteristics of your e-bike. Never change suspension adjustment unless you are thoroughly familiar with the suspension system manufacturer's instructions and recommendations, and always check for changes in the handling and braking characteristics of the e-bike after a suspension adjustment by taking a careful test ride in a hazard-free area.**

Suspension can increase control and comfort by allowing the wheels to better follow the terrain. This enhanced capability may allow you to ride faster; but you must not confuse the enhanced capabilities of the e-bike with your own capabilities as a rider. Increasing your skill will take time and practice. Proceed carefully until you have learned to handle the full capabilities of your e-bike.

**⚠ WARNING: Not all e-bikes can be safely retrofitted with some types of suspension systems. Before retrofitting the suspension of any Kona e-bike, check with Kona to make sure that what you want to do is compatible with the e-bike's design, and whether the warranty will be voided. Failing to do so can result in catastrophic frame failure.**

## G) SERVICE NOTES FOR KONA FULL SUSPENSION

Contaminated bearings can rust & seize, and cause frame damage. Additionally, worn-out bearings can create additional, or unnecessary linkage movement or "play" and may also cause frame damage. Regularly inspect the bearings and make sure that they allow the linkage to move freely.

It is best to take your full-suspension bike to a bike shop to have its linkage, rear shock, and suspension fork inspected periodically. Suspension manufacturer recommended service intervals vary from brand to brand.

However, most fork manufacturers recommend having

the lowers serviced: often cleaning, replacing seals and replacing fluid, every 20-50 hours of ride time, and based on performance preferences and severity of your riding environment. Roughly every 100 hours of riding, many manufacturers recommend a full fork overhaul, including servicing the damper.

Rear suspension service recommendations vary brand to brand as well, but generally involve 40-60 hour recommendations for minor services including new seals, fluid and cleaning for air shocks, and often closer to 100 hour ride time service intervals for coil shocks.

Please follow the suspension manufacturer recommended guidelines for your suspension fork and rear shock service intervals.

**⚠ WARNING: Failure to adhere to suspension service intervals may void your suspension fork manufacturer or rear shock manufacturer's warranty.**

**⚠ WARNING: Failure to service or regularly service your suspension can lead to a loss of performance, excessive wear, and may result in unsafe suspension that could cause loss of control or even death.**

## H) TIRES AND TUBES

**1. TIRES:** Bicycle tires are available in many designs and specifications, ranging from general-purpose designs to tires designed to perform best under very specific weather or terrain conditions. If, once you've gained experience with your new e-bike, you feel that a different tire might better suit your riding needs, your authorized retailer can help you select the most appropriate design.

The size, pressure rating, and on some high-performance tires, the specific recommended use, are marked on the sidewall of the tire [see fig. 20]. The part of this information which is most important to you is Tire Pressure. But some wheel rim

manufacturers also specify maximum tire pressure with a label on the rim.

The best and safest way to inflate a bicycle tire to the correct pressure is with a bicycle pump which has a built-in pressure gauge.

**⚠ WARNING: There is a safety risk in using gas station air hoses or other air compressors. They are not made for bicycle tires. They move a large volume of air very rapidly, and will raise the pressure in your tire very rapidly, which could cause the tube to explode.**

**⚠ CAUTION: Pencil type automotive tire gauges can be inaccurate and should not be relied upon for consistent, accurate pressure readings. Instead, use a high quality dial or digital gauge.**

Tire pressure is given either as maximum pressure or as a pressure range. How a tire performs under different terrain or weather conditions depends largely on tire pressure. Inflating the tire to near its maximum recommended pressure can help prevent pinch flats (punctures caused by the tire compressing the inner tube against the rim), but also produces the harshest ride. High pressures work best on smooth, dry pavement.

Very low pressures, at the bottom of the recommended pressure range, give the best performance on smooth, slick terrain such as hard-packed clay, and on deep, loose surfaces such as deep, dry sand. Low pressures can also

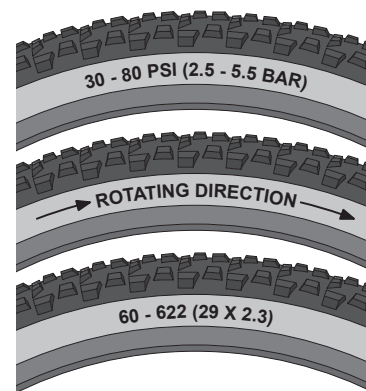


fig. 20

provide enhanced traction and/or a smoother ride sensation over technical mountain bike trails.

Tire pressure that is too low for your weight and the riding conditions can cause a puncture of the tube by allowing the tire to deform sufficiently to pinch the inner tube between the rim and the riding surface, referred to as a "pinch flat" above. This may also result in rim damage.

**⚠ WARNING: Never inflate a tire beyond the maximum pressure marked on the tire's sidewall or the wheel rim. If the maximum pressure rating for the wheel rim is lower than the maximum pressure shown on the tire, always use the lower rating. Exceeding the recommended maximum pressure may blow the tire off the rim, which could cause damage to the e-bike and injury to the rider and bystanders.**

**⚠ WARNING: Never ride a tire inflated below the minimum pressure marked on the tire's sidewall. Tire pressure below the minimum may cause a flat tire and/or the tire to detach from the rim while riding, resulting in a loss of control or crash causing serious injury or death, as well as damage to the tire, tube, and/or wheel rim.**

Ask your authorized retailer to recommend the best tire pressure for the kind of riding you will most often do, and have the authorized retailer inflate your tires to that pressure. Then, check inflation as described on **Page 21, Section 7: "Safely Operating Your E-bike", subsection B: "Mechanical Safety Check"**, so you'll know how correctly inflated tires should look and feel when you don't have access to a gauge. Some tires may need to be brought up to pressure every week or two, so it is important to check your tire pressures before every ride.

Some special high-performance tires have unidirectional

treads: their tread pattern is designed to work better in one direction than in the other. The sidewall marking of a unidirectional tire will have an arrow showing the correct rotation direction [**see fig. 20**]. If your e-bike has unidirectional tires, be sure that they are mounted to rotate in the correct direction.

**A note on tubeless: Many of our e-bikes arrive with tubeless-compatible rims and tubeless-ready tires. Most of us here at Kona are believers in running tubeless as it can greatly reduce the chance of getting a pinch flat, allows for lower overall tire pressures, creates more traction and a smoother riding sensation. However, tubeless is not for everyone and while we've chosen tubeless ready tires and tubeless compatible rims that we find work well, tubeless setup can prove to be challenging and frustrating for some people, and it requires monitoring your tire pressure more frequently.**

**We recommend you discuss the merits and drawbacks of tubeless with your authorized retailer, and also double check with your authorized retailer that both your rims, and your tires, are designed to be set up tubeless.**

**2. TUBELESS RIMS AND TIRES:** Some e-bikes come equipped with rims (the circular, outermost portion of the wheel to which the tire is mounted) and tires that can be set up without the use of an inner tube. Tubeless rims and tires have special rim and tire bead profiles that form a seal and retain air when properly mounted. Tubeless rims come in a variety of styles and may require additional components such as a rim tape, valve cores, sealant and tubeless-compatible tires to complete the tubeless setup. The rim manufacturer may identify the rims as "tubeless compatible" or "tubeless ready" depending on which components are required. If you choose to utilize the tubeless features of your rims, carefully review the rim manufacturer's instructions regarding what additional components you need

to convert to or maintain a tubeless setup.

Tubeless rims have a wide range of profiles that can affect the type of tubeless tire that can be mounted to the rim. For example, your rim manufacturer may refer to the rim profile as “hooked” or “hookless” depending on whether there is a hook protruding on the inside of the rim.

Likewise, the bead profile of tubeless tires differs between tire manufacturers. Given the wide range of tubeless tires and rims available, the compatibility of tubeless tires with different types of tubeless rims varies significantly. If you choose to run a tubeless setup, make sure the tires and rims are compatible. Only use tubeless tires that have been approved by the rim manufacturer or tire manufacturer for use on your rims. If you have questions about tubeless tire and rim compatibility, talk to your local authorized retailer.

Mounting tubeless tires on a tubeless rim requires specialized knowledge, skills, and equipment. A tubeless setup may require the installation of additional components, including rim tape, valve cores, and sealant. Carefully review the instructions from both the rim and tire manufacturer regarding how to set up tubeless tires before attempting to do so. If you have any concerns about properly setting up your rims and tires to run as a tubeless setup, ask your local authorized retailer to mount the tires for you.

**⚠️ WARNING:** Riding on an improperly installed, incompatible or damaged tubeless tire and rim combination can cause the tire to unexpectedly lose pressure and detach from the rim, resulting in a crash causing serious injury or death. Ensure the components are compatible according to the component manufacturers before installation.

**⚠️ CAUTION:** During installation, an incompatible or damaged tubeless tire and rim combination can cause the tire to unexpectedly lose pressure and tire

sealant and detach from the rim, resulting in damage to the wheel or other components, and may injure the installer. Use of eye and ear protection is recommended. Ensure the components are compatible according to the component manufacturers before installation.

**3. TIRE AND RIM WIDTH/DIAMETER:** Wheel rims and tires come in a wide range of diameters [fig. 21] and widths [fig. 22]. The nominal diameter of the rim (A) must match the nominal diameter of the tire (B), and the width of the rim (C) must be compatible with the width of the tire (D).

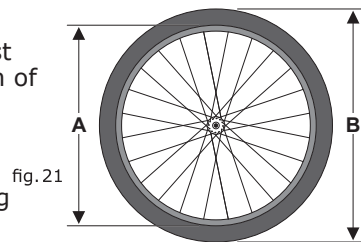


fig. 21

Always follow the rim and tire manufacturer's recommendations concerning tire models and sizes that are compatible with your specific rims.

**⚠️ WARNING:** Failure to use a compatible tire and rim combination can cause the tire to unexpectedly lose pressure and detach from the rim, resulting in a crash causing serious injury or death. Ensure the components are compatible according to the component manufacturers before installation.




fig. 22

**4. TIRE CLEARANCE:** The diameter and width of the original equipment wheels and tires on your e-bike have been selected to ensure they provide adequate clearance between the rotating tire and wheel, and the frame, fork,



or other components. Any change to your wheels or tires can affect this clearance.

Tires that are marked as being the same size may have different widths when installed, properly inflated and mounted on your e-bike. Always verify your tire clearance with the tires mounted and fully inflated even if the replacement tires are marked as being the same size as the tires that are being replaced.

Minimum clearance between a properly inflated tire and any part of the e-bike typically should be at least 6mm [fig. 23a & 23b]. Some regulations allow for clearance as low as 1.6mm. Please refer to your local authorized retailer or your e-bike manufacturer for additional information about tire clearance.

Always maintain enough clearance between the rotating tire and rim [fig. 23a & 23b], and the frame, fork, or other components. Regularly inspect the frame and fork for damage, as well as the area around the wheel for debris or objects that could become stuck.

When riding your e-bike, the tires must not be able to contact the fork, frame or any components when a suspension system is fully compressed or the wheels are subjected to flex from side loads. For example, with a

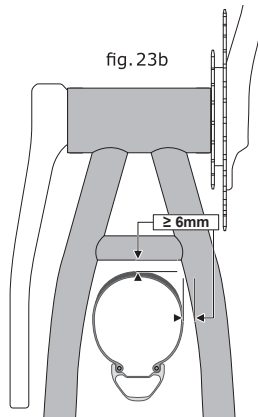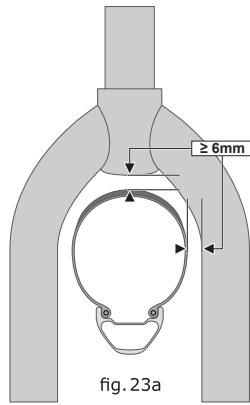

suspension fork, the front tire must clear the fork crown when the fork is fully compressed.

**⚠ WARNING: Inadequate tire clearance can allow debris or objects to become trapped or cause the wheels to stop unexpectedly, which could cause a crash resulting in serious injury or death.**

**⚠ WARNING: Inadequate tire clearance that results in contact between the tire and any part of the bicycle can result in damage which can lead to failure, which could cause a crash resulting in serious injury or death.**

If you have mounted additional accessories or components on your e-bike, particularly fenders, these products may require additional clearance between the tire/wheel and the accessory or component. You should verify the required clearance for any accessory or component mounted on your e-bike with the manufacturer, and do not use the product if the specified clearance cannot be maintained. For additional information on changing components or adding accessories, see **Page 31, Section 7: "Safely Operating Your E-bike"**, **subsection L: "Changing Components or Adding Accessories"**.

**⚠ WARNING: Any accessory or component attached to, on or near a rotating wheel poses a risk of contacting or stopping the wheel, leading to a crash resulting in serious injury or death. Before every ride check to ensure that all such accessories and components, and the fasteners used to attach them, are securely mounted to your e-bike.**

**⚠ WARNING: Any object that unexpectedly and abruptly stops the rotation of the front wheel can cause the e-bike and rider to pitch forward [fig. 6], which can result in serious injury or death.**

**5. TIRE VALVES:** There are primarily two kinds of bicycle tire valves: The Schrader Valve and the Presta Valve. The bicycle pump you use must have the fitting appropriate to the valve stems on your bicycle.

The Schrader valve [fig. 24a] is like the valve on a car tire. To inflate a Schrader valve tire remove the valve cap and clamp the pump fitting onto the end of the valve stem. To let air out of a Schrader valve, depress the pin in the end of the valve stem with the end of a key or other appropriate object.




fig. 24a

The Presta valve [fig. 24b] has a narrower diameter and is only found on bicycle tires. To inflate a Presta valve tube using a Presta headed bicycle pump, remove the valve cap; unscrew (counterclockwise) the valve stem lock nut; and push down on the valve stem to free it up. Then push the pump head on to the valve head, and inflate. To inflate a Presta valve with a Schrader pump fitting, you'll need a Presta adapter (available at your bike shop) which screws on to the valve stem once you've freed up the valve. The adapter fits into the Schrader pump fitting. Close the valve after inflation. To let air out of a Presta valve, open up the valve stem lock nut and depress the valve stem.



fig. 24b

**⚠ WARNING:** We highly recommend that you carry a spare inner tube when you ride your bike. Patching a tube is an emergency repair. If you do not apply the patch correctly or apply several patches, the tube can fail, resulting in possible tube failure, which could cause you to lose control and fall. Replace a patched tube as soon as possible.

## 12. MAINTANING & SERVICING YOUR E-BIKE

### A) SERVICING THE ELECTRICAL DRIVE SYSTEM

Your e-bike requires regular inspection, maintenance and service by a qualified technician to ensure the proper and safe function, performance and maximum life expectancy of your e-bike and its components. Exposure to road salt, rain, dirt or snow, can result in corrosion/deterioration of certain e-bike components. If any malfunctions or problems occur, or if you have any questions related to component installation, adjustment or maintenance, please refer to your authorized retailer for additional information.

Service to the drive system components (motor, battery, display(s), sensor(s), wiring, software/firmware updates) should always be performed by an authorized retailer. While it is recommended to have all service done by an authorized retailer, depending on mechanical competence and ease of required work, some service to non-drive-system-related components can be performed by the owner, with proper tools and knowledge. For example, the most basic services would include cleaning the e-bike or lubricating the chain. More involved services would include adjusting brakes or gears or fixing a flat tire that requires detaching electrical wiring or components.

**⚠ WARNING:** Modifying your e-bike or attempting to service it without having the requisite tools, skills and knowledge can result in damage to your e-bike or create a risk of fire or electrical shock resulting in serious injury or death.

**⚠ WARNING:** The drive system does not contain any user-serviceable parts. Any service should be performed by a qualified technician. Do not attempt to open, disassemble, modify, adjust or service any parts of the drive system components. Any tampering with the internals of the motor, battery or other drive system components can result in damage, which can cause serious personal injury or death.

Follow all service recommendations made by the manufacturer. Please refer to your authorized retailer for any questions about e-bike service intervals.

- Maintain your battery as outlined on **Page 4, Section 3:** “General Lithium-Ion Battery Safety” and **Page 11, Section 6:** “E-bike Battery Safety”.
- During periodic inspections, also inspect the battery terminals for any signs of corrosion. Also inspect any visible wiring. Frayed or otherwise damaged wires, loose or corroded plugs, or bad connections can result in damage to the drive system and should be inspected and replaced as necessary by your authorized retailer.
- Do not apply any cleaning agents, paint or chemicals to any of the drive system components on your e-bike, including the battery. Applying paint to these components can result in failure.
- Dirt and salt from riding in winter or near the ocean, as well as sweat, can be damaging to bicycle components. This includes e-bike drive system and wiring parts. Regularly keep the e-bike clean.
- When performing service on an e-bike, if possible, remove the battery before starting maintenance. If the battery is integrated into the frame and not easily removed, make sure the system is turned off unless absolutely necessary for a specific service, and make sure you’re not at risk of injury should the system unexpectedly turn on and the drive system start rotating.
- Don’t turn the e-bike upside down onto the handlebars and seat. This can result in damage to any handlebar-mounted display or controller components.

**⚠ WARNING: Technological advances have made e-bikes and bicycle components more complex, and the pace of innovation is increasing. It is impossible for this manual to provide all the information required**

**to properly repair and/or maintain your e-bike. In order to help minimize the chances of an accident and possible injury, it is critical that you have any repair or maintenance which is not specifically described in this manual performed by your authorized retailer. Equally important is that your individual maintenance requirements will be determined by everything from your riding style to geographic location. Consult your authorized retailer for help in determining your maintenance requirements.**

**⚠ WARNING: Many e-bike service and repair tasks require special knowledge and tools. Do not begin any adjustments or service on your e-bike without learning from your authorized retailer how to properly complete them. Improper adjustment or service may result in damage to the e-bike or could cause an accident which can cause serious injury or death.**

## **B) SERVICING THE MECHANICAL PARTS OF YOUR E-BIKE**

If you want to learn to do major service and repair work on your e-bike, you have three options:

- 1.** Ask your authorized retailer for copies of the manufacturer’s installation and service instructions for the components on your e-bike, or contact the component manufacturer.
- 2.** Ask your authorized retailer to recommend a book on bicycle repair.
- 3.** Ask your authorized retailer about the availability of bicycle repair courses in your area.

We recommend that you ask your authorized retailer to check the quality of your work the first time you work on something and before you ride the e-bike, just to make sure that you did everything correctly. Since that will

require the time of a mechanic, there may be a modest charge for this service. We also recommend that you ask your authorized retailer for guidance on which spare parts, such as tires, inner tubes, brake pads, chain links or pins, light bulbs, batteries, patch kit, lubricants, etc. are appropriate for you to keep as spares once you have learned how to replace such parts when they require replacement.

## C) SERVICE INTERVALS

Some service and maintenance can and should be performed by the owner, and require no special tools or knowledge beyond what is presented in this manual.

The following are examples of the type of service you should perform yourself. All other service, maintenance and repair should be performed in a properly equipped facility by a qualified e-bike mechanic using the correct tools and procedures specified by the manufacturer.

**1. Break-in Period:** Your e-bike will last longer and work better if you break it in before riding it hard. Control cables and wheel spokes may stretch or “seat” when a new e-bike is first used and may require readjustment by your authorized retailer. Your Mechanical Safety Check will help you identify some things that need readjustment. Refer to **Page 21, Section 7: “Safely Operating Your E-bike”, subsection B: “Mechanical Safety Check”**. But even if everything seems fine to you, it’s best to take your e-bike back to the authorized retailer for a checkup. Authorized retailers typically suggest you bring the e-bike in for a 30-day checkup. Another way to judge when it’s time for the first checkup is to bring the e-bike in after three to five hours of hard off-road use, or about 10 to 15 hours of on-road or more casual off-road use. But if you think something is wrong with the e-bike, take it to your authorized retailer before riding it again.

**2. Before every ride:** Mechanical Safety Check (**Page 21, Section 7: “Safely Operating Your E-bike”, subsection B: “Mechanical Safety Check”**).

**3. After every long or hard ride; if the e-bike has been exposed to water or grit; or at least every 100 miles/160km:** Clean the e-bike and lightly lubricate the chain’s rollers with a good quality bicycle chain lubricant. Wipe off excess lubricant with a lint-free cloth. Lubrication is a function of climate. Talk to your authorized retailer about the best lubricants and the recommended lubrication frequency for your area.

**4. After every long or hard ride or after every 10 to 20 hours of riding:**

- Squeeze the front brake and rock the e-bike forward and back. Everything feel solid? If you feel a clunk with each forward or backward movement of the e-bike, you probably have a loose headset. Have your authorized retailer check it.
- Lift the front wheel off the ground and swing it from side to side. Feel smooth? If you feel any binding or roughness in the steering, you may have a tight headset. Have your authorized retailer check it.
- Grab one pedal and rock it toward and away from the centerline of the e-bike; then do the same with the other pedal. Anything feel loose? If so, have your authorized retailer check it.
- Take a look at the brake pads. Are they starting to look worn or not hitting the wheel rim squarely? Time to have the authorized retailer adjust or replace them.
- Carefully check the control cables and cable housings. Any rust? Kinks? Fraying? If so, have your authorized retailer replace them.
- Squeeze each adjoining pair of spokes on either side of each wheel between your thumb and index finger. Do they all feel about the same? If any feel loose, have your authorized retailer check the wheel for tension and trueness.

- Check the tires for excess wear, cuts or bruises. Have your authorized retailer replace them if necessary.
- Check the wheel rims for excess wear, dings, dents and scratches. Consult your authorized retailer if you see any rim damage.
- Check to make sure that all parts and accessories are still secure, and tighten any which are not.
- Check the frame, particularly in the area around all tube joints; the handlebars; the stem; and the seatpost for any deep scratches, cracks or discoloration. These are signs of stress-caused fatigue and indicate that a part is at the end of its useful life and needs to be replaced. *See also Appendix B, [p. 69].*

**5. Disc brakes require a different set of inspection steps. Check for these issues before every ride:**

- Pads rubbing on rotors.
- Worn-out pads (which can lead to over-extended pistons).
- Pistons that are stuck and/or won't retract fully.
- Disc rotors that are bent and need straightening by the authorized retailer.
- Hydraulic brakes that feel "sponge-y" and/or levers that can be depressed all the way to the grips w/o generating adequate stopping power (due to trapped air and/or leaks).

**⚠ WARNING: Like any mechanical device, an e-bike and its components are subject to wear and stress. Different materials and mechanisms wear or fatigue from stress at different rates and have different life cycles. If a component's life cycle is exceeded, the component can suddenly and catastrophically fail, causing serious injury or death to the rider. Scratches, cracks, fraying and discoloration are signs of stress-caused fatigue and indicate that a part is at the end of its useful life and needs to be replaced. While**

**the materials and workmanship of your e-bike or of individual components may be covered by a warranty for a specified period of time by the manufacturer, this is no guarantee that the product will last the term of the warranty. Product life is often related to the kind of riding you do and to the treatment to which you submit the e-bike. The e-bike's warranty is not meant to suggest that the e-bike cannot be broken or will last forever. It only means that the e-bike is covered subject to the terms of the warranty. Please be sure to read Appendix A, Intended Use of your bicycle and Appendix B, The Lifespan of your e-bike and its components, starting on page 67.**

**6. As required:** If either brake lever fails the Mechanical Safety Check (**Page 21, Section 7:** "Safely Operating Your E-bike", **subsection B:** "Mechanical Safety Check"), don't ride the e-bike. Have your authorized retailer check the brakes. If the chain won't shift smoothly and quietly from gear to gear, the derailleur is out of adjustment. See your authorized retailer.

**7. Please refer to your authorized retailer for any questions about e-bike service intervals.**

**D) IF YOUR E-BIKE SUSTAINS AN IMPACT**

First, check yourself for injuries, and take care of them as best you can. Seek medical help if necessary.

Next, check your e-bike for damage. After any crash, take your e-bike to your authorized retailer for a thorough check. Carbon composite components, including frames, wheels, handlebars, stems, cranksets, brakes, etc. which have sustained an impact must not be ridden until they have been disassembled and thoroughly inspected by a qualified mechanic. **See also Appendix B, The Lifespan of your e-bike and its components, [p. 69].**

**⚠ WARNING: A crash or other impact can put extraordinary stress on bicycle components, causing them to fatigue prematurely. Components suffering from stress fatigue can fail suddenly and catastrophically, causing loss of control, serious injury or death.**

## 13. ABOUT YOUR KONA AUTHORIZED RETAILER

Your Kona authorized retailer is here to help you get the e-bike and accessories which are most appropriate for the kind of riding that you intend to do; and to help you maintain your equipment so that you can get the maximum enjoyment from it. Your e-bike shop's staff has the knowledge, tools and experience to give you reliable advice and competent service. Your authorized retailer carries the products of a variety of manufacturers so that you can have the choices which best meet your needs and your budget.

But your authorized retailer's staff can't make decisions for you; nor can they assume responsibility for your lack of knowledge, experience, skill or common sense. They can explain to you how something works, or what part or accessory will meet your special needs, but they can't know your questions or your needs unless you tell them.

If you have a problem with your e-bike or your riding, talk to your authorized retailer. Make sure that the authorized retailer understands your problem or question, and make sure that you really understand the answers.

### A) COMFORT & PERFORMANCE ACCESSORIES

Once the e-bike fit (frame size, saddle position and angle, stem length and rise) is correct, the saddle becomes the single most important comfort accessory.

The comfort of a bicycle saddle depends much more on how the saddle shape relates to the rider's body than on the

thickness or material of the padding. Bicycle manufacturers select a saddle shape based on their best guess of what's likely to be comfortable for most buyers of that particular e-bike model. But that doesn't mean it's going to be the most comfortable shape for you. That's why your authorized retailer stocks saddles which offer a variety of shapes, padding, covering materials and prices. If the saddle on your new e-bike is uncomfortable, ask your authorized retailer to suggest an alternative.

If you're planning to spend an hour or more at a time on your e-bike, get a pair of cycling gloves. Their padded palms help keep your hands from getting numb from the vibration of the handlebars (the numbness, called carpal tunnel syndrome, can become quite painful if not taken care of), and they'll provide some abrasion protection for your hands if you fall.

Cycling shorts and cycling jerseys are both performance and comfort accessories. There are two kinds of cycling shorts: the traditional skin-tight Lycra shorts and loose-fit cycling shorts. Both are designed to reduce friction and chafing. The washable seat pad within the shorts both cushions and protects against chafing. Wear them without underwear to avoid the undergarment's bunching up and chafing. Also available are undergarments designed to reduce chafing when worn with regular street clothes. The jerseys have pockets in the back, so that the things you carry don't bang around when you ride. Many are made of special materials with properties that improve riding comfort and performance.

It's important to drink plenty of liquids before and during exercise. A water bottle is an essential companion on a longer ride.

Your authorized retailer has many other comfort and performance accessories that can increase your cycling enjoyment.

## KONAWORLD WEBSITE

If you have further Technical questions, contact us at:  
[konaworld.com/pages/contact-us](http://konaworld.com/pages/contact-us)  
 The KonaWorld web site is located at: [konaworld.com](http://konaworld.com)

## 14. LIMITED WARRANTY

Kona Bicycle Company ( "Kona" ) makes the following limited Warranty:

### COMPLETE BIKES

#### ONE YEAR LIMITED WARRANTY ON COMPLETE BICYCLE (USA & CANADA)

Kona warrants to the original owner that this new Kona bicycle will be free from defects in materials and workmanship for a period of one year from the original date of purchase, when purchased in the United States, or Canada and used under normal conditions. During this one-year period, Kona will, at its sole discretion, repair or replace any parts found to be defective and covered under this limited warranty. The original owner is responsible for all labor costs associated with the repair or replacement of these parts.

#### TWO YEAR LIMITED WARRANTY ON COMPLETE BICYCLE (EUROPE)

Kona warrants to the original owner that this newly purchased Kona bicycle shall be free of defective materials and workmanship for the two-year period stated under EU consumer protection laws, dated from the original purchase and subject to normal conditions and use. During this two-year period, Kona shall repair or replace, at its sole option, all parts that are found by Kona to be defective and therein subject to this limited warranty.

#### E-BIKE COMPONENTS LIMITED WARRANTY

Kona electric pedal-assist bikes come with a two-year warranty on the electronic system (excluding the battery), provided by the component manufacturer. This warranty does not cover damage caused by accidents or user errors. Battery warranties are provided separately by each battery manufacturer—please visit their respective websites for specific terms and conditions.

### FRAMES AND FORKS

#### LIFETIME LIMITED WARRANTY ON BICYCLE FRAME AND RIGID FORK

Kona warrants to the original owner that the Kona frame and/or Kona

fork\* of this new Kona bicycle, purchased from an authorized Kona dealer, is free from defects in materials or workmanship for the lifetime of the original owner. If Kona determines that the frame and/or fork is defective, Kona will repair or replace it. Please note that the color on the warranty frame and/or fork may vary from the original. The original owner is responsible for all labor and shipping charges connected with the repair or replacement of the bicycle frame and/or fork.

\*As of September 1, 2025 – Carbon models Libre G2, Ouroboros, Process G3 & Hei Hei G10 qualify for lifetime frame warranty. Any new carbon models introduced after this date will also qualify for the same warranty.

If you have a warranty concern with your bicycle, please head to your nearest Kona dealer and they will assist you.

### GENERAL PROVISIONS

This limited warranty is available only to the original owner of this Kona bicycle purchased from an authorized Kona dealer, and it shall remain in force only as long as the original owner retains ownership of the Kona bicycle. This limited warranty is not transferable. To obtain service under this Limited Warranty, the original owner must deliver the Kona bicycle, and the bill of sale or other dated proof of purchase document identifying the Kona bicycle by frame number/serial number, to an authorized Kona dealer. This Limited Warranty does not apply to normal wear and tear, corrosion, nor to defects, malfunctions or failures that result from the abuse, neglect, improper maintenance, alteration, modification, accident, or misuse (including without limitation bicycle racing, bicycle motocross, stunt bicycling, commercial use or rental use) of the Kona bicycle. Damage caused by transporting a bicycle, especially across the tailgate of a pickup truck—even when a pad is used—voids warranty.

THIS LIMITED WARRANTY IS THE ONLY EXPRESS OR LIMITED WARRANTY APPLICABLE TO KONA BICYCLES. ANY IMPLIED WARRANTIES, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL BE LIMITED IN SCOPE AND DURATION IN ACCORDANCE WITH THIS LIMITED WARRANTY. KONA SHALL NOT BE RESPONSIBLE FOR ANY DIRECT, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES SUFFERED BY ANY PARTY. THE FOREGOING STATEMENTS OF WARRANTY ARE EXCLUSIVE AND IN LIEU OF ALL OTHER REMEDIES.

THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS; YOU MAY ALSO HAVE OTHER LEGAL RIGHTS WHICH VARY FROM STATE TO STATE OR PROVINCE TO PROVINCE. SOME STATES OR PROVINCES DO NOT ALLOW LIMITATIONS OR EXCLUSION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES; SO, THE ABOVE LIMITATIONS AND EXCLUSIONS SET FORTH IN THIS LIMITED WARRANTY MAY NOT APPLY TO YOU.

THE LIMITED WARRANTY SET FORTH HEREIN MAY NOT BE EXTENDED, ENLARGED OR OTHERWISE MODIFIED BY ANY KONA DEALER, AGENT OR EMPLOYEE, AND KONA DOES NOT ASSUME ANY LIABILITY OR MAKE ANY WARRANTY EXCEPT AS STATED IN THE LIMITED WARRANTY.

WARRANTY VALID ONLY IF BICYCLE IS ASSEMBLED BY AN AUTHORIZED KONA DEALER.

**NOTE: Warranty is made only to the original owner of this Kona bicycle purchased from a Kona authorized retailer, and it shall remain in force only as long as the original owner retains ownership of the Kona bicycle. This limited warranty is not transferable.**

## CRASH REPLACEMENT

Pick the wrong line? Underestimate the power of a curb? It's OK, we've got your back. For the entirety of your warranty period, we'll offer you awesome pricing on a replacement frame and/or fork in non-warranty situations. Here's how it works:

- For the original owner only.
- Available only through your local Kona dealer.
- Bring your proof—original sales receipt + serial number.
- Shipping & labor are on you, but the savings are all yours.
- Exact parts/colors depend on what's in stock (surprise upgrades can happen!).

## Appendix A

### Intended Use of Your Bicycle



**WARNING: Understand your bike and its intended use. Choosing the wrong bicycle for your purpose can be hazardous. Using your bike the wrong way is dangerous.**

No one type of bicycle is suited for all purposes. Your authorized retailer can help you pick the “right tool for the job” and help you understand its limitations. There are many types of bicycles and many variations within each type. There are many types of mountain, road, racing, hybrid, touring, cyclocross and gravel bicycles.


There are also bicycles that mix features. For example, there are road/racing bikes with triple cranks. These bikes have the low gearing of a touring bike, the quick handling of a racing bike, but are not well suited for carrying heavy loads on a tour. For that purpose you want a touring bike.

Within each type of bicycle, one can optimize for certain purposes. Visit your bicycle shop and find someone with expertise in the area that interests you.

Do your own homework. Seemingly small changes such as the choice of tires can improve or diminish the performance of a bicycle for a certain purpose.

On the following pages, we generally outline the intended uses of various types of bikes.

**Industry usage conditions are generalized and evolving. Consult your authorized retailer about how you intend to use your bike.**




### General Purpose and Smooth Mixed Terrain Riding CONDITION 2

Bikes designed for riding Condition 1 (on paved roads only), plus smooth gravel roads and improved trails with moderate grades where the tires do not lose ground contact.

**INTENDED** For paved roads, gravel or dirt roads that are in good condition, and bike paths.  
**NOT INTENDED** For off-road or mountain bike use, or for any kind of jumping. Some of these bikes have suspension features, but these features are designed to add comfort, not off-road capability. Some come with relatively wide tires that are well suited to gravel or dirt paths. Some come with relatively narrow tires that are best suited to faster riding on pavement. If you ride on gravel or dirt paths, carry heavier loads or want more tire durability, talk to your authorized retailer about wider tires and ensure that you have adequate clearance between your tire and frame/fork.

**Rove HD, Dew-E DL, Dew-E, Dew HD, Ecoco, Coco HD**



### Cross-Country, Marathon, Hardtails CONDITION 3

Bikes designed for riding Conditions 1 and 2, plus rough trails, small obstacles, and smooth technical areas, including areas where momentary loss of tire contact with the ground may occur. NOT jumping. All mountain bikes without rear suspension are Condition 3, and so are

some lightweight rear suspension models.

**INTENDED** For cross-country riding and racing which ranges from mild to aggressive over intermediate terrain (e.g., hilly with small obstacles like roots, rocks, loose surfaces and hard pack and depressions). Cross-country and marathon equipment (tires, shocks, frames, drive trains) are lightweight, favoring nimble speed over brute force. Suspension travel is relatively short since the bike is intended to move quickly on the ground.

**NOT INTENDED** For Hardcore Freeriding, Extreme Downhill, Dirt Jumping, Slopestyle, or very aggressive or extreme riding. No spending time in the air landing hard and hammering through obstacles.

**TRADE OFF** Cross-Country bikes are lighter, faster to ride uphill, and more nimble than All-Mountain bikes. Cross-Country and Marathon bikes trade off some ruggedness for pedalling efficiency and uphill speed.

**EL Kahuna SUV, EL Kahuna**



## All Mountain CONDITION 4

Bikes designed for riding Conditions 1, 2, and 3, plus rough technical areas, moderately sized obstacles, and small jumps.

**INTENDED** For trail and uphill riding.

All-Mountain bicycles are: (1) more heavy duty than cross country bikes, but less heavy duty than Freeride bikes,

(2) lighter and more nimble than Freeride bikes,

(3) heavier and have more suspension travel than a cross country bike, allowing them to be ridden in more difficult terrain, over larger obstacles and moderate jumps,

(4) intermediate in suspension travel and use components that fit the intermediate intended use, (5) cover a fairly wide range of intended use, and within this range are models that are more or less heavy duty. Talk to your retailer about your needs and these models.

**NOT INTENDED** For use in extreme forms of jumping/riding such as hardcore mountain, Freeriding, Downhill, North Shore, Dirt Jumping, Hucking etc. No large drop offs, jumps or launches (wooden structures, dirt embankments) requiring long suspension travel or heavy duty components; and no spending time in the air landing hard and hammering through obstacles.

**TRADE OFF** All-Mountain bikes are more rugged than cross country bikes, for riding more difficult terrain.

All-Mountain bikes are heavier and harder to ride uphill than cross country bikes. All-Mountain bikes are lighter, more nimble and easier to ride uphill than Freeride bikes.

All-Mountain bikes are not as rugged as Freeride bikes and must not be used for more extreme riding and terrain.

**Remote X, Remote 160 CR, Remote 160 DL,  
Remote 160, Remote 130, Remote**

## Appendix B

### The Lifespan of Your E-bike and its Components

#### 1. Nothing Lasts Forever, Including Your E-bike

When the useful life of your e-bike or its components is over, continued use is hazardous.

Every e-bike and its component parts have a finite, limited useful life. The length of that life will vary with the construction and materials used in the frame and components; the maintenance and care the frame and components receive over their life; and the type and amount of use to which the frame and components are subjected. Use in competitive events, trick riding, ramp riding, jumping, aggressive riding, riding on severe terrain, riding in severe climates, riding with heavy loads, commercial activities and other types of non-standard use can dramatically shorten the life of the frame and components. Any one or a combination of these conditions may result in an unpredictable failure.

All aspects of use being identical, lightweight e-bikes and their components will usually have a shorter life than heavier e-bikes and their components. In selecting a lightweight e-bike or components you are making a tradeoff, favoring the higher performance that comes with lighter weight over longevity. So, if you choose lightweight, high-performance equipment, be sure to have it inspected frequently.

You should have your e-bike and its components checked periodically by your authorized retailer for indicators of stress and/or potential failure, including cracks, deformation, corrosion, paint peeling, dents, and any other indicators of potential problems, inappropriate use or abuse. These are important safety checks and very important to help prevent accidents, bodily injury to the rider and shortened product life.

## 2. Perspective

Today's high-performance bicycles require frequent and careful inspection and service. In this Appendix we try to explain some underlying material science basics and how they relate to your bicycle. We discuss some of the trade-offs made in designing your bicycle and what you can expect from your bicycle; and we provide important, basic guidelines on how to maintain and inspect it. We cannot teach you everything you need to know to properly inspect and service your bicycle; and that is why we repeatedly urge you to take your bicycle to your authorized retailer for professional care and attention.

**⚠️ WARNING: Frequent inspection of your bike is important to your safety. Follow the Mechanical Safety Check on Page 21, Section 7: "Safely Operating Your E-bike", subsection B: "Mechanical Safety Check" of this Manual before every ride. Periodic, more detailed inspection of your e-bike is important. How often this more detailed inspection is needed depends upon you. You, the rider/owner, have control and knowledge of how often you use your e-bike, how hard you use it and where you use it. Because your authorized retailer cannot track your use, you must take responsibility for periodically bringing your e-bike to your authorized retailer for inspection and service. Your authorized retailer will help you decide what frequency of inspection and service is appropriate for how and where you use your e-bike. For your safety, understanding and communication with your authorized retailer, we urge you to read this Appendix in its entirety. The materials used to make your e-bike determine how and how frequently to inspect. Ignoring this WARNING can lead to frame, fork or other component failure, which can result in serious injury or death.**

### A) UNDERSTANDING METALS

Steel is the traditional material for building bicycle frames.

It has good characteristics, but in high-performance e-bikes, steel has been largely replaced by aluminum and occasionally titanium. The main factor driving this change is interest in lighter e-bikes by cycling enthusiasts.

### Properties of Metals

Please understand that there is no simple statement that can be made that characterizes the use of different metals for e-bikes. What is true is how the metal chosen is applied is much more important than the material alone. It's important to consider how the e-bike is designed, tested, manufactured, and supported along with the characteristics of the metal rather than seeking a simplistic answer.

Metals vary widely in their resistance to corrosion. Steel must be protected or rust will attack it. Aluminum and titanium quickly develop an oxide film that protects the metal from further corrosion. Both are therefore quite resistant to corrosion. Aluminum is not perfectly corrosion resistant, and particular care must be used where it contacts other metals and galvanic corrosion can occur.

Metals are comparatively ductile. Ductile means bending, buckling and stretching before breaking. Generally speaking, of the common e-bike frame building materials, steel is the most ductile, titanium less ductile, followed by aluminum.

Metals vary in density. Density is weight per unit of material. Steel weighs 7.8 grams/cm<sup>3</sup> (grams per cubic centimeter), titanium 4.5 grams/cm<sup>3</sup>, aluminum 2.75 grams/cm<sup>3</sup>. Contrast these numbers with carbon fiber composite at 1.45 grams/cm<sup>3</sup>.

Metals are subject to fatigue. With enough cycles of use, at high enough loads, metals will eventually develop cracks that lead to failure. It is very important that you read the section following this one, titled "The Basics of Metal Fatigue."

Let's say you hit a curb, ditch, rock, car, another cyclist or other object. At any speed above a fast walk, your body will continue to move forward, momentum carrying you over the front of the e-bike. You cannot and will not stay on the e-bike, and what happens to the frame, fork and other components is irrelevant to what happens to your body.

What should you expect from your metal frame? It depends on many complex factors, which is why we tell you that crashworthiness cannot be a design criteria. With that important note, we can tell you that if the impact is hard enough, the fork or frame may be bent or buckled. On a steel e-bike, the steel fork may be severely bent and the frame undamaged. Aluminum is less ductile than steel, but you can expect the fork and frame to be bent or buckled. Hit harder and the top tube may be broken in tension and the down tube buckled. Hit even harder still and the top tube may be broken, the down tube buckled and broken, leaving the head tube and fork separated from the main triangle.

When a metal e-bike crashes, you will usually see some evidence of this ductility in bent, buckled or folded metal.

It is now common for the main frame to be made of metal and the fork of carbon fiber. See Section B, *Understanding Composites* [p. 72]. The relative ductility of metals and the lack of ductility of carbon fiber means that in a crash scenario you can expect some bending or buckling in the metal but none in the carbon. Below a certain load the carbon fork may be intact even though the frame is damaged. Above a certain load the carbon fork will be completely broken.

### **The Basics of Metal Fatigue**

Common sense tells us that nothing that is used lasts forever. The more you use something, and the harder you use it, and the worse the conditions you use it in, the shorter its life.

Fatigue is the term used to describe accumulated damage to a part caused by repeated loading. To cause fatigue damage, the load the part receives must be great enough. A crude, often-used example is bending a paper clip back and forth (repeated loading) until it breaks. This simple definition will help you understand that fatigue has nothing to do with time or age. An e-bike in a garage does not fatigue. Fatigue happens only through use.

So what kind of "damage" are we talking about? On a microscopic level, a crack forms in a highly stressed area. As the load is repeatedly applied, the crack grows. At some point the crack becomes visible to the naked eye. Eventually it becomes so large that the part is too weak to carry the load that it could carry without the crack. At that point there can be a complete and immediate failure of the part.

One can design a part that is so strong that fatigue life is nearly infinite. This requires a lot of material and a lot of weight. Any structure that must be light and strong will have a finite fatigue life. Aircraft, race cars, motorcycles all have parts with finite fatigue lives. If you wanted an e-bike with an infinite fatigue life, it would weigh far more than any e-bike sold today. So we all make a tradeoff: the wonderful, lightweight performance we want requires that we inspect the structure.

In most cases a fatigue crack is not a defect. It is a sign that the part has been worn out, a sign the part has reached the end of its useful life. When your car tires wear down to the point that the tread bars are contacting the road, those tires are not defective. Those tires are worn out and the tread bar says "time for replacement." When a metal part shows a fatigue crack, it is worn out. The crack says "time for replacement."

**WHAT TO LOOK FOR****• ONCE A CRACK STARTS, IT CAN GROW AND GROW FAST**

Think about the crack as forming a pathway to failure. This means that any crack is potentially dangerous and will only become more dangerous.

**SIMPLE RULE 1:**

If you find a crack, replace the part.

**• CORROSION SPEEDS DAMAGE**

Cracks grow more quickly when they are in a corrosive environment. Think about the corrosive solution as further weakening and extending the crack.

**SIMPLE RULE 2:**

Clean your bike, lubricate your bike, protect your bike from salt, remove any salt as soon as you can.

**• STAINS AND DISCOLORATION CAN OCCUR NEAR A CRACK**

Such staining may be a warning sign that a crack exists.

**SIMPLE RULE 3:**

Inspect and investigate any staining to see if it is associated with a crack.

**• SIGNIFICANT SCRATCHES, GOUGES, DENTS OR SCORING CREATE STARTING POINTS FOR CRACKS**

Think about the cut surface as a focal point for stress (in fact engineers call such areas "stress risers," areas where the stress is increased). Perhaps you have seen glass cut? Recall how the glass was scored and then broke on the scored line.

**SIMPLE RULE 4:**

Do not scratch, gouge or score any surface. If you do, pay frequent attention to this area or replace the part.

**• SOME CRACKS (particularly larger ones) MAY MAKE CREAKING NOISE AS YOU RIDE**

Think about such a noise as a serious warning signal. Note that a well-maintained bicycle will be very quiet and free of creaks and squeaks.

**SIMPLE RULE 5:**

Investigate and find the source of any noise. It may not be a crack, but whatever is causing the noise should be fixed promptly.

**FACTORS THAT SHORTEN PRODUCT LIFE:**

- Hard, harsh riding style
- "Hits," crashes, jumps, other "shots" to bike
- High mileage
- Higher body weight
- Stronger, more fit, more aggressive rider
- Corrosive environment (wet, salt air, winter road salt, accumulated sweat)
- Presence of abrasive mud, dirt, sand, soil in riding environment

**FACTORS THAT LENGTHEN PRODUCT LIFE:**

- Smooth, fluid riding style
- No "hits," crashes, jumps, other "shots" to bike
- Low mileage
- Lower body weight
- Less aggressive rider
- Non-corrosive environment (dry, salt-free air)
- Clean riding environment

**Fatigue Is Not A Perfectly Predictable Science**

Fatigue is not a perfectly predictable science, but here are some general factors to help you and your authorized retailer determine how often your e-bike should be inspected. The more you fall within the "Factors that shorten product life" column above, the more frequent your need to inspect. The more you fit within the "lengthen product life" column, the less frequent your need to inspect.



**WARNING: Do not ride an e-bike or component with any crack, bulge or dent, even a small one. Riding a cracked frame, fork or component could lead to complete failure, with risk of serious injury or death.**

**B) UNDERSTANDING COMPOSITES**

All riders must understand a fundamental reality of composites: composite materials constructed of

carbon fibers are strong and light but when crashed or overloaded, carbon fibers do not bend, they break.

### What Are Composites?

The term “composites” refers to a part or parts being made up of different materials. You’ve heard the term “carbon fiber e-bike.” This really means “composite e-bike.”

Carbon fiber composites are typically a strong, light fiber in a matrix of plastic, molded to form a shape. Carbon composites are lightweight relative to metals. Steel weighs 7.8 grams/cm<sup>3</sup> (grams per cubic centimeter), titanium 4.5 grams/cm<sup>3</sup>, aluminum 2.75 grams/cm<sup>3</sup>. Contrast these numbers with carbon fiber composite at 1.45 grams/cm<sup>3</sup>.

The composites with the best strength-to-weight ratios are made of carbon fiber in a matrix of epoxy plastic. The epoxy matrix bonds the carbon fibers together, transferring overall load to other fibers, providing a smooth outer surface. The carbon fibers are the “skeleton” that supports the load.

### Why Are Composites Used?

Unlike metals, which have uniform properties in all directions (engineers call this isotropic), carbon fibers can be placed in specific orientations to optimize the structure for particular loads. The choice of where to place the carbon fibers gives engineers a powerful tool to create strong, lightweight e-bikes. Engineers may also orient fibers to suit other goals such as comfort and vibration damping. Carbon fiber composites are very corrosion resistant, much more so than most metals. Think about carbon fiber or fiberglass boats. Carbon fiber materials have a very high strength-to-weight ratio.

### What Are The Limits Of Composites?

Well designed “composite” or carbon fiber e-bikes and components have long fatigue lives, usually better than their metal equivalents.


While fatigue life is an advantage of carbon fiber, you must still regularly inspect your carbon fiber frame, fork, or components.

Carbon fiber composites are not ductile. Once a carbon structure is overloaded, it will not bend; it will break. At and near the break, there will be rough, sharp edges and maybe delamination of carbon fiber or carbon fiber fabric layers. There will be no bending, buckling, or stretching.

### If You Hit Something Or Crash, What Can You Expect From Your Carbon Fiber E-bike?

Let’s say you hit a curb, ditch, rock, car, other cyclist or other object. At any speed above a fast walk, your body will continue to move forward, the momentum carrying you over the front of the e-bike. You cannot and will not stay on the bike and what happens to the frame fork and other components is irrelevant to what happens to your body.

What should you expect from your carbon frame? It depends on many complex factors, which is why we tell you that crash worthiness cannot be a design criteria. With that important note, we can tell you that if the impact is hard enough, the fork or frame may be completely broken. Note the significant difference in behavior between carbon and metal. See Section 2. A, *Understanding Metals* [p. 70]. Even if the carbon frame was twice as strong as a metal frame, once the carbon frame is overloaded it will not bend, it will break completely.

 **WARNING: Be aware that high temperatures in a confined environment can affect the integrity of composite materials, resulting in component failure which could cause you to lose control and fall.**


## Inspection of Composite Frame, Fork & Components

**Cracks:** Inspect for cracks, broken or splintered areas. Any crack is serious. Do not ride any e-bike or component that has a crack of any size.

**Delamination:** Delamination is serious damage. Composites are made from layers of fabric. Delamination means that the layers of fabric are no longer bonded together. Do not ride any e-bike or component that has any delamination. These are some delamination clues:

- A cloudy or white area. This kind of area looks different from the ordinary undamaged areas. Undamaged areas will look glassy, shiny, or “deep,” as if one was looking into a clear liquid. Delaminated areas will look opaque and cloudy.
- Bulging or deformed shape. If delamination occurs, the surface shape may change. The surface may have a bump, a bulge, soft spot, or not be smooth and fair.
- A difference in sound when tapping the surface. If you gently tap the surface of an undamaged composite, you will hear a consistent sound, usually a hard, sharp sound. If you then tap a delaminated area, you will hear a different sound, usually duller, less sharp.

**Unusual Noises:** Either a crack or delamination can cause creaking noises while riding. Think about such a noise as a serious warning signal. A well-maintained e-bike will be very quiet and free of creaks and squeaks. Investigate and find the source of any noise. It may not be a crack or delamination, but whatever is causing the noise must be fixed before riding.

 **WARNING: Do not ride an e-bike or component with any delamination or crack. Riding a delaminated or cracked frame, fork or other component could lead to complete failure, with risk of serious injury or death.**

## C) UNDERSTANDING COMPONENTS

It is often necessary to remove and disassemble components in order to properly and carefully inspect them. This is a job for a professional e-bike mechanic with the special tools, skills and experience to inspect and service today’s high-tech high-performance e-bikes and their components.

### Aftermarket “Super Light” components

Think carefully about your rider profile as outlined in the table above. The more you fall within the “shorten product life” column, the more you must question the use of super light components. The more you fit within the “lengthen product life” column, the more likely it is that lighter components may be suitable for you. Discuss your needs and your profile very honestly with your authorized retailer. Take these choices seriously and understand that you are responsible for the changes.

### Original Equipment components

E-bike and component manufacturers test the fatigue life of the components that arrive as original equipment on your e-bike. This means that the components have met test criteria and have reasonable fatigue life. It does not mean that the original components will last forever. They won’t.





## OWNER'S RECORD

Please take a few minutes right now to complete the Owner's Record [below]. Please note that WARRANTY IS ONLY VALID if your e-bike is purchased from and assembled by an authorized Kona retailer.

Keep your receipt with this record so it can be presented to your authorized Kona retailer when service is requested. Please note that details about your e-bike—especially the serial number—may not be recorded by your Kona retailer or by the Kona Bicycle Company.

You may need this information if your e-bike is stolen:

OWNER'S NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

PURCHASE DATE \_\_\_\_\_

MODEL \_\_\_\_\_ COLOR \_\_\_\_\_

SERIAL NUMBER \_\_\_\_\_

AUTHORIZED RETAILER \_\_\_\_\_

ADDRESS \_\_\_\_\_

PHONE \_\_\_\_\_

NOTES \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



2455 Salashan  
Ferndale, Washington  
USA, 98248

© 2025 Kona Bicycle Company